

REV	DESCRIPTION OF CHANGE	REV BY	DATE

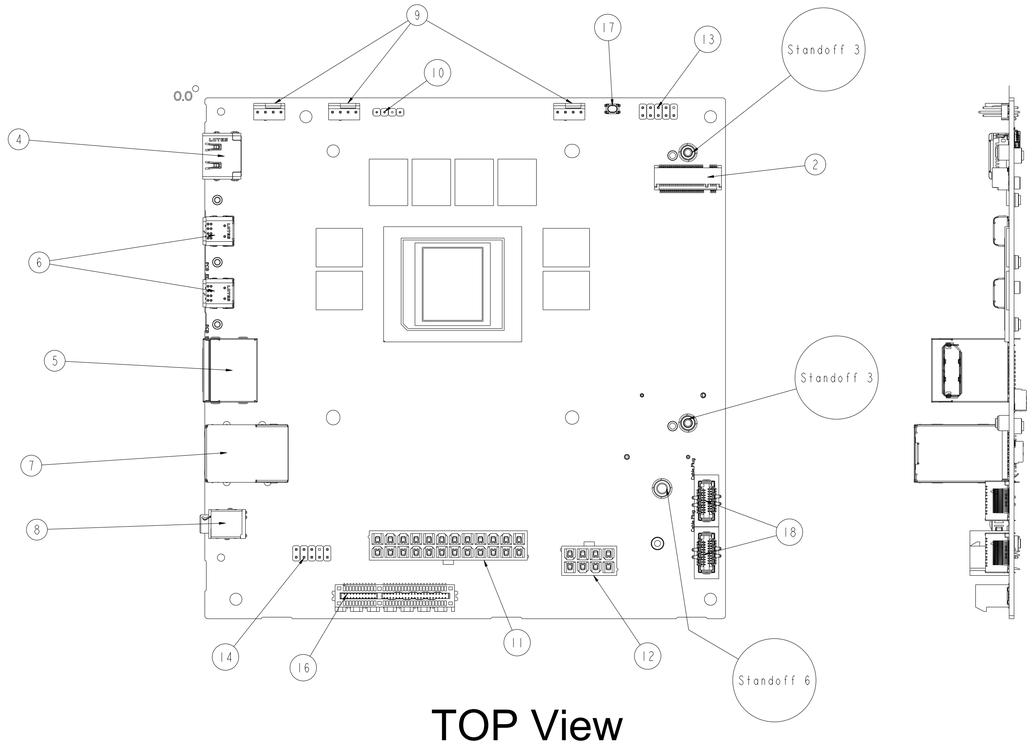

TOP View

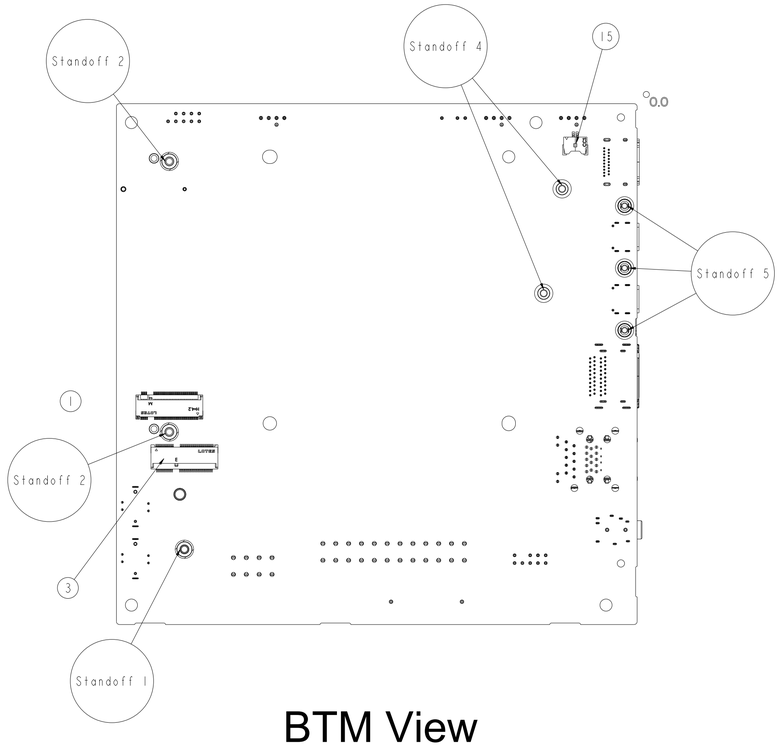

BTM View

	Item	Description	Vendor	Usage	Source
1	2280 SSD KEY M (NGFF M Key / h 4.0)(PCIE GEN4)	S SOCKET DEREN 562106-019H 67P H4 NGFF	Deren	1	1st
		S SOCKET LOTES APCI0107-P001A NGFF KEY M	LOTES		2nd
2	2280 SSD KEY M (NGFF M Key / h 5.5)(PCIE GEN4)	S SOCKET DEREN 5621D3-030H1B11R NGFF	Deren	1	1st
		S SOCKET LOTES APCI0706-P001A 67P NGFF	LOTES		2nd
3	WIFI KEY E (NGFF E Key / h 3.0)WIFI 6E (PCIE GEN4)	S SOCKET BELLWETHER 80152-3221 67P NGFF	Bellwether	1	1st
		S SOCKET LOTES APCI0128-P005A 67P M_PCI	LOTES		2nd
4	HDMI (Ch:3.8mm / H:6.6mm)2.1 FRL8 (8 GT/s)	CONN SDAN 602006-019101 19P HDMI2.1	SDAN	1	1st
		CONN LOTES AHDM0001-P003AC 19P HDMI2.1	LOTES		2nd
5	DisplayPort Full Size (Double layers,w/o flange) DP2.0 UHBR10 (10 GT/s)	CONN OCTECK DPP-40ABBDAB-U 40P DUAL_DP	OCTECK	1	1st
6	USB-C (w/o flange) USB4 (40Gbps), CH=3.4	S CONN LOTES AUSB0528-P503A USB TYPE C	LOTES	2	1st
7	5G RJ45 + USB 3.2 Gen2 (LED / H:11.6mm)5/10 Gbit Ethernet (PCIE GEN4)	CONN SINGATRON 2TJ3Y49-000111F 32P H31 RJ45+USB	Singatron	1	1st
		CONN OCTECK R13-DFCA800BDEG 32P H31 RJ45+USB	OCTECK		2nd
8	3.5mm combo (Ch:3.3mm / H:5.7mm)	CONN JIEDUN 3812910001 3.6D 6P AUDIO	JIEDUN	1	1st
		CONN YUQIU PJ519-F07M1BE-B 3.6D 6P AUDIO	YUQIU		2nd
9	FAN CONNECTOR 4 PIN (WTB V/T)	WAFER LOTES APHDA016-P002A00CC HEADER	LOTES	3	1st
10	FAN ARGB CONNECTOR 3 PIN (WTB V/T)	WAFER JIEDUN 5514410402 3P PIN HEADER	JIEDUN	1	1st
11	PSU DC 24 PIN	D-CONN BELLWETHER 70387-2468 24P H12.8 WTB P4.2	Bellwether	1	1st
		D-CONN OCTECK PHD-24CYBDAB-U 24P H12.8 WTB P4.2	OCTECK		2nd
12	PSU DC 8 PIN	D-CONN BELLWETHER 70387-0868 8P H12.8 WTB P4.2	Bellwether	1	1st
		D-CONN OCTECK PHD-08CYBDAB-U 8P H12.8 WTB P4.2	OCTECK		2nd
13	PWR PIN HEADER 9 PIN (WTB V/T)	WAFER JIEDUN 5514011005 9P PIN HEADER	JIEDUN	1	1st
14	AUDIO PIN HEADER 9 PIN (WTB V/T)	WAFER JIEDUN 5514011006 9P PIN HEADER	JIEDUN	1	1st
15	RTC CONN WTB	S W-CONN CVILUX CI4202M2HRJ-NH 2P P1.25	CVILUX	1	1st
16	PCIE Conn, 64 PIN GEN4	HOUSING DEREN 564ZD4-005H13012 64P H11.25 PCIE4.0 P1	Deren	1	1st
17	Clear CMOS Switch	S TACT SW SKRPABE010 SPST ALPS H2.5 4P	ALPS	1	NA
18	TYPE-E, 20PIN, VT	S W-CONN DEREN 40-42461-02001RHF-AS 20P H7.85 WTB P0.8	Deren	2	1st
Standoff (1)	STAND OFF (WLAN)	STANDOFF 1.4H 5.0D 2.0H 4D M2.0 C	Ronnie	1	1st
Standoff (2)	STAND OFF (SSD 4H)	STANDOFF 2.5H 5D 0.8H 3.0D M2.0 C	Ronnie	2	1st
Standoff (3)	STAND OFF (SSD 5H)	STANDOFF 0.65+3.85H 5.0D 0.8H 3.0D M2 C CH	Ronnie	2	1st
Standoff (4)	STAND OFF (RTC holder)	STANDOFF 2H 4D 0H 0D M2 E	Ronnie	2	1st
Standoff (5)	STAND OFF (Type C BRK)	STANDOFF 1.5H 4.5D 0.8H 3.0D M2 C	Ronnie	3	1st
Standoff (6)	STAND OFF (POWER)	STANDOFF 2.5H 5.5D 1.5H 3.8D M3.0 A	Ronnie	1	1st

framework

FRAMEWORK DESKTOP

MODEL

UNLESS SPECIFIED TOLERANCE ARE:
300 ABOVE : ± 0.20
300 ≥ X ≥ 150 : ± 0.15
150 > X ≥ 50 : ± 0.10
50 > X ≥ 20 : ± 0.075
20mm BELOW : ± 0.05
ANGLES : ± 1°
FLATNESS : ▱ 0.20
CONCENTRICITY : ± 0.05

THIRD ANGLE PROJECTION

DESIGNED BY	DRAWN BY
CHECKED BY	APPROVED BY
ISSUED DATE: Sep-02-24	SCALE: 1.000 / UNIT: mm
DRAWING FILE NAME: MAIN_PCB	
SIZE: A1 / SHEET: 1 OF 6	REVISION: 0 / VERSION: 0