


First set all ip addresses for the pcs as static and define their gateway



After configuring routers we can see that transmission is success.

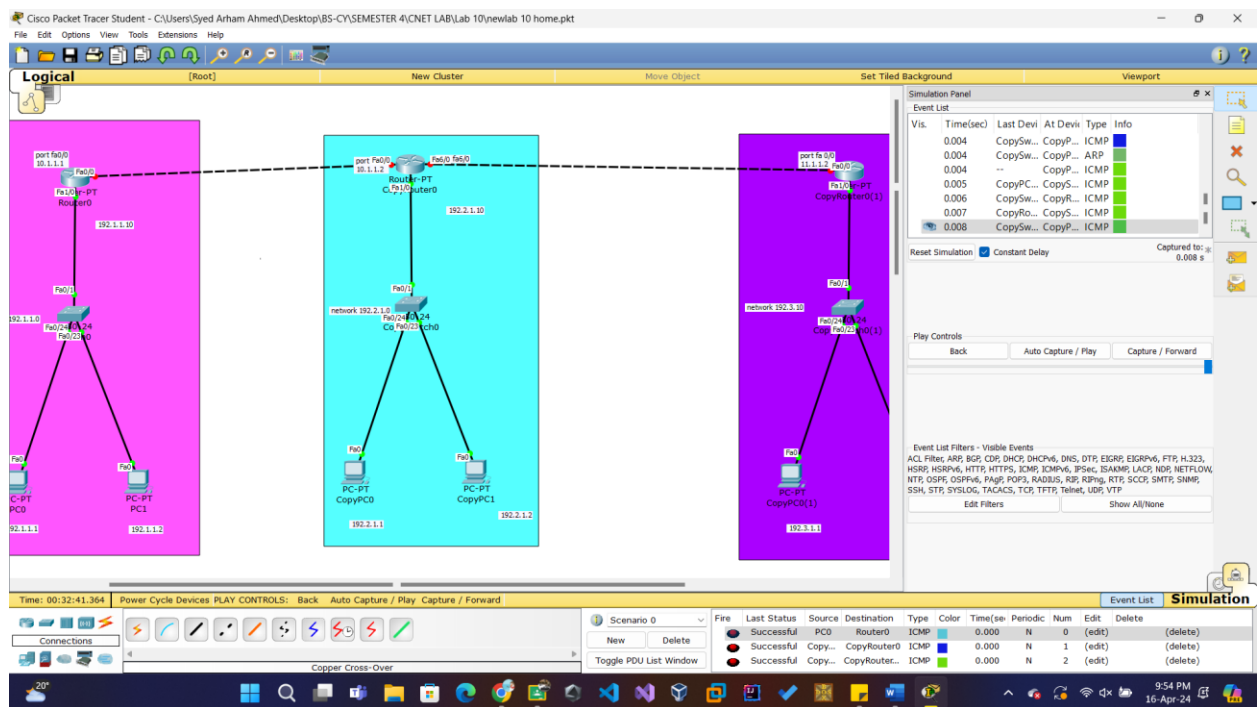