

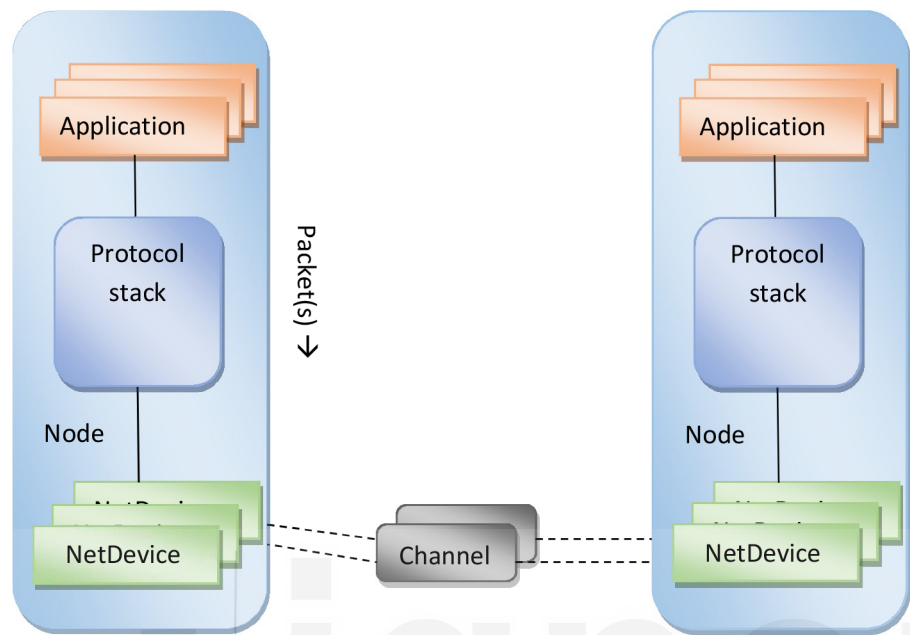


Figure 1: Basic data flow model in NS-3

1.8 LIST OF LAB ASSIGNMENTS – SESSION WISE

Let us try solving a different kind of a problem now. See the following given problems and try to implement these with the help of NS-3 simulator.

Session-1

1. Create a simple point to point network topology using two nodes.
2. Create a UdpClient and UdpServer nodes and communicate at a fixed data rate.

Session - 2

3. Measure the throughput (end to end) while varying latency in the network created in Session -1.
4. Create a simple network topology having two client node on left side and two server nodes on the right side. Both clients are connected with another node n1. Similarly, both server node connecting to node n2. Also connect node n1 and n2 thus forming a dumbbell shape topology. Use point to point link only.

Session - 3

5. Install a TCP socket instance connecting either of the client node with either of the server node in session 2's network topology.
6. Install a TCP socket instance connecting other remaining client node with the remaining server node in session 2's network topology.
7. Start TCP application and monitor the packet flow.

Session - 4

8. Take three nodes n1, n2 and n3 and create a wireless mobile ad-hoc network.
9. Install the optimized Link State Routing protocol on these nodes.

Session – 5

10. Create a UDP client on a node n1 and a UDP server on a node n2.
11. Send packets to node n2 from node n1 and plot the number of bytes received with respect to time at node n2.
12. Show the pcap traces at node n2's Wi-Fi interface.

Session – 6

13. Use 2 nodes to setup a wireless ad-hoc network where nodes are placed at a fixed distance in a 3D plane.
14. Install UDP server and Client at these two nodes.
15. Setup a CBR transmission between these nodes.

Session – 7

16. Setup 4 nodes, two TCP client and server pair and two UDP client and server pair.
17. Send packets to respective clients from both the servers.
18. Monitor the traffic for both the pair and plot the no. of bytes received.

Session – 8

19. Use the setup made in session 2 and monitor the traffic flow, plot the packets received.
20. Start the TCP application at Time 1 second.
21. After 20 seconds, start the UDP application at Rate1 which clogs the half of the dumbbell bridge capacity.
22. Using ns-3 tracing mechanism, plot the changes in the TCP window size over the time.

Session – 9

23. In the last session 8, Increase the UDP rate at 30 second to Rate2 such that it clogs whole of the dumbbell bridge capacity.
24. Use Matplotlib or GNUPlot to visualize cwnd vs time, also mention Rate1 and Rate2.

Session -10

25. Create a point to point network between two nodes with the following parameters.

Link bandwidth between the two nodes. Default is 5 Mbps.