


MATERIAL, FINISH, AND APPROX. WEIGHT DATA

CODE	MATERIAL	FINISH	APPROX. WEIGHT	
U	30% GLASS REINFORCED POLYETHERIMIDE (ULTEM 2300 OR EQUAL)	ABRASIVE CLEAN	.69 LB/100	
٧	40% GLASS REINFORCED POLYETHERIMIDE (ULTEM 2400 OR EQUAL)	ABRASIVE CLEAN	.73 LB/100	

INSTALLATION FIXTURE HOLDS MOUNT WHILE ADHESIVE CURES.

NOTE: FOR USE WITH INTERMEDIATE, STANDARD, LIGHT HEAVY, AND HEAVY CABLE TIE STRAPS

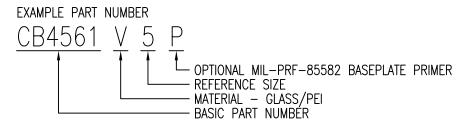

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES AND TOLERANCES ARE AS SHOWN BELOW. DIMENSIONAL TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1982.		PROPRIETARY PARTS SHOWN IN THIS DRAWING ARE THE SUBJECT OF ISSUED UNITED STATES AND FOREIGN PATENTS AND PATENTS PENDING. UNAUTHORIZED REPRODUCTION AND/OR DISTRIBUTION OF THIS DRAWING IS SPECIFICALLY PROHIBITED.					CARSON CITY NEVADA 89706			
		APPROVALS	DATE	TITLE						
ANGLES	±1°	DRAWN _DAC	310CT13	MOL	JNT, CABLE	TIE ANCH	HOR, TRANSVERSE,	INTERNAL	LY FIX	KTURED
.XX	±.03	CHECKED DO CANTEN	310CT13	SIZE	CAGE CODE	\cap	DWG. NO.			REV.
.XXX	±.010	RELEASED OB Cattle The	310CT13	I A	6653	U	[CB456 [3
.XXXX	±.001	REVISED DAC	310CT13	SCALE	2/1	310CT13		SHEET	1 °	F 1