


SIZE	FITTING PART NUMBER	ϕA	L	H_f
		± 0.125	± 0.250	± 0.250
2x2	TF-0215-STD	2.468	6.50	5.031
3x2	TF-0315-STD-02	3.548	8.25	5.687
3x3	TF-0315-STD	3.548	8.25	5.937
4x2	TF-0415-STD-02	4.562	10.75	6.468
4x3	TF-0415-STD-03	4.562	10.75	6.718
4x4	TF-0415-STD	4.562	10.75	7.468
6x2	TF-0615-STD-02	6.750	7.00	7.875
6x4	TF-0615-STD-04	6.750	14.00	8.500
6x6	TF-0615-STD	6.750	14.00	9.000
8x2	TF-0815-STD-02	8.750	8.25	9.062
8x4	TF-0815-STD-04	8.750	8.25	9.562
8x6	TF-0815-STD-06	8.750	16.50	10.062
8x8	TF-0815-STD	8.750	16.50	11.562
10x2	TF-1015-STD-02	10.875	10.00	10.125
10x4	TF-1015-STD-04	10.875	10.00	10.625
10x6	TF-1015-STD-06	10.875	20.00	11.125
10x8	TF-1015-STD-08	10.875	20.00	12.625
10x10	TF-1015-STD	10.875	20.00	12.625
12x2	TF-1215-STD-02	12.875	11.00	11.250
12x4	TF-1215-STD-04	12.875	11.00	11.750
12x6	TF-1215-STD-06	12.875	11.00	12.250
12x8	TF-1215-STD-08	12.875	22.00	13.750
12x10	TF-1215-STD-10	12.875	22.00	13.750
12x12	TF-1215-STD	12.875	22.00	14.250

NOTE: DIMENSIONS ARE TYPICAL AND SUBJECT TO CHANGE DEPENDING ON AVAILABILITY AT TIME OF ORDER

This drawing is the property of FURMANITE and is not to be used except as expressly authorized by this company. Copies are not to be made without permission.

SIZE	FITTING PART NUMBER	ϕA	L	H_f
		± 0.125	± 0.250	± 0.250
14x4	TF-1415-STD-04	14.125	13.00	12.375
14x6	TF-1415-STD-06	14.125	13.00	12.875
14x8	TF-1415-STD-08	14.125	26.00	14.375
14x10	TF-1415-STD-10	14.125	26.00	14.375
14x12	TF-1415-STD-12	14.125	26.00	14.875
14x14	TF-1415-STD	14.125	26.00	15.375
16x4	TF-1615-STD-04	16.125	15.00	13.375
16x6	TF-1615-STD-06	16.125	15.00	13.875
16x8	TF-1615-STD-08	16.125	15.00	15.375
16x10	TF-1615-STD-10	16.125	30.00	15.375
16x12	TF-1615-STD-12	16.125	30.00	15.875
16x14	TF-1615-STD-14	16.125	30.00	16.375
16x16	TF-1615-STD	16.125	30.00	16.375
18x4	TF-1815-STD-04	18.125	16.50	14.375
18x6	TF-1815-STD-06	18.125	16.50	14.875
18x8	TF-1815-STD-08	18.125	16.50	16.375
18x10	TF-1815-STD-10	18.125	33.00	16.375
18x12	TF-1815-STD-12	18.125	33.00	16.875
18x14	TF-1815-STD-14	18.125	33.00	17.375
18x16	TF-1815-STD-16	18.125	33.00	17.375
18x18	TF-1815-STD	18.125	33.00	17.875

DESIGN CODE: ANSI/ASME B31.4 & B31.8
DESIGN FACTOR: 0.72
DESIGN PRESSURE: 285 psig
DESIGN TEMP: 100 °F

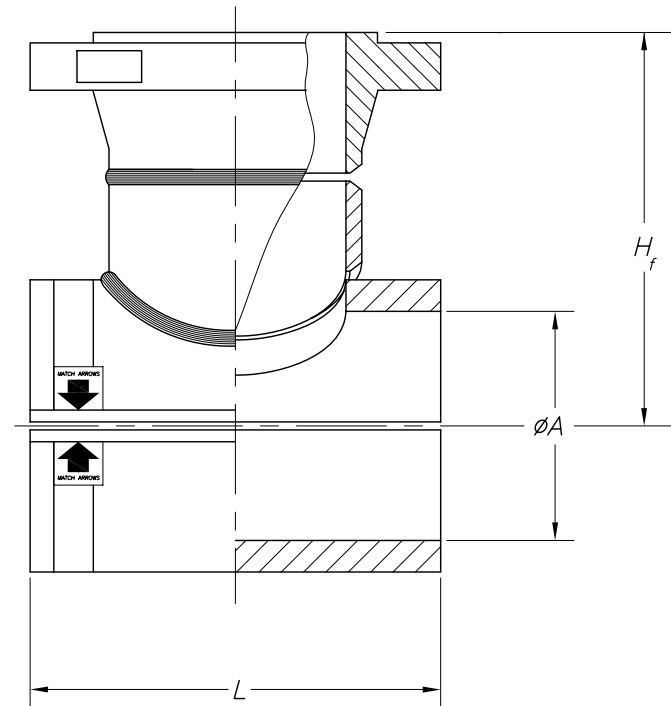

B			
ECN#	MARK	REVISION	DATE
FURMANITE		GENERAL FINISH 125 ✓	DATE: 07OCT93
		TOLERANCE UNLESS OTHERWISE SPECIFIED	SCALE: NONE
		1 PLC DEC ± 0.031	DRAWN BY: S.C.Sendelbach
		2 PLC DEC ± 0.015	APPROVED BY:
		3 PLC DEC ± 0.005	DRAWING NUMBER: SD-0000-2907
TITLE: GENERAL DIMENSIONS 2" THRU 18"-150# SPLIT TEES		MATERIAL: QTY. REQUIRED:	


SIZE	FITTING PART NUMBER	ϕA	L	H_f
		± 0.125	± 0.250	± 0.250
2x2	TF-0230-STD	2.468	6.50	5.375
3x2	TF-0330-STD-02	3.548	8.25	5.937
3x3	TF-0330-STD	3.548	8.25	6.312
4x2	TF-0430-STD-02	4.562	10.75	6.718
4x3	TF-0430-STD-03	4.562	10.75	7.093
4x4	TF-0430-STD	4.562	10.75	7.843
6x2	TF-0630-STD-02	6.750	7.00	8.250
6x4	TF-0660-STD-04	6.750	14.00	8.875
6x6	TF-0630-STD	6.750	14.00	9.375
8x2	TF-0830-STD-02	8.750	8.25	9.312
8x4	TF-0830-STD-04	8.750	8.25	9.937
8x6	TF-0830-STD-06	8.750	16.50	10.437
8x8	TF-0830-STD	8.750	16.50	11.937
10x2	TF-1030-STD-02	10.875	10.00	10.375
10x4	TF-1030-STD-04	10.875	10.00	11.000
10x6	TF-1030-STD-06	10.875	20.00	11.500
10x8	TF-1030-STD-08	10.875	20.00	13.000
10x10	TF-1030-STD	10.875	20.00	13.250
12x2	TF-1230-STD-02	12.875	11.00	11.500
12x4	TF-1230-STD-04	12.875	11.00	12.125
12x6	TF-1230-STD-06	12.875	11.00	12.625
12x8	TF-1230-STD-08	12.875	22.00	14.125
12x10	TF-1230-STD-10	12.875	22.00	14.375
12x12	TF-1230-STD	12.875	22.00	14.875

NOTE: DIMENSIONS ARE TYPICAL AND SUBJECT TO CHANGE DEPENDING ON AVAILABILITY AT TIME OF ORDER

This drawing is the property of FURMANITE and is not to be used except as expressly authorized by this company. Copies are not to be made without permission.

SIZE	FITTING PART NUMBER	ϕA	L	H_f
		± 0.125	± 0.250	± 0.250
14x4	TF-1430-STD-04	14.125	13.00	12.750
14x6	TF-1430-STD-06	14.125	13.00	13.250
14x8	TF-1430-STD-08	14.125	26.00	14.750
14x10	TF-1430-STD-10	14.125	26.00	15.000
14x12	TF-1460-STD-12	14.125	26.00	15.500
14x14	TF-1430-STD	14.125	26.00	16.000
16x4	TF-1630-STD-04	16.125	15.00	13.750
16x6	TF-1630-STD-06	16.125	15.00	14.250
16x8	TF-1630-STD-08	16.125	15.00	15.750
16x10	TF-1630-STD-10	16.125	30.00	16.000
16x12	TF-1660-STD-12	16.125	30.00	16.500
16x14	TF-1630-STD-14	16.125	30.00	17.000
16x16	TF-1630-STD	16.125	30.00	17.125
18x4	TF-1860-STD-04	18.125	16.50	14.750
18x6	TF-1830-STD-06	18.125	16.50	15.250
18x8	TF-1830-STD-08	18.125	16.50	16.750
18x10	TF-1860-STD-10	18.125	33.00	17.000
18x12	TF-1830-STD-12	18.125	33.00	17.500
18x14	TF-1830-STD-14	18.125	33.00	18.000
18x16	TF-1830-STD-16	18.125	33.00	18.125
18x18	TF-1860-STD	18.125	33.00	18.625

DESIGN CODE: ANSI/ASME B31.4 & B31.8
DESIGN FACTOR: 0.72
DESIGN PRESSURE: 740 psig
DESIGN TEMP: 100 °F

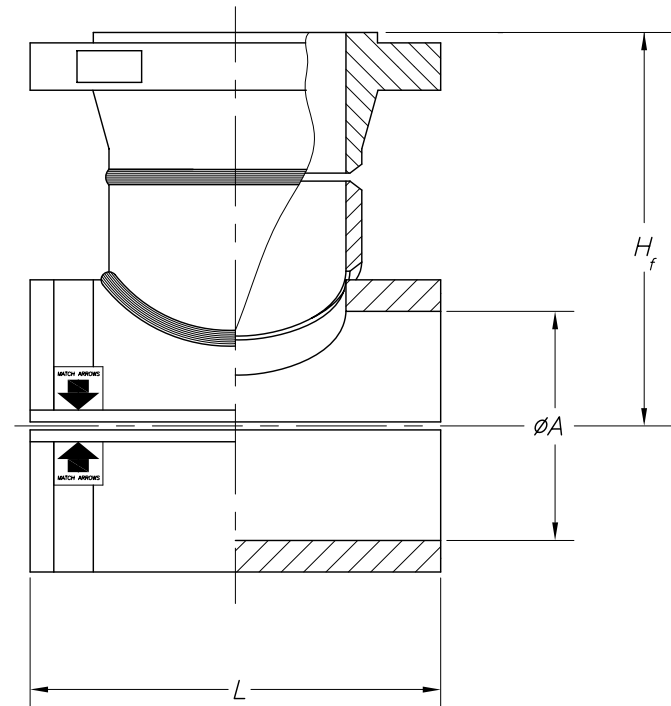

B			
ECN#	MARK	REVISION	DATE
		GENERAL FINISH 125✓	DATE: 07OCT93
		TOLERANCE UNLESS OTHERWISE SPECIFIED	SCALE: NONE
		1 PLC DEC ± 0.031	DRAWN BY: S.C.Sendelbach
		2 PLC DEC ± 0.015	APPROVED BY:
		3 PLC DEC ± 0.005	DRAWING NUMBER: SD-0000-2908
TITLE: GENERAL DIMENSIONS 2" THRU 18"-300# SPLIT TEES		MATERIAL: QTY. REQUIRED: 	


SIZE	FITTING PART NUMBER	ϕA	L	H_f
		± 0.125	± 0.250	± 0.250
2x2	TF-0260-STD	2.468	6.50	5.500
3x2	TF-0360-STD-02	3.548	8.25	6.062
3x3	TF-0360-STD	3.548	8.25	6.437
4x2	TF-0460-STD-02	4.562	10.75	6.843
4x3	TF-0460-STD-03	4.562	10.75	7.218
4x4	TF-0460-STD	4.562	10.75	8.718
6x2	TF-0660-STD-02	6.750	7.00	8.625
6x4	TF-0660-STD-04	6.750	14.00	9.75
6x6	TF-0660-STD	6.750	14.00	10.375
8x2	TF-0860-STD-02	8.750	8.25	9.687
8x4	TF-0860-STD-04	8.750	8.25	10.812
8x6	TF-0860-STD-06	8.750	16.50	11.437
8x8	TF-0860-STD	8.750	16.50	13.062
10x2	TF-1060-STD-02	10.875	10.00	10.75
10x4	TF-1060-STD-04	10.875	10.00	11.875
10x6	TF-1060-STD-06	10.875	20.00	12.500
10x8	TF-1060-STD-08	10.875	20.00	14.125
10x10	TF-1060-STD	10.875	20.00	14.875
12x2	TF-1260-STD-02	12.875	11.00	11.875
12x4	TF-1260-STD-04	12.875	11.00	13.000
12x6	TF-1260-STD-06	12.875	11.00	13.625
12x8	TF-1260-STD-08	12.875	22.00	15.250
12x10	TF-1260-STD-10	12.875	22.00	16.000
12x12	TF-1260-STD	12.875	22.00	16.125

NOTE: DIMENSIONS ARE TYPICAL AND SUBJECT TO CHANGE DEPENDING ON AVAILABILITY AT TIME OF ORDER

This drawing is the property of FURMANITE and is not to be used except as expressly authorized by this company. Copies are not to be made without permission.

SIZE	FITTING PART NUMBER	ϕA	L	H_f
		± 0.125	± 0.250	± 0.250
14x4	TF-1460-STD-04	14.125	13.00	13.625
14x6	TF-1460-STD-06	14.125	13.00	14.250
14x8	TF-1460-STD-08	14.125	26.00	15.875
14x10	TF-1460-STD-10	14.125	26.00	16.625
14x12	TF-1460-STD-12	14.125	26.00	16.750
14x14	TF-1460-STD	14.125	26.00	17.125
16x4	TF-1660-STD-04	16.125	15.00	14.750
16x6	TF-1660-STD-06	16.125	15.00	15.375
16x8	TF-1660-STD-08	16.125	15.00	17.000
16x10	TF-1660-STD-10	16.125	30.00	17.750
16x12	TF-1660-STD-12	16.125	30.00	17.875
16x14	TF-1660-STD-14	16.125	30.00	18.250
16x16	TF-1660-STD	16.125	30.00	18.750
18x4	TF-1860-STD-04	18.125	16.50	15.875
18x6	TF-1860-STD-06	18.125	16.50	16.500
18x8	TF-1860-STD-08	18.125	16.50	18.125
18x10	TF-1860-STD-10	18.125	33.00	18.875
18x12	TF-1860-STD-12	18.125	33.00	19.000
18x14	TF-1860-STD-14	18.125	33.00	19.375
18x16	TF-1860-STD-16	18.125	33.00	19.875
18x18	TF-1860-STD	18.125	33.00	20.125

DESIGN CODE: ANSI/ASME B31.4 & B31.8
DESIGN FACTOR: 0.72
DESIGN PRESSURE: 1480 psig
DESIGN TEMP: 100 °F

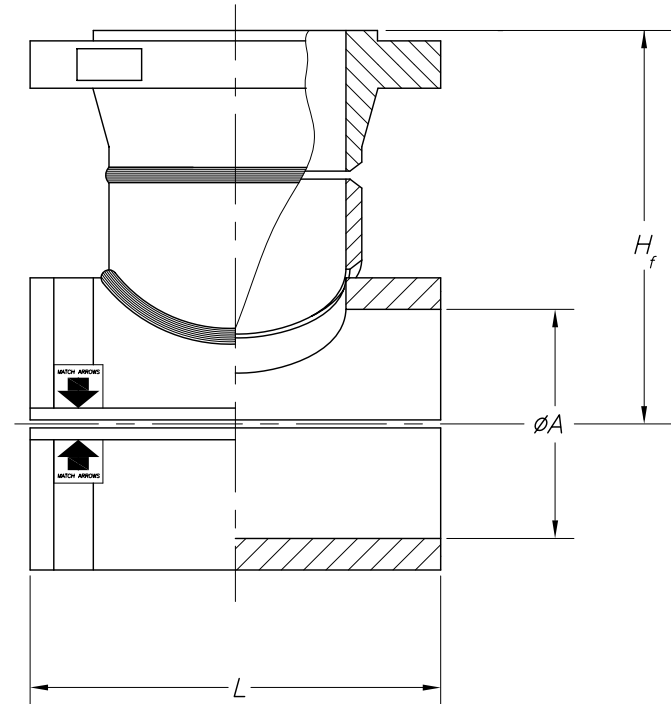


B			
ECN#	MARK	REVISION	DATE
FURMANITE		GENERAL FINISH 125 ✓	DATE: 07OCT93
		TOLERANCE UNLESS OTHERWISE SPECIFIED	SCALE: NONE
		1 PLC DEC ± 0.031 2 PLC DEC ± 0.015 3 PLC DEC ± 0.005	DRAWN BY: S.C.Sendelbach
		FRACTION $\pm 1/4$ ANGULAR $\pm 1^\circ$	APPROVED BY:
TITLE: GENERAL DIMENSIONS 2" THRU 18"-600# SPLIT TEES		DRAWING NUMBER: SD-0000-2909	

SIZE	FITTING PART NUMBER	ϕA	L	H_f
		± 0.125	± 0.250	± 0.250
20x4	TF-2015-STD-04	20.125	18.00	15.375
20x6	TF-2015-STD-06	20.125	18.00	15.875
20x8	TF-2015-STD-08	20.125	18.00	17.375
20x10	TF-2015-STD-10	20.125	18.00	17.375
20x12	TF-2015-STD-12	20.125	36.00	17.875
20x14	TF-2015-STD-14	20.125	36.00	18.375
20x16	TF-2015-STD-16	20.125	36.00	18.375
20x18	TF-2015-STD-18	20.125	36.00	18.875
20x20	TF-2015-STD	20.125	36.00	19.062
22x4	TF-2215-STD-04	22.125	10.00	16.375
22x6	TF-2215-STD-06	22.125	20.00	16.875
22x8	TF-2215-STD-08	22.125	20.00	18.375
22x10	TF-2215-STD-10	22.125	20.00	18.375
22x12	TF-2215-STD-12	22.125	40.00	18.875
22x14	TF-2215-STD-14	22.125	40.00	19.375
22x16	TF-2215-STD-16	22.125	40.00	19.375
22x18	TF-2215-STD-18	22.125	40.00	19.875
22x20	TF-2215-STD-20	22.125	40.00	20.062
22x22	TF-2215-STD	22.125	40.00	20.500
24x4	TF-2415-STD-04	24.125	10.75	17.375
24x6	TF-2415-STD-06	24.125	21.50	17.875
24x8	TF-2415-STD-08	24.125	21.50	19.375
24x10	TF-2415-STD-10	24.125	21.50	19.375
24x12	TF-2415-STD-12	24.125	21.50	19.875

SIZE	FITTING PART NUMBER	ϕA	L	H_f
		± 0.125	± 0.250	± 0.250
24x14	TF-2415-STD-14	24.125	43.00	20.375
24x16	TF-2415-STD-16	24.125	43.00	20.375
24x18	TF-2415-STD-16	24.125	43.00	20.875
24x20	TF-2415-STD-20	24.125	43.00	21.062
24x22	TF-2415-STD-22	24.125	43.00	21.500
24x24	TF-2415-STD	24.125	43.00	21.625
26x4	TF-2615-STD-04	26.125	11.75	18.375
26x6	TF-2615-STD-06	26.125	23.50	18.875
26x8	TF-2615-STD-08	26.125	23.50	20.375
26x10	TF-2615-STD-10	26.125	23.50	20.375
26x12	TF-2615-STD-12	26.125	23.50	20.875
26x14	TF-2615-STD-14	26.125	47.00	21.375
26x16	TF-2615-STD-16	26.125	47.00	21.375
26x18	TF-2615-STD-18	26.125	47.00	21.875
26x20	TF-2615-STD-20	26.125	47.00	22.062
26x22	TF-2615-STD-22	26.125	47.00	22.500
26x24	TF-2615-STD-24	26.125	47.00	22.625
26x26	TF-2615-STD	26.125	47.00	21.375

DESIGN CODE: ANSI/ASME B31.4 & B31.8
DESIGN FACTOR: 0.72
DESIGN PRESSURE: 285 psig
DESIGN TEMP: 100 °F

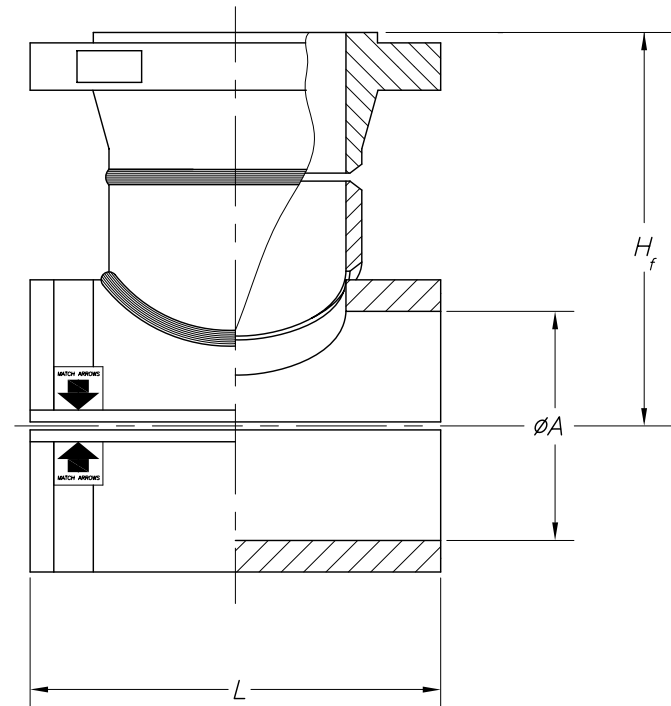

NOTE: DIMENSIONS ARE TYPICAL AND SUBJECT TO CHANGE DEPENDING ON AVAILABILITY AT TIME OF ORDER


This drawing is the property of FURMANITE and is not to be used except as expressly authorized by this company. Copies are not to be made without permission.

ECN#	MARK	REVISION		BY	DATE
FURMANITE		GENERAL FINISH 125 ✓		DATE: 07OCT93	
		TOLERANCE UNLESS OTHERWISE SPECIFIED		SCALE: NONE	
		1 PLC DEC ± 0.031		QTY. REQUIRED:	
		2 PLC DEC ± 0.015		DRAWN BY:	
TITLE:		3 PLC DEC ± 0.005		APPROVED BY:	
GENERAL DIMENSIONS 20" THRU 26"-150# SPLIT TEES		FRACTION $\pm 1/4$		DRAWING NUMBER:	
		ANGULAR $\pm 1^\circ$		SD-0000-2910	

SIZE	FITTING PART NUMBER	ϕA	L	H_f
		± 0.125	± 0.250	± 0.250
20x4	TF-2030-STD-04	20.125	18.00	15.750
20x6	TF-2030-STD-06	20.125	18.00	16.250
20x8	TF-2030-STD-08	20.125	18.00	17.750
20x10	TF-2030-STD-10	20.125	18.00	18.000
20x12	TF-2030-STD-12	20.125	36.00	18.500
20x14	TF-2030-STD-14	20.125	36.00	19.000
20x16	TF-2030-STD-16	20.125	36.00	19.125
20x18	TF-2030-STD-18	20.125	36.00	19.625
20x20	TF-2030-STD	20.125	36.00	19.750
22x4	TF-2230-STD-04	22.125	10.00	16.875
22x6	TF-2230-STD-06	22.125	20.00	17.375
22x8	TF-2230-STD-08	22.125	20.00	18.875
22x10	TF-2230-STD-10	22.125	20.00	19.125
22x12	TF-2230-STD-12	22.125	40.00	19.625
22x14	TF-2230-STD-14	22.125	40.00	20.125
22x16	TF-2230-STD-16	22.125	40.00	20.250
22x18	TF-2230-STD-18	22.125	40.00	20.750
22x20	TF-2230-STD-20	22.125	40.00	20.875
22x22	TF-2230-STD	22.125	40.00	21.250
24x4	TF-2430-STD-04	24.125	10.75	17.875
24x6	TF-2430-STD-06	24.125	21.50	18.375
24x8	TF-2430-STD-08	24.125	21.50	19.875
24x10	TF-2430-STD-10	24.125	21.50	20.125
24x12	TF-2430-STD-12	24.125	21.50	20.625

SIZE	FITTING PART NUMBER	ϕA	L	H_f
		± 0.125	± 0.250	± 0.250
24x14	TF-2430-STD-14	24.125	43.00	21.125
24x16	TF-2430-STD-16	24.125	43.00	21.250
24x18	TF-2430-STD-18	24.125	43.00	21.750
24x20	TF-2430-STD-20	24.125	43.00	21.875
24x22	TF-2430-STD-22	24.125	43.00	22.250
24x24	TF-2430-STD	24.125	43.00	22.375
26x4	TF-2630-STD-04	26.125	11.75	19.000
26x6	TF-2630-STD-06	26.125	23.50	19.500
26x8	TF-2630-STD-08	26.125	23.50	21.000
26x10	TF-2630-STD-10	26.125	23.50	21.250
26x12	TF-2630-STD-12	26.125	23.50	21.750
26x14	TF-2630-STD-14	26.125	47.00	22.250
26x16	TF-2630-STD-16	26.125	47.00	22.375
26x18	TF-2630-STD-18	26.125	47.00	22.875
26x20	TF-2630-STD-20	26.125	47.00	23.000
26x22	TF-2630-STD-22	26.125	47.00	23.375
26x24	TF-2630-STD-24	26.125	47.00	23.500
26x26	TF-2630-STD	26.125	47.00	24.125

DESIGN CODE: ANSI/ASME B31.4 & B31.8
 DESIGN FACTOR: 0.72
 DESIGN PRESSURE: 740 psig
 DESIGN TEMP: 100 °F

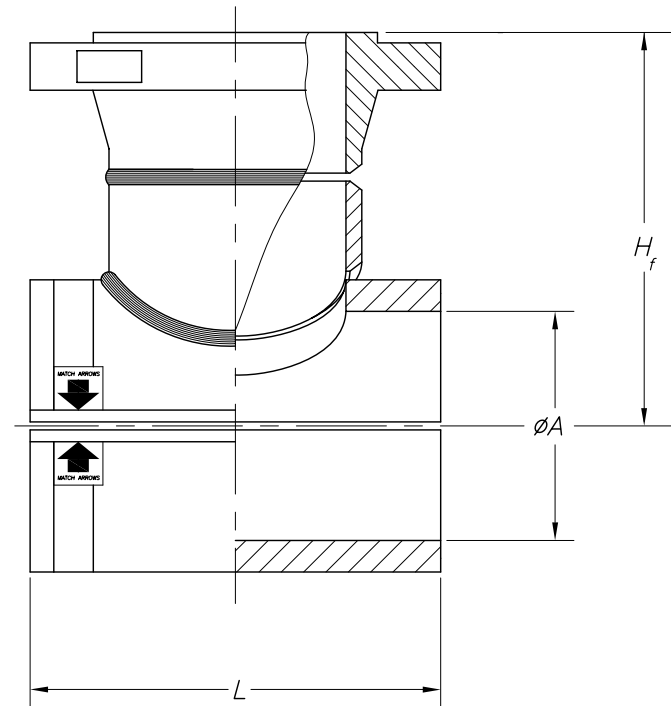

NOTE: DIMENSIONS ARE TYPICAL AND SUBJECT TO CHANGE DEPENDING ON AVAILABILITY AT TIME OF ORDER


This drawing is the property of FURMANITE and is not to be used except as expressly authorized by this company. Copies are not to be made without permission.

B			
ECN#	MARK	REVISION	DATE
FURMANITE		GENERAL FINISH 125 ✓	DATE: 07OCT93
		TOLERANCE UNLESS OTHERWISE SPECIFIED	SCALE: NONE
		1 PLC DEC ± 0.031 2 PLC DEC ± 0.015 3 PLC DEC ± 0.005 FRACTION $\pm 1/4$ ANGULAR $\pm 1'$	DRAWN BY: S.C.Sendelbach
		TITLE: GENERAL DIMENSIONS 20" THRU 26"-300# SPLIT TEES	
		MATERIAL: QTY. REQUIRED: APPROVED BY:	
		DRAWING NUMBER: SD-0000-2911	

SIZE	FITTING PART NUMBER	ϕA	L	H_f
		± 0.125	± 0.250	± 0.250
20x4	TF-2060-STD-04	20.125	18.00	17.000
20x6	TF-2060-STD-06	20.125	18.00	17.625
20x8	TF-2060-STD-08	20.125	18.00	19.250
20x10	TF-2060-STD-10	20.125	36.00	20.000
20x12	TF-2060-STD-12	20.125	36.00	20.125
20x14	TF-2060-STD-14	20.125	36.00	20.500
20x16	TF-2060-STD-16	20.125	36.00	21.000
20x18	TF-2060-STD-18	20.125	36.00	21.250
20x20	TF-2060-STD	20.125	36.00	21.500
22x4	TF-2260-STD-04	22.125	20.00	18.125
22x6	TF-2260-STD-06	22.125	20.00	18.750
22x8	TF-2260-STD-08	22.125	20.00	20.375
22x10	TF-2260-STD-10	22.125	20.00	21.125
22x12	TF-2260-STD-12	22.125	40.00	21.250
22x14	TF-2260-STD-14	22.125	40.00	21.625
22x16	TF-2260-STD-16	22.125	40.00	22.125
22x18	TF-2260-STD-18	22.125	40.00	22.375
22x20	TF-2260-STD-20	22.125	40.00	22.625
22x22	TF-2260-STD	22.125	40.00	23.125
24x4	TF-2460-STD-04	24.125	21.50	19.250
24x6	TF-2460-STD-06	24.125	21.50	19.875
24x8	TF-2460-STD-08	24.125	21.50	21.500
24x10	TF-2460-STD-10	24.125	21.50	22.250
24x12	TF-2460-STD-12	24.125	21.50	22.375

SIZE	FITTING PART NUMBER	ϕA	L	H_f
		± 0.125	± 0.250	± 0.250
24x14	TF-2460-STD-14	24.125	43.00	22.750
24x16	TF-2460-STD-16	24.125	43.00	23.250
24x18	TF-2460-STD-18	24.125	43.00	23.500
24x20	TF-2460-STD-20	24.125	43.00	23.750
24x22	TF-2460-STD-22	24.125	43.00	24.250
24x24	TF-2460-STD	24.125	43.00	24.500
26x4	TF-2660-STD-04	26.125	10.75	20.250
26x6	TF-2660-STD-06	26.125	23.50	20.875
26x8	TF-2660-STD-08	26.125	23.50	22.500
26x10	TF-2660-STD-10	26.125	23.50	23.250
26x12	TF-2660-STD-12	26.125	23.50	23.375
26x14	TF-2660-STD-14	26.125	47.00	23.750
26x16	TF-2660-STD-16	26.125	47.00	24.250
26x18	TF-2660-STD-18	26.125	47.00	24.500
26x20	TF-2660-STD-20	26.125	47.00	24.750
26x22	TF-2660-STD-22	26.125	47.00	25.250
26x24	TF-2660-STD-24	26.125	47.00	25.500
26x26	TF-2660-STD	26.125	47.00	26.250

DESIGN CODE: ANSI/ASME B31.4 & B31.8
 DESIGN FACTOR: 0.72
 DESIGN PRESSURE: 1480 psig
 DESIGN TEMP: 100 °F

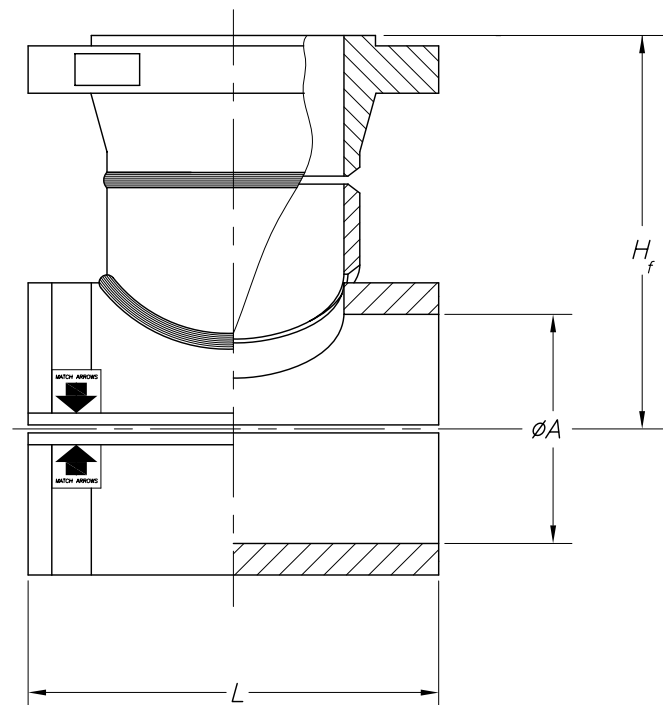

NOTE: DIMENSIONS ARE TYPICAL AND SUBJECT TO CHANGE DEPENDING ON AVAILABILITY AT TIME OF ORDER


This drawing is the property of FURMANITE and is not to be used except as expressly authorized by this company. Copies are not to be made without permission.

B					
ECN#	MARK	REVISION		BY	DATE
FURMANITE		GENERAL FINISH 125✓		DATE: 07OCT93	
		TOLERANCE UNLESS OTHERWISE SPECIFIED		SCALE: NONE	
		1 PLC DEC ± 0.031		DRAWN BY: S.C.Sendelbach	
		2 PLC DEC ± 0.015		APPROVED BY:	
TITLE: GENERAL DIMENSIONS 20" THRU 26"-600# SPLIT TEES		3 PLC DEC ± 0.005		DRAWING NUMBER: SD-0000-2912	
		FRACTION $\pm 1/4$			
		ANGULAR $\pm 1^\circ$			

SIZE	FITTING PART NUMBER	ϕA	L	H_f
		± 0.125	± 0.250	± 0.250
28x4	TF-2815-STD-04	28.125	12.25	19.500
28x6	TF-2815-STD-06	28.125	24.50	20.000
28x8	TF-2815-STD-08	28.125	24.50	21.500
28x10	TF-2815-STD-10	28.125	24.50	21.500
28x12	TF-2815-STD-12	28.125	24.50	22.000
28x14	TF-2815-STD-14	28.125	24.50	22.500
28x16	TF-2815-STD-16	28.125	49.00	22.500
28x18	TF-2815-STD-18	28.125	49.00	23.000
28x20	TF-2815-STD-20	28.125	49.00	23.187
28x22	TF-2815-STD-22	28.125	49.00	23.625
28x24	TF-2815-STD-24	28.125	49.00	23.750
28x26	TF-2815-STD-26	28.125	49.00	22.500
28x28	TF-2815-STD	28.125	49.00	22.687
30x4	TF-3015-STD-04	30.125	12.75	20.500
30x6	TF-3015-STD-06	30.125	25.50	21.000
30x8	TF-3015-STD-08	30.125	25.50	22.500
30x10	TF-3015-STD-10	30.125	25.50	22.500
30x12	TF-3015-STD-12	30.125	25.50	23.000
30x14	TF-3015-STD-14	30.125	25.50	23.500
30x16	TF-3015-STD-16	30.125	51.00	23.500
30x18	TF-3015-STD-18	30.125	51.00	24.000
30x20	TF-3015-STD-20	30.125	51.00	24.187
30x22	TF-3015-STD-22	30.125	51.00	24.625
30x24	TF-3015-STD-24	30.125	51.00	24.750

SIZE	FITTING PART NUMBER	ϕA	L	H_f
		± 0.125	± 0.250	± 0.250
30x26	TF-3015-STD-26	30.125	51.00	23.500
30x28	TF-3015-STD-28	30.125	51.00	23.687
30x30	TF-3015-STD	30.125	51.00	24.375
32x4	TF-3215-STD-04	32.125	13.75	21.500
32x6	TF-3215-STD-06	32.125	13.75	22.000
32x8	TF-3215-STD-08	32.125	27.50	23.500
32x10	TF-3215-STD-10	32.125	27.50	23.500
32x12	TF-3215-STD-12	32.125	27.50	24.000
32x14	TF-3215-STD-14	32.125	27.50	24.500
32x16	TF-3215-STD-16	32.125	27.50	24.500
32x18	TF-3215-STD-18	32.125	55.00	25.000
32x20	TF-3215-STD-20	32.125	55.00	25.187
32x22	TF-3215-STD-22	32.125	55.00	25.625
32x24	TF-3215-STD-24	32.125	55.00	25.750
32x26	TF-3215-STD-26	32.125	55.00	24.500
32x28	TF-3215-STD-28	32.125	55.00	25.687
32x30	TF-3215-STD-30	32.125	55.00	25.375
32x32	TF-3215-STD	32.125	55.00	25.687

DESIGN CODE: ANSI/ASME B31.4 & B31.8
 DESIGN FACTOR: 0.72
 DESIGN PRESSURE: 285 psig
 DESIGN TEMP: 100 °F

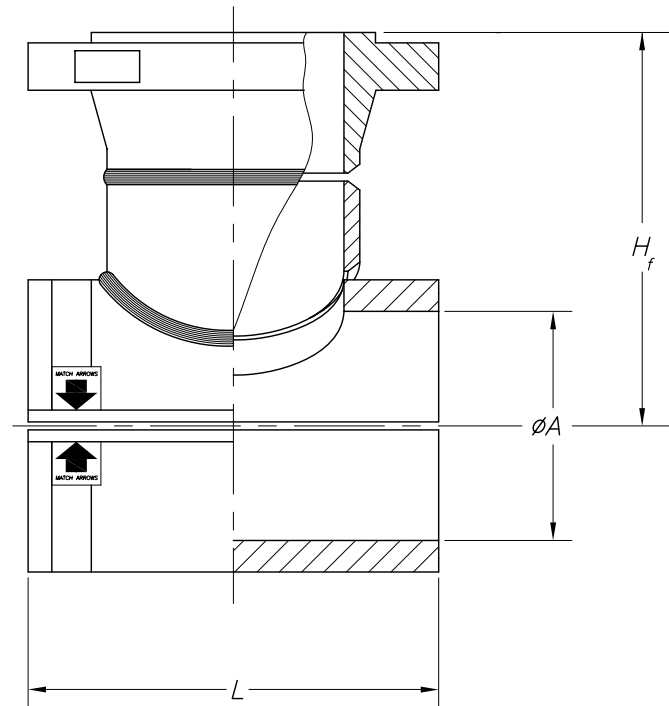

NOTE: DIMENSIONS ARE TYPICAL AND SUBJECT TO CHANGE DEPENDING ON AVAILABILITY AT TIME OF ORDER


This drawing is the property of FURMANITE and is not to be used except as expressly authorized by this company. Copies are not to be made without permission.

ECN#	MARK	REVISION		BY	DATE
FURMANITE		GENERAL FINISH 125 ✓		DATE: 07OCT93	
		TOLERANCE UNLESS OTHERWISE SPECIFIED		SCALE: NONE	
		1 PLC DEC ± 0.031		DRAWN BY: S.C.Sendelbach	
		2 PLC DEC ± 0.015		APPROVED BY:	
TITLE:		3 PLC DEC ± 0.005		DRAWING NUMBER:	
GENERAL DIMENSIONS 28" THRU 32"-150# SPLIT TEES		FRACTION $\pm 1/4$		SD-0000-2913	
		ANGULAR $\pm 1^\circ$			

SIZE	FITTING PART NUMBER	ϕA	L	H_f
		± 0.125	± 0.250	± 0.250
28x4	TF-2830-STD-04	28.125	12.25	20.125
28x6	TF-2830-STD-06	28.125	24.50	20.625
28x8	TF-2830-STD-08	28.125	24.50	22.125
28x10	TF-2830-STD-10	28.125	24.50	22.375
28x12	TF-2830-STD-12	28.125	24.50	22.875
28x14	TF-2830-STD-14	28.125	24.50	23.375
28x16	TF-2830-STD-16	28.125	49.00	23.500
28x18	TF-2830-STD-18	28.125	49.00	24.000
28x20	TF-2830-STD-20	28.125	49.00	24.125
28x22	TF-2830-STD-22	28.125	49.00	24.500
28x24	TF-2830-STD-24	28.125	49.00	24.625
28x26	TF-2830-STD-26	28.125	49.00	25.250
28x28	TF-2830-STD	28.125	49.00	25.750
30x4	TF-3030-STD-04	30.125	12.75	21.125
30x6	TF-3030-STD-06	30.125	25.50	21.625
30x8	TF-3030-STD-08	30.125	25.50	23.125
30x10	TF-3030-STD-10	30.125	25.50	23.375
30x12	TF-3030-STD-12	30.125	25.50	23.875
30x14	TF-3030-STD-14	30.125	25.50	24.375
30x16	TF-3030-STD-16	30.125	51.00	24.500
30x18	TF-3030-STD-18	30.125	51.00	25.000
30x20	TF-3030-STD-20	30.125	51.00	25.125
30x22	TF-3030-STD-22	30.125	51.00	25.500
30x24	TF-3030-STD-24	30.125	51.00	25.625

SIZE	FITTING PART NUMBER	ϕA	L	H_f
		± 0.125	± 0.250	± 0.250
30x26	TF-3030-STD-26	30.125	51.00	26.250
30x28	TF-3030-STD-28	30.125	51.00	26.750
30x30	TF-3030-STD	30.125	51.00	27.500
32x4	TF-3230-STD-04	32.125	13.75	22.250
32x6	TF-3230-STD-06	32.125	13.75	22.875
32x8	TF-3230-STD-08	32.125	27.50	24.250
32x10	TF-3230-STD-10	32.125	27.50	24.500
32x12	TF-3230-STD-12	32.125	27.50	25.000
32x14	TF-3230-STD-14	32.125	27.50	25.500
32x16	TF-3230-STD-16	32.125	27.50	25.625
32x18	TF-3230-STD-18	32.125	55.00	26.125
32x20	TF-3230-STD-20	32.125	55.00	26.250
32x22	TF-3230-STD-22	32.125	55.00	26.625
32x24	TF-3230-STD-24	32.125	55.00	26.875
32x26	TF-3230-STD-26	32.125	55.00	27.375
32x28	TF-3230-STD-28	32.125	55.00	27.875
32x30	TF-3230-STD-30	32.125	55.00	28.625
32x32	TF-3230-STD	32.125	55.00	29.125

DESIGN CODE: ANSI/ASME B31.4 & B31.8
 DESIGN FACTOR: 0.72
 DESIGN PRESSURE: 740 psig
 DESIGN TEMP: 100 °F

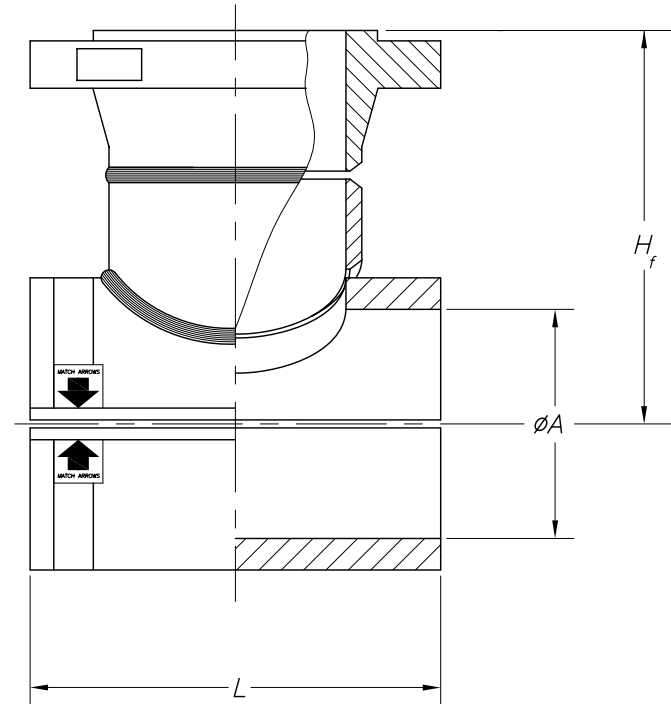

NOTE: DIMENSIONS ARE TYPICAL AND SUBJECT TO CHANGE DEPENDING ON AVAILABILITY AT TIME OF ORDER

This drawing is the property of FURMANITE and is not to be used except as expressly authorized by this company. Copies are not to be made without permission.


ECN#	MARK	REVISION		BY	DATE
FURMANITE		GENERAL FINISH 125 ✓	DATE: 07OCT93	MATERIAL:	
		TOLERANCE UNLESS OTHERWISE SPECIFIED	SCALE: NONE	QTY. REQUIRED:	
		1 PLC DEC ± 0.031 2 PLC DEC ± 0.015 3 PLC DEC ± 0.005	DRAWN BY: S.C.Sendelbach	APPROVED BY:	
		FRACTION $\pm 1/4$ ANGULAR $\pm 1'$	DRAWING NUMBER: SD-0000-2914		

TITLE:
 GENERAL DIMENSIONS
 28" THRU 32"-300#
 SPLIT TEES

SIZE	FITTING PART NUMBER	ϕA	L	H_f
		± 0.125	± 0.250	± 0.250
28x4	TF-2860-STD-04	28.125	12.25	21.375
28x6	TF-2860-STD-06	28.125	24.50	22.000
28x8	TF-2860-STD-08	28.125	24.50	23.625
28x10	TF-2860-STD-10	28.125	24.50	24.375
28x12	TF-2860-STD-12	28.125	24.50	24.500
28x14	TF-2860-STD-14	28.125	24.50	24.875
28x16	TF-2860-STD-16	28.125	49.00	25.375
28x18	TF-2860-STD-18	28.125	49.00	25.625
28x20	TF-2860-STD-20	28.125	49.00	25.875
28x22	TF-2860-STD-22	28.125	49.00	26.375
28x24	TF-2860-STD-24	28.125	49.00	26.625
28x26	TF-2860-STD-26	28.125	49.00	27.375
28x28	TF-2860-STD	28.125	49.00	27.875
30x4	TF-3060-STD-04	30.125	12.75	22.625
30x6	TF-3060-STD-06	30.125	25.50	23.250
30x8	TF-3060-STD-08	30.125	25.50	24.875
30x10	TF-3060-STD-10	30.125	25.50	25.625
30x12	TF-3060-STD-12	30.125	25.50	25.750
30x14	TF-3060-STD-14	30.125	25.50	26.125
30x16	TF-3060-STD-16	30.125	51.00	26.625
30x18	TF-3060-STD-18	30.125	51.00	26.875
30x20	TF-3060-STD-20	30.125	51.00	27.125
30x22	TF-3060-STD-22	30.125	51.00	27.625
30x24	TF-3060-STD-24	30.125	51.00	27.875

SIZE	FITTING PART NUMBER	ϕA	L	H_f
		± 0.125	± 0.250	± 0.250
30x26	TF-3060-STD-26	30.125	51.00	28.625
30x28	TF-3060-STD-28	30.125	51.00	29.125
30x30	TF-3060-STD	30.125	51.00	29.875
32x4	TF-3260-STD-04	32.125	13.75	23.625
32x6	TF-3260-STD-06	32.125	13.75	24.250
32x8	TF-3260-STD-08	32.125	27.50	25.875
32x10	TF-3260-STD-10	32.125	27.50	26.625
32x12	TF-3260-STD-12	32.125	27.50	26.750
32x14	TF-3260-STD-14	32.125	27.50	27.125
32x16	TF-3260-STD-16	32.125	27.50	27.625
32x18	TF-3260-STD-18	32.125	55.00	27.875
32x20	TF-3260-STD-20	32.125	55.00	28.125
32x22	TF-3260-STD-22	32.125	55.00	28.625
32x24	TF-3260-STD-24	32.125	55.00	28.875
32x26	TF-3260-STD-26	32.125	55.00	29.625
32x28	TF-3260-STD-28	32.125	55.00	30.125
32x30	TF-3260-STD-30	32.125	55.00	30.875
32x32	TF-3260-STD	32.125	55.00	31.375

DESIGN CODE: ANSI/ASME B31.4 & B31.8
 DESIGN FACTOR: 0.72
 DESIGN PRESSURE: 1480 psig
 DESIGN TEMP: 100 °F

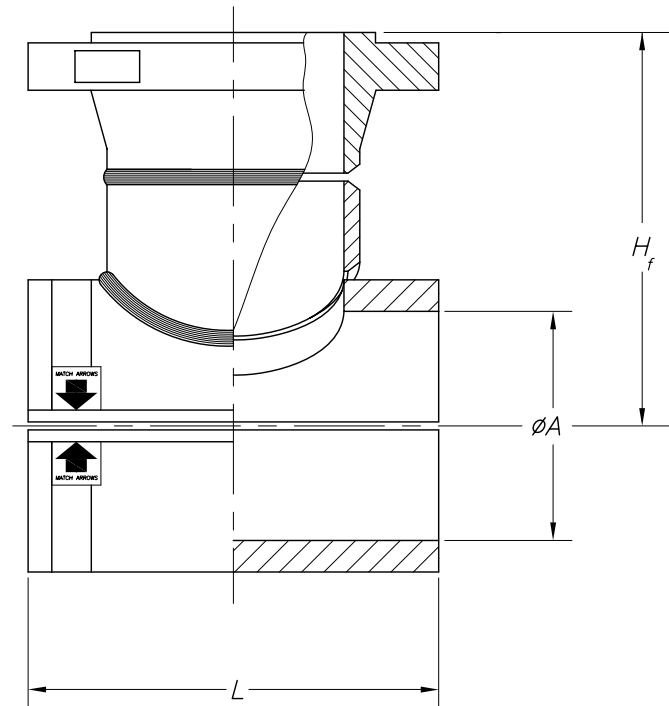

NOTE: DIMENSIONS ARE TYPICAL AND SUBJECT TO CHANGE DEPENDING ON AVAILABILITY AT TIME OF ORDER

This drawing is the property of FURMANITE and is not to be used except as expressly authorized by this company. Copies are not to be made without permission.

ECN#	MARK	REVISION		BY	DATE
FURMANITE		GENERAL FINISH 125 ✓		DATE: 07OCT93	
		TOLERANCE UNLESS OTHERWISE SPECIFIED		SCALE: NONE	
		1 PLC DEC ± 0.031		DRAWN BY: S.C.Sendelbach	
		2 PLC DEC ± 0.015		APPROVED BY:	
TITLE:		3 PLC DEC ± 0.005		DRAWING NUMBER:	
GENERAL DIMENSIONS 28" THRU 32"-600# SPLIT TEES		FRACTION $\pm 1/4$		SD-0000-2915	
		ANGULAR $\pm 1^\circ$			


SIZE	FITTING PART NUMBER	ϕA	L	H_f
		± 0.125	± 0.250	± 0.250
34x4	TF-3415-STD-04	34.125	14.25	22.500
34x6	TF-3415-STD-06	34.125	14.25	23.000
34x8	TF-3415-STD-08	34.125	28.50	24.500
34x10	TF-3415-STD-10	34.125	28.50	24.500
34x12	TF-3415-STD-12	34.125	28.50	25.000
34x14	TF-3415-STD-14	34.125	28.50	25.500
34x16	TF-3415-STD-16	34.125	28.50	25.500
34x18	TF-3415-STD-18	34.125	57.00	26.000
34x20	TF-3415-STD-20	34.125	57.00	26.187
34x22	TF-3415-STD-22	34.125	57.00	26.625
34x24	TF-3415-STD-24	34.125	57.00	26.750
34x26	TF-3415-STD-26	34.125	57.00	25.500
34x28	TF-3415-STD-28	34.125	57.00	25.687
34x30	TF-3415-STD-30	34.125	57.00	26.375
34x32	TF-3415-STD-32	34.125	57.00	26.687
34x34	TF-3415-STD	34.125	57.00	26.875
36x4	TF-3615-STD-04	36.125	15.25	23.500
36x6	TF-3615-STD-04	36.125	15.25	24.000
36x8	TF-3615-STD-06	36.125	15.25	25.500
36x10	TF-3615-STD-10	36.125	30.50	25.500
36x12	TF-3615-STD-12	36.125	30.50	26.000
36x14	TF-3615-STD-14	36.125	30.50	26.500
36x16	TF-3615-STD-16	36.125	30.50	26.500
36x18	TF-3615-STD-18	36.125	30.50	27.000

NOTE: DIMENSIONS ARE TYPICAL AND SUBJECT TO CHANGE DEPENDING ON AVAILABILITY AT TIME OF ORDER

This drawing is the property of FURMANITE and is not to be used except as expressly authorized by this company. Copies are not to be made without permission.

SIZE	FITTING PART NUMBER	ϕA	L	H_f
		± 0.125	± 0.250	± 0.250
36x20	TF-3615-STD-20	36.125	61.00	27.187
36x22	TF-3615-STD-22	36.125	61.00	27.625
36x24	TF-3615-STD-24	36.125	61.00	27.750
36x26	TF-3615-STD-26	36.125	61.00	26.500
36x28	TF-3615-STD-28	36.125	61.00	26.687
36x30	TF-3615-STD-30	36.125	61.00	27.375
36x32	TF-3615-STD-32	36.125	61.00	27.687
36x34	TF-3615-STD-34	36.125	61.00	27.875
36x36	TF-3615-STD	36.125	61.00	28.187

DESIGN CODE: ANSI/ASME B31.4 & B31.8
DESIGN FACTOR: 0.72
DESIGN PRESSURE: 285 psig
DESIGN TEMP: 100 °F

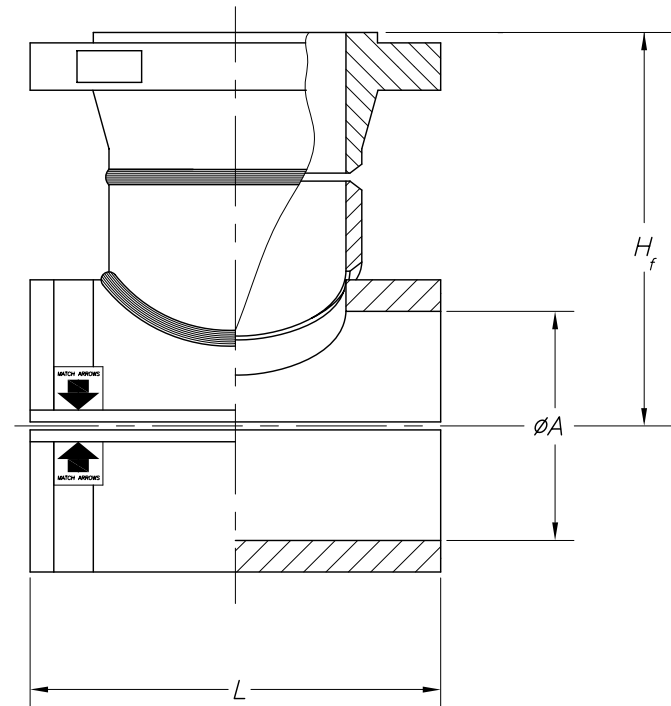

B					
ECN#	MARK	REVISION		BY	DATE
FURMANITE TITLE: GENERAL DIMENSIONS 34" THRU 36"-150# SPLIT TEES		GENERAL FINISH 125✓		DATE: 07OCT93	MATERIAL:
		TOLERANCE UNLESS OTHERWISE SPECIFIED		SCALE: NONE	QTY. REQUIRED:
		1 PLC DEC ± 0.031 2 PLC DEC ± 0.015 3 PLC DEC ± 0.005 FRACTION $\pm 1/4$ ANGULAR $\pm 1^\circ$		DRAWN BY: S.C.Sendelbach	APPROVED BY:
				DRAWING NUMBER: SD-0000-2916	


SIZE	FITTING PART NUMBER	ϕA	L	H_f
		± 0.125	± 0.250	± 0.250
34x4	TF-3430-STD-04	34.125	14.25	23.250
34x6	TF-3430-STD-06	34.125	14.25	23.875
34x8	TF-3430-STD-08	34.125	28.50	25.250
34x10	TF-3430-STD-10	34.125	28.50	25.500
34x12	TF-3430-STD-12	34.125	28.50	26.000
34x14	TF-3430-STD-14	34.125	28.50	26.500
34x16	TF-3430-STD-16	34.125	28.50	26.625
34x18	TF-3430-STD-18	34.125	57.00	27.125
34x20	TF-3430-STD-20	34.125	57.00	27.250
34x22	TF-3430-STD-22	34.125	57.00	27.625
34x24	TF-3430-STD-24	34.125	57.00	27.875
34x26	TF-3430-STD-26	34.125	57.00	28.375
34x28	TF-3430-STD-28	34.125	57.00	28.875
34x30	TF-3430-STD-30	34.125	57.00	29.625
34x32	TF-3430-STD-32	34.125	57.00	30.125
34x34	TF-3430-STD	34.125	57.00	30.500
36x4	TF-3630-STD-04	36.125	15.25	24.250
36x6	TF-3630-STD-06	36.125	15.25	24.875
36x8	TF-3630-STD-08	36.125	15.25	26.250
36x10	TF-3630-STD-10	36.125	30.50	26.500
36x12	TF-3630-STD-12	36.125	30.50	27.000
36x14	TF-3630-STD-14	36.125	30.50	27.500
36x16	TF-3630-STD-16	36.125	30.50	27.625
36x18	TF-3630-STD-18	36.125	30.50	28.125

NOTE: DIMENSIONS ARE TYPICAL AND SUBJECT TO CHANGE DEPENDING ON AVAILABILITY AT TIME OF ORDER

This drawing is the property of FURMANITE and is not to be used except as expressly authorized by this company. Copies are not to be made without permission.

SIZE	FITTING PART NUMBER	ϕA	L	H_f
		± 0.125	± 0.250	± 0.250
36x20	TF-3630-STD-20	36.125	61.00	28.250
36x22	TF-3630-STD-22	36.125	61.00	28.625
36x24	TF-3630-STD-24	36.125	61.00	28.875
36x26	TF-3630-STD-26	36.125	61.00	29.375
36x28	TF-3630-STD-28	36.125	61.00	29.875
36x30	TF-3630-STD-30	36.125	61.00	30.625
36x32	TF-3630-STD-32	36.125	61.00	31.125
36x34	TF-3630-STD-34	36.125	61.00	31.500
36x36	TF-3630-STD	36.125	61.00	31.875

DESIGN CODE: ANSI/ASME B31.4 & B31.8
DESIGN FACTOR: 0.72
DESIGN PRESSURE: 740 psig
DESIGN TEMP: 100 °F

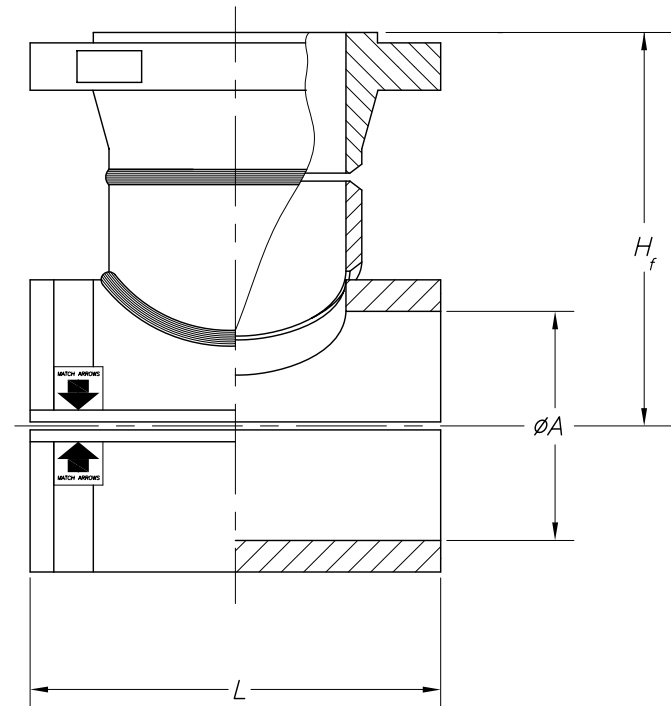

ECN#	MARK	REVISION		BY	DATE
FURMANITE		GENERAL FINISH 125 ✓		DATE:	07OCT93
		TOLERANCE UNLESS OTHERWISE SPECIFIED		SCALE:	NONE
		1 PLC DEC ± 0.031		DRAWN BY:	S.C.Sendelbach
		2 PLC DEC ± 0.015		APPROVED BY:	
TITLE: GENERAL DIMENSIONS 34" THRU 36"-300# SPLIT TEES		3 PLC DEC ± 0.005		DRAWING NUMBER:	
		FRACTION $\pm 1/4$		SD-0000-2917	
		ANGULAR $\pm 1'$			


SIZE	FITTING PART NUMBER	ϕA	L	H_f
		± 0.125	± 0.250	± 0.250
34x4	TF-3460-STD-04	34.125	14.25	24.875
34x6	TF-3460-STD-06	34.125	14.25	25.500
34x8	TF-3460-STD-08	34.125	28.50	27.125
34x10	TF-3460-STD-10	34.125	28.50	27.875
34x12	TF-3460-STD-12	34.125	28.50	28.000
34x14	TF-3460-STD-14	34.125	28.50	28.375
34x16	TF-3460-STD-16	34.125	28.50	28.875
34x18	TF-3460-STD-18	34.125	57.00	29.125
34x20	TF-3460-STD-20	34.125	57.00	29.375
34x22	TF-3460-STD-22	34.125	57.00	29.875
34x24	TF-3460-STD-24	34.125	57.00	30.125
34x26	TF-3460-STD-26	34.125	57.00	30.875
34x28	TF-3460-STD-28	34.125	57.00	31.375
34x30	TF-3460-STD-30	34.125	57.00	32.125
34x32	TF-3460-STD-32	34.125	57.00	32.625
34x34	TF-3460-STD	34.125	57.00	33.000
36x4	TF-3660-STD-04	36.125	15.25	25.875
36x6	TF-3660-STD-06	36.125	15.25	26.500
36x8	TF-3660-STD-08	36.125	15.25	28.125
36x10	TF-3660-STD-10	36.125	30.50	28.875
36x12	TF-3660-STD-12	36.125	30.50	29.000
36x14	TF-3660-STD-14	36.125	30.50	29.375
36x16	TF-3660-STD-16	36.125	30.50	29.875
36x18	TF-3660-STD-18	36.125	30.50	30.125

NOTE: DIMENSIONS ARE TYPICAL AND SUBJECT TO CHANGE DEPENDING ON AVAILABILITY AT TIME OF ORDER

This drawing is the property of FURMANITE and is not to be used except as expressly authorized by this company. Copies are not to be made without permission.

SIZE	FITTING PART NUMBER	ϕA	L	H_f
		± 0.125	± 0.250	± 0.250
36x20	TF-3660-STD-20	36.125	61.00	30.375
36x22	TF-3660-STD-22	36.125	61.00	30.875
36x24	TF-3660-STD-24	36.125	61.00	31.125
36x26	TF-3660-STD-26	36.125	61.00	31.875
36x28	TF-3660-STD-28	36.125	61.00	32.375
36x30	TF-3660-STD-30	36.125	61.00	33.125
36x32	TF-3660-STD-32	36.125	61.00	33.625
36x34	TF-3660-STD-34	36.125	61.00	34.000
36x36	TF-3660-STD	36.125	61.00	34.500

DESIGN CODE: ANSI/ASME B31.4 & B31.8
DESIGN FACTOR: 0.72
DESIGN PRESSURE: 1480 psig
DESIGN TEMP: 100 °F

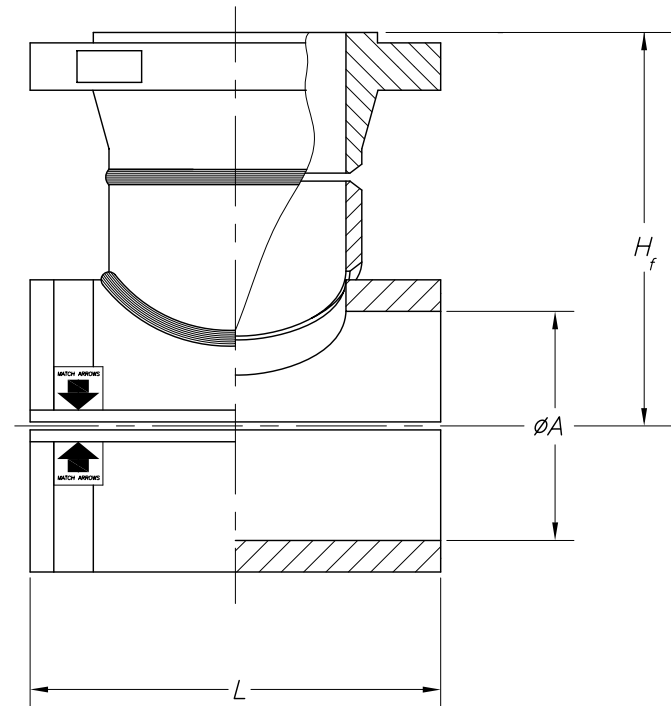

B						
ECN#	MARK	REVISION			BY	DATE
FURMANITE		GENERAL FINISH 125 ✓		DATE: 07OCT93	MATERIAL:	
		TOLERANCE UNLESS OTHERWISE SPECIFIED		SCALE: NONE	QTY. REQUIRED:	
		1 PLC DEC ±0.031 2 PLC DEC ±0.015 3 PLC DEC ±0.005 FRACTION ±1/4 ANGULAR ±1°		DRAWN BY: S.C.Sendelbach	APPROVED BY:	
TITLE: GENERAL DIMENSIONS 34" THRU 36"—600# SPLIT TEES				DRAWING NUMBER: SD—0000—2918		