Birch step stool

Assembly instructions. One person, about 15 minutes.

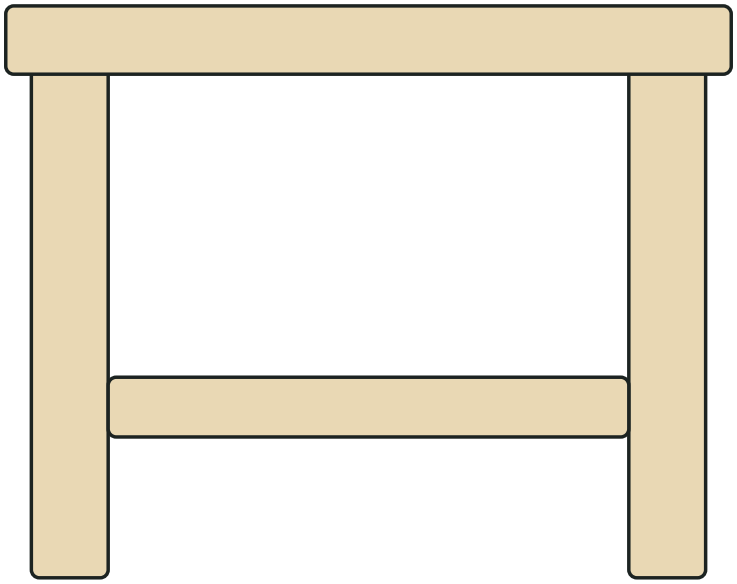

Fictional sample product for testing Apprentice.

Parts

A

1x Seat

B

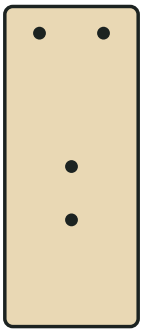

2x Side panel

C

1x Back rail

D

8x Wooden dowel

E



8x Screw

F

1x Hex key

1 Dowels into the top edges

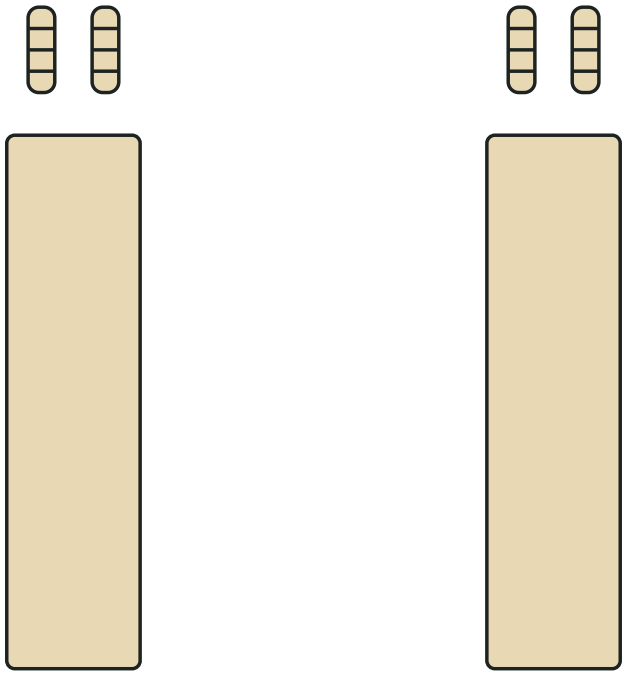

B 2x D 4x

Push two dowels D into the holes on the top edge of each side panel B.

2 Dowels for the back rail

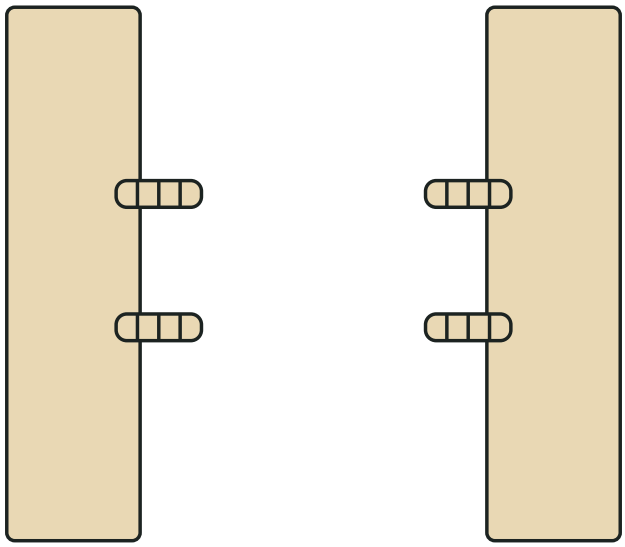

B 2x D 4x

Push two dowels D into the holes on the inner face of each side panel B.

3 Attach the back rail

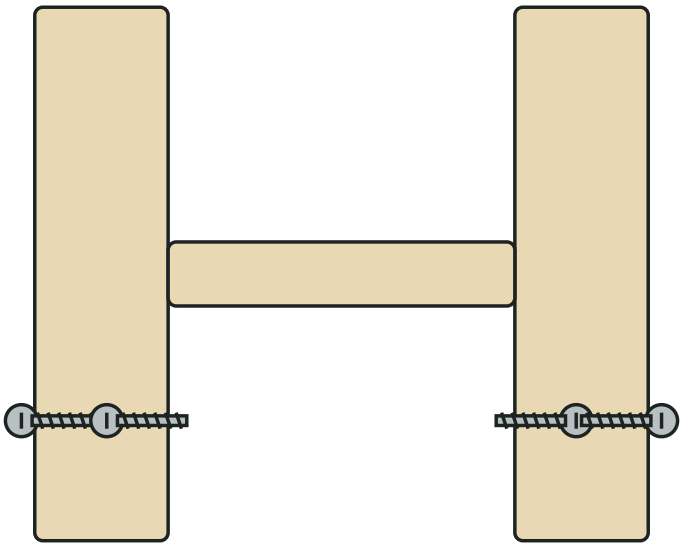

C 1x E 4x

Fit rail C onto the dowels between the two side panels B, then fix it with four screws E.

! Do not overtighten: the screws can strip the birch.

4 Fit the seat

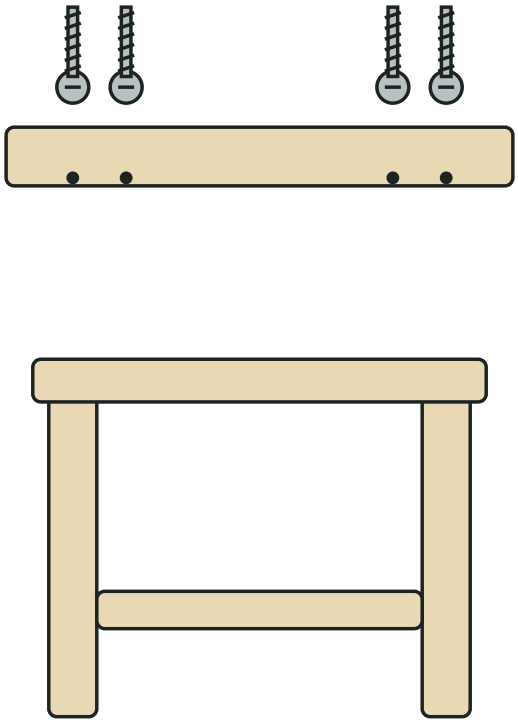

Ⓐ **1x** Ⓔ **4x**

Lower seat A onto the top dowels, holes facing down, and fix it with four screws E.

5 Tighten and test

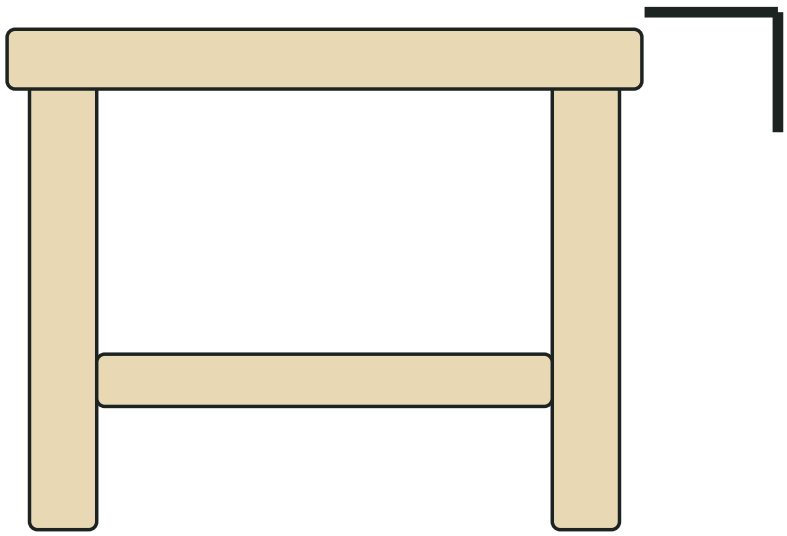

F **1x**

Tighten every screw with hex key F, then stand the stool on the floor and press on each corner.

! Maximum load 100 kg.