TEST REPORT

Applicant:	ZHEJIANG QIDI TECHNOLOGY CO.,LTD
Address:	No.709 Huaguang Road, Tingtian Street, Wenzhou City, Zhejiang Province
Manufacturer:	ZHEJIANG QIDI TECHNOLOGY CO.,LTD
Address:	No.709 Huaguang Road, Tingtian Street, Wenzhou City, Zhejiang Province
Product Name:	3D printer
Trade Mark:	N/A
Model Number:	Max4, Plus5
Date of Receipt:	Nov. 19, 2025
Test Date:	Nov. 19, 2025 - Dec. 04, 2025
Date of Report:	Dec. 04, 2025
Prepared By:	Shenzhen DL Testing Technology Co., Ltd.
Address:	101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China
Applicable Standards:	J55032(H29)
Test Result:	Pass
Report Number:	DLE-251119037R

Prepared (Engineer):	Ken Tan
Reviewer (Supervisor):	Jack Bu
Approved (Manager):	Jade Yang

This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.

TABLE OF CONTENT

Test Report Declaration Page

1. VERSION

Version No.	Date	Description
00	Dec. 04, 2025	Original

2. TEST SUMMARY

EMC Emission				
Standard	Test Item	Limit	Result	Remark
J55032	Conducted Emission at power ports	Class B	PASS	
	Conducted Emission at LAN port	Class B	N/A	
	Radiated Emission below 1GHz	Class B	PASS	
	Radiated Emission above 1GHz	Class B	PASS	

NOTE:

(1)” N/A” denotes test is not applicable in this Test Report

(2) Test Facility: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

3. GENERAL INFORMATION

3.1 Description of Device (EUT)

Product Name:	3D printer
Trade Mark:	N/A
Model Number:	Max4, Plus5
Test Model:	Max4
Model Difference:	All models are same as the samples except model name and appearance color, they have the same structure and circuit.
Power Supply:	100-240V~ 50/60Hz 3.4A Max
Work Frequency:	Above 108MHz

(1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

(2) The EUT's all information provided by client.

3.2 Tested System Details

None.

3.3 Block Diagram of Test Set-up

3.4 Test Mode Description

Mode1. On Mode

3.5 Test Auxiliary Equipment

None.

3.6 Test Uncertainty

Conducted Emission Uncertainty	:	±2.56dB
Radiated Emission Uncertainty	:	±3.24dB

4. TEST INSTRUMENT USED

For Conducted Emission Test (843 Shielded Room)

Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
843 Shielded Room	YIHENG	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
EMI Receiver	R&S	ESR	101421	Oct. 25, 2025	Oct. 24, 2026
LISN	R&S	ENV216	102417	Oct. 25, 2025	Oct. 24, 2026
Clamp	COM-POWER	CLA-050	431072	Oct. 27, 2025	Oct. 26, 2026
3-Loop Antenna	DAZE	ZN30401	13021	Oct. 27, 2025	Oct. 26, 2026
ISN T8	Schwarzbeck	NTFM 8158	101135	Oct. 25, 2025	Oct. 24, 2026
ISN T5	Schwarzbeck	NTFM 8158	101136	Oct. 25, 2025	Oct. 24, 2026
843 Cable 1#	ChengYu	CE Cable	001	Oct. 25, 2025	Oct. 24, 2026
843 Cable 1#	ChengYu	CL Cable	002	Oct. 25, 2025	Oct. 24, 2026

For Radiated Emission Test (966 chamber)

Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
966 chamber	YIHENG	966 Room	966	Nov. 06, 2023	Nov. 05, 2026
Spectrum Analyzer	Agilent	E4408B	MY50140780	Oct. 25, 2025	Oct. 24, 2026
EMI Receiver	R&S	ESRP7	101393	Oct. 25, 2025	Oct. 24, 2026
Amplifier	Schwarzbeck	BBV9743B	00153	Oct. 25, 2025	Oct. 24, 2026
Amplifier	EMEC	EM01G8GA	00270	Oct. 25, 2025	Oct. 24, 2026
Broadband Trilog Antenna	Schwarzbeck	VULB9162	00306	Oct. 27, 2025	Oct. 26, 2026
Horn Antenna	Schwarzbeck	BBHA9120D	02139	Oct. 27, 2025	Oct. 26, 2026
966 Cable 1#	ChengYu	966	004	Oct. 25, 2025	Oct. 24, 2026
966 Cable 2#	ChengYu	966	003	Oct. 25, 2025	Oct. 24, 2026

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMC	FA-03A2

5. CONDUCTED EMISSION TEST

5.1 Block Diagram of Test Setup

For Mains Terminals Test

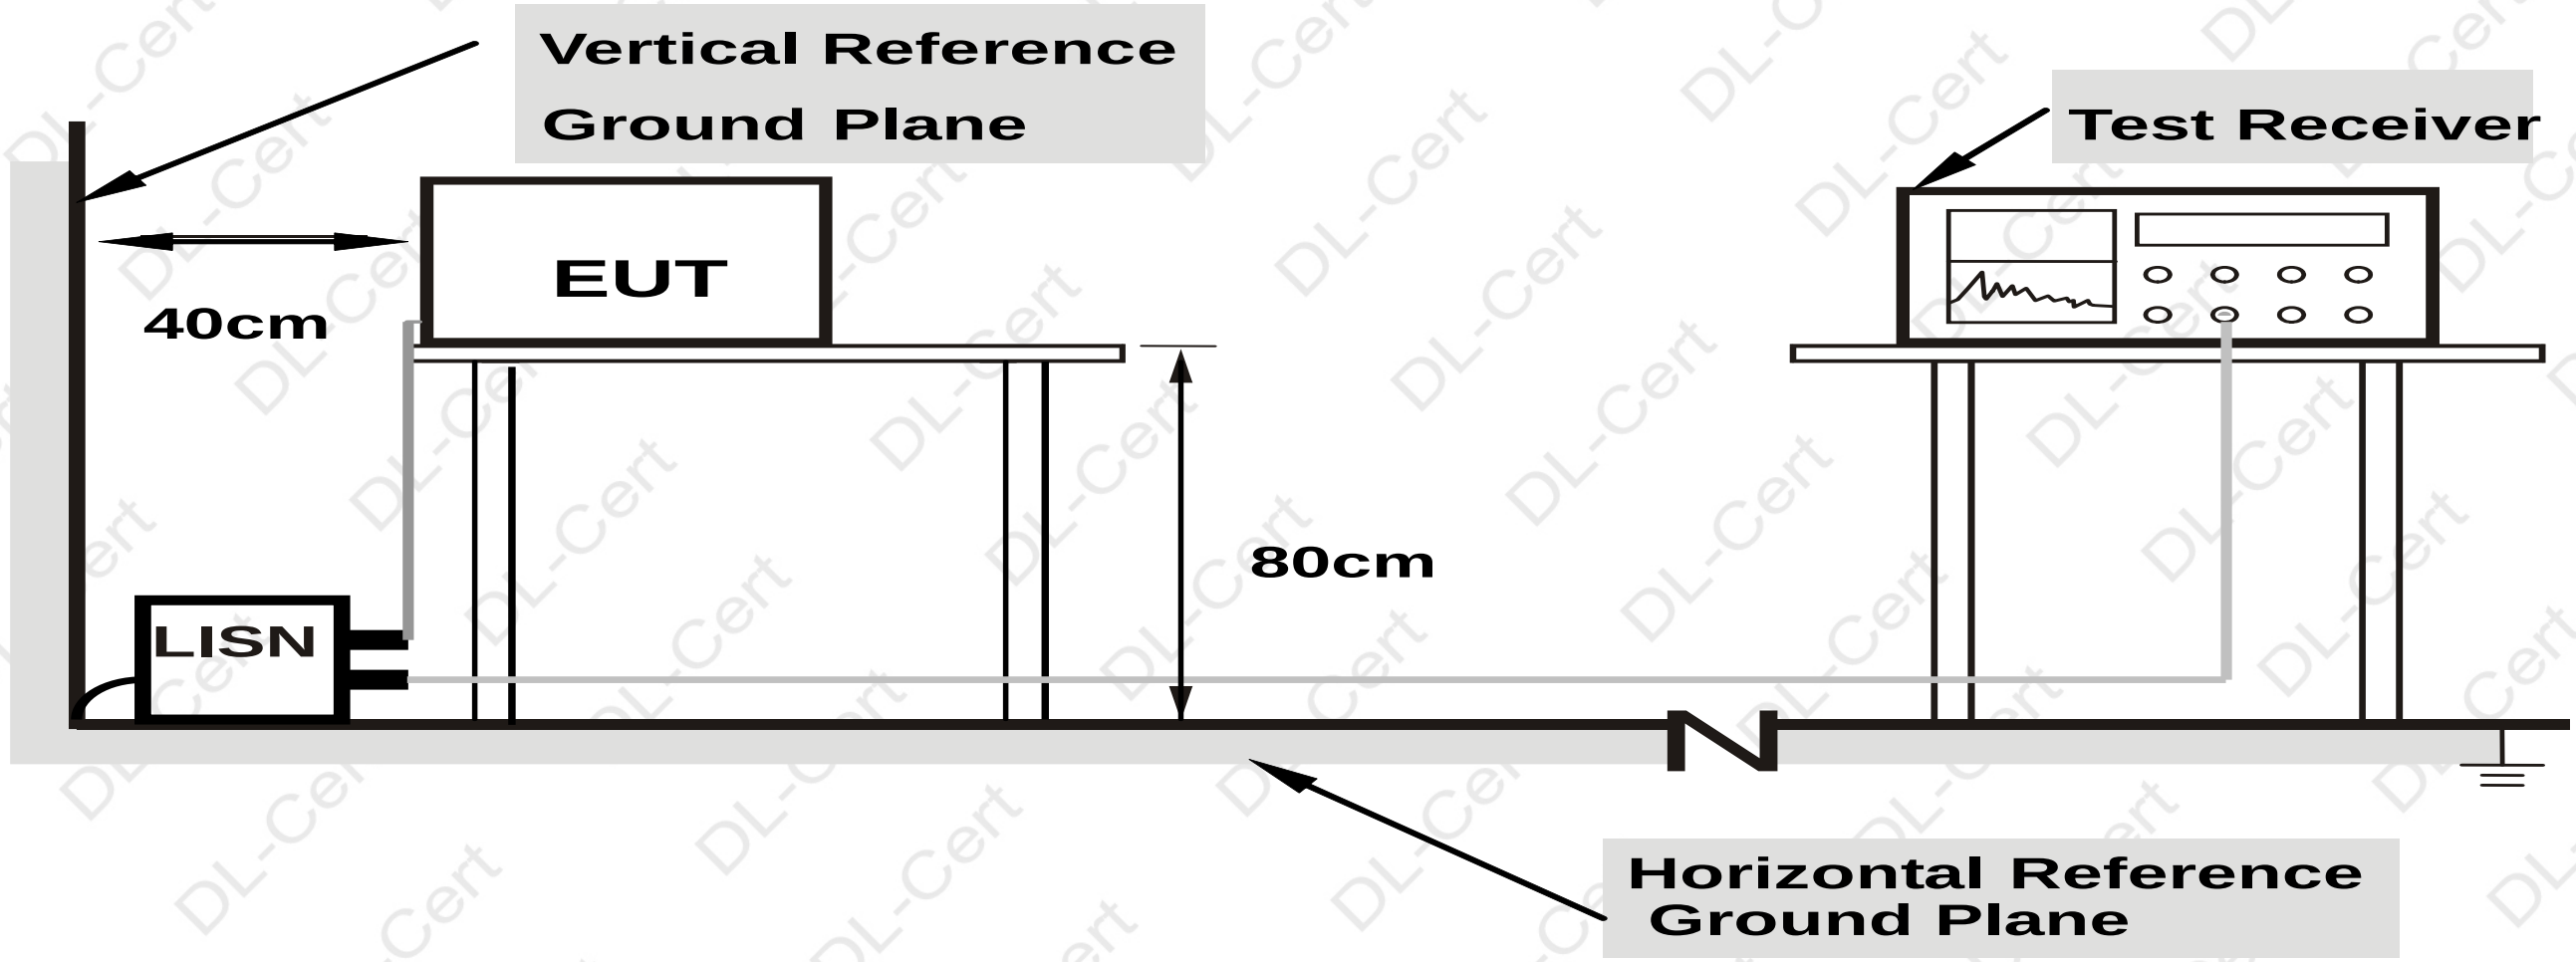

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For Telecom Port Test

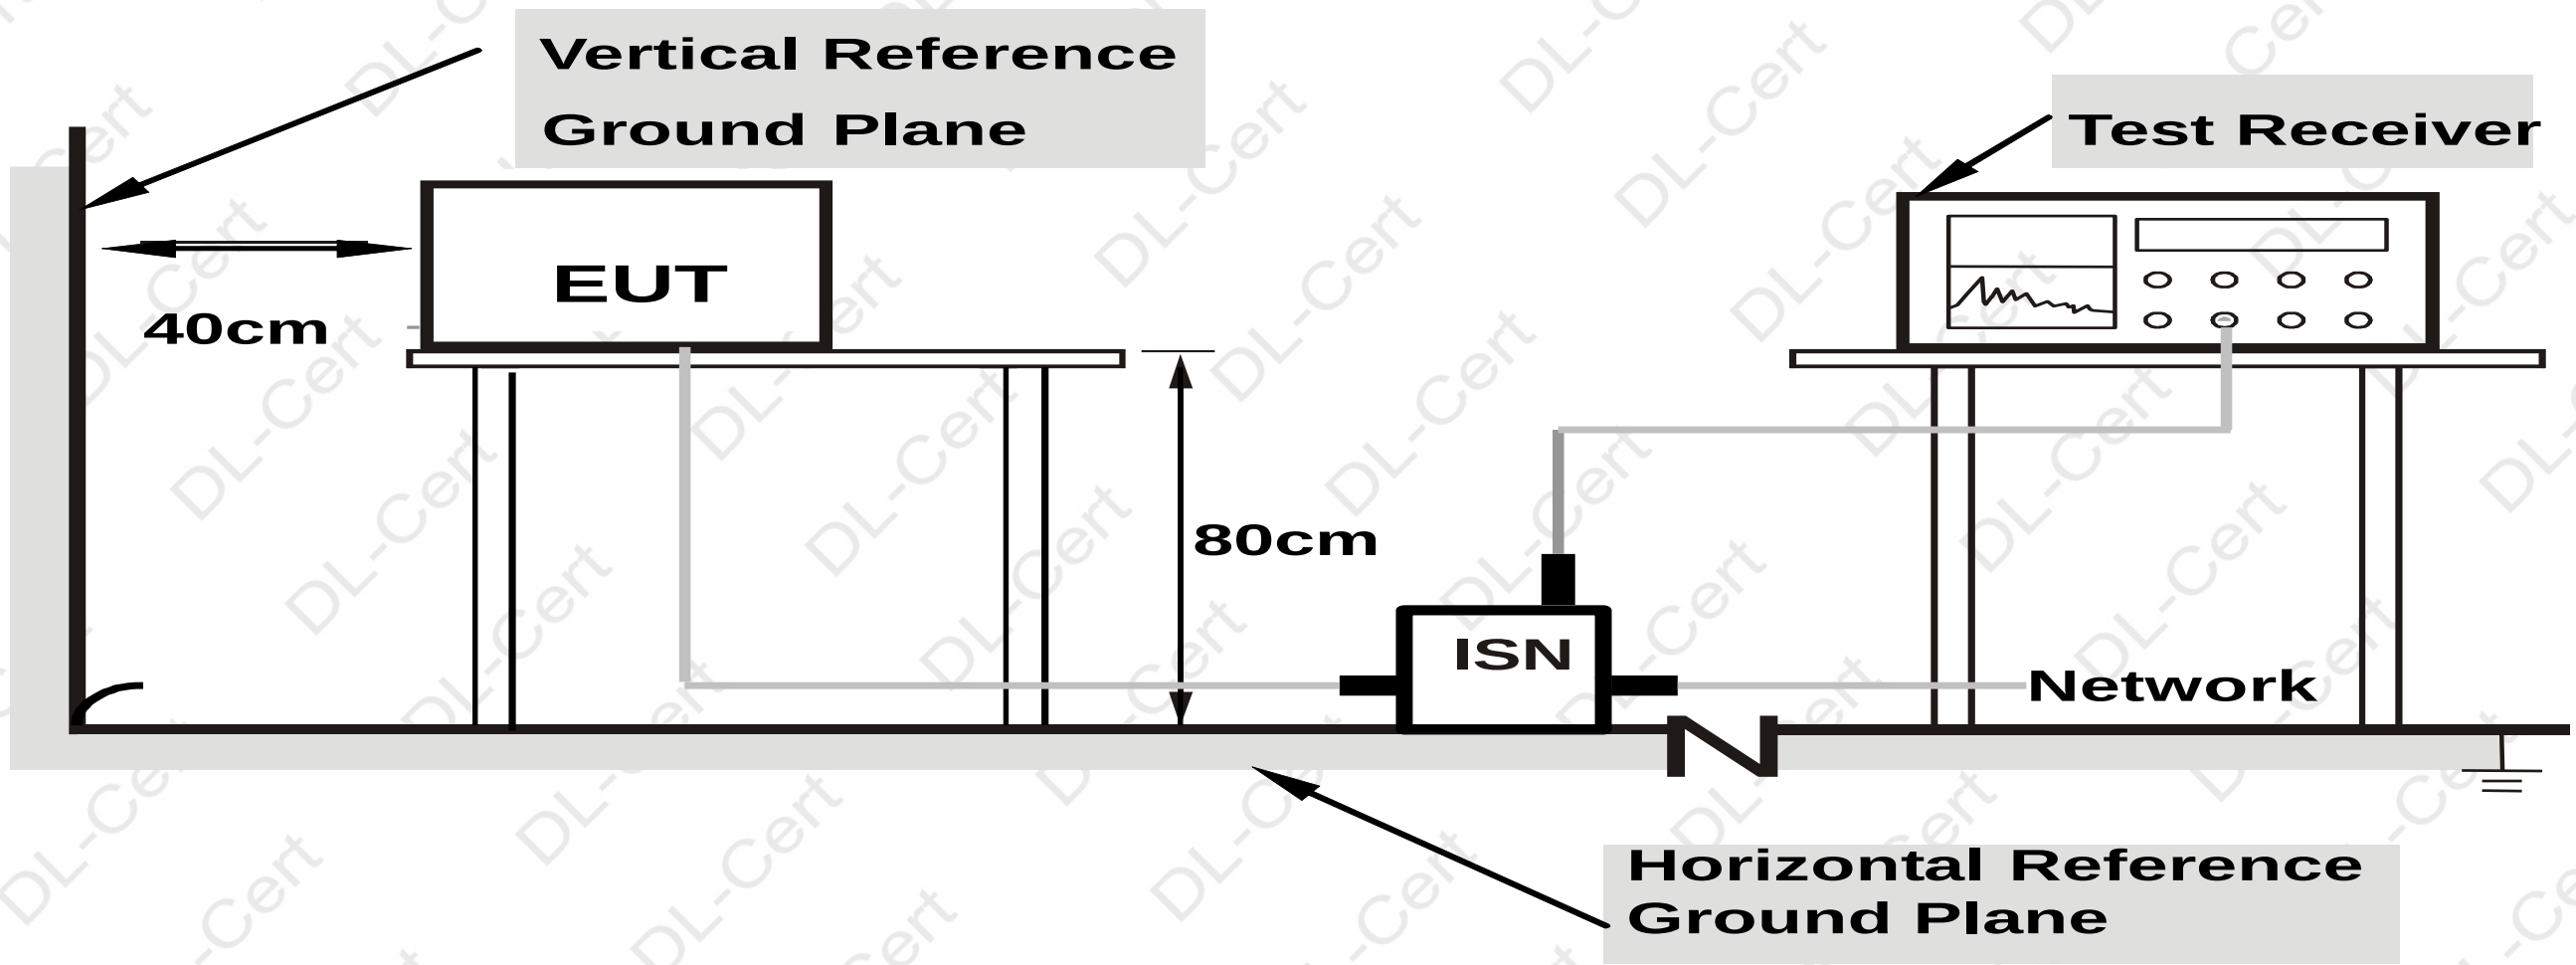

Note: 1.Support units were connected to second LISN.

2.Both of ISNs are 80 cm from EUT and at least 80 cm from other units and other metal planes

5.2 Test Standard and Limit

J55032

For Mains Terminals Test			For Telecom Port Test		
Frequency MHz	Limits dB(μV)		Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level		Quasi-peak Level	Average Level
0.15~0.50	66 ~ 56*	56 ~ 46*	0.15~0.50	84 ~ 74*	74 ~ 64*
0.50~5.00	56	46	0.50~30.00	74	64
5.00~30.00	60	50	/	/	/

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

5.3 EUT Configuration on Test

The following equipment's are installed on conducted emission test to meet J55032 requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

5.4 Operating Condition of EUT

5.4.1 Setup the EUT and simulators as shown in Section 5.1.
5.4.2 Turn on the power of all equipments.
5.4.3 Let the EUT work in test modes and test it.

5.5 Test Procedure

The EUT is put on the table and connected to the AC mains through a Artificial Mains Network (AMN) or ISN. This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are checked to find out the maximum conducted emission levels according to the **J55032** regulations during conducted emission test.

The bandwidth of the test receiver (R&S Test Receiver ESR) is set at 10KHz.

The frequency range from 150 KHz to 30 MHz is investigated.

5.6 Test Result

PASS
Please refer to the following page.

Conducted Emission Test Data			
Temperature:	24.5 ℃	Relative Humidity:	54%
Pressure:	1009hPa	Phase:	Line
Test Voltage:	AC 100V/50Hz	Test Mode:	Mode 1

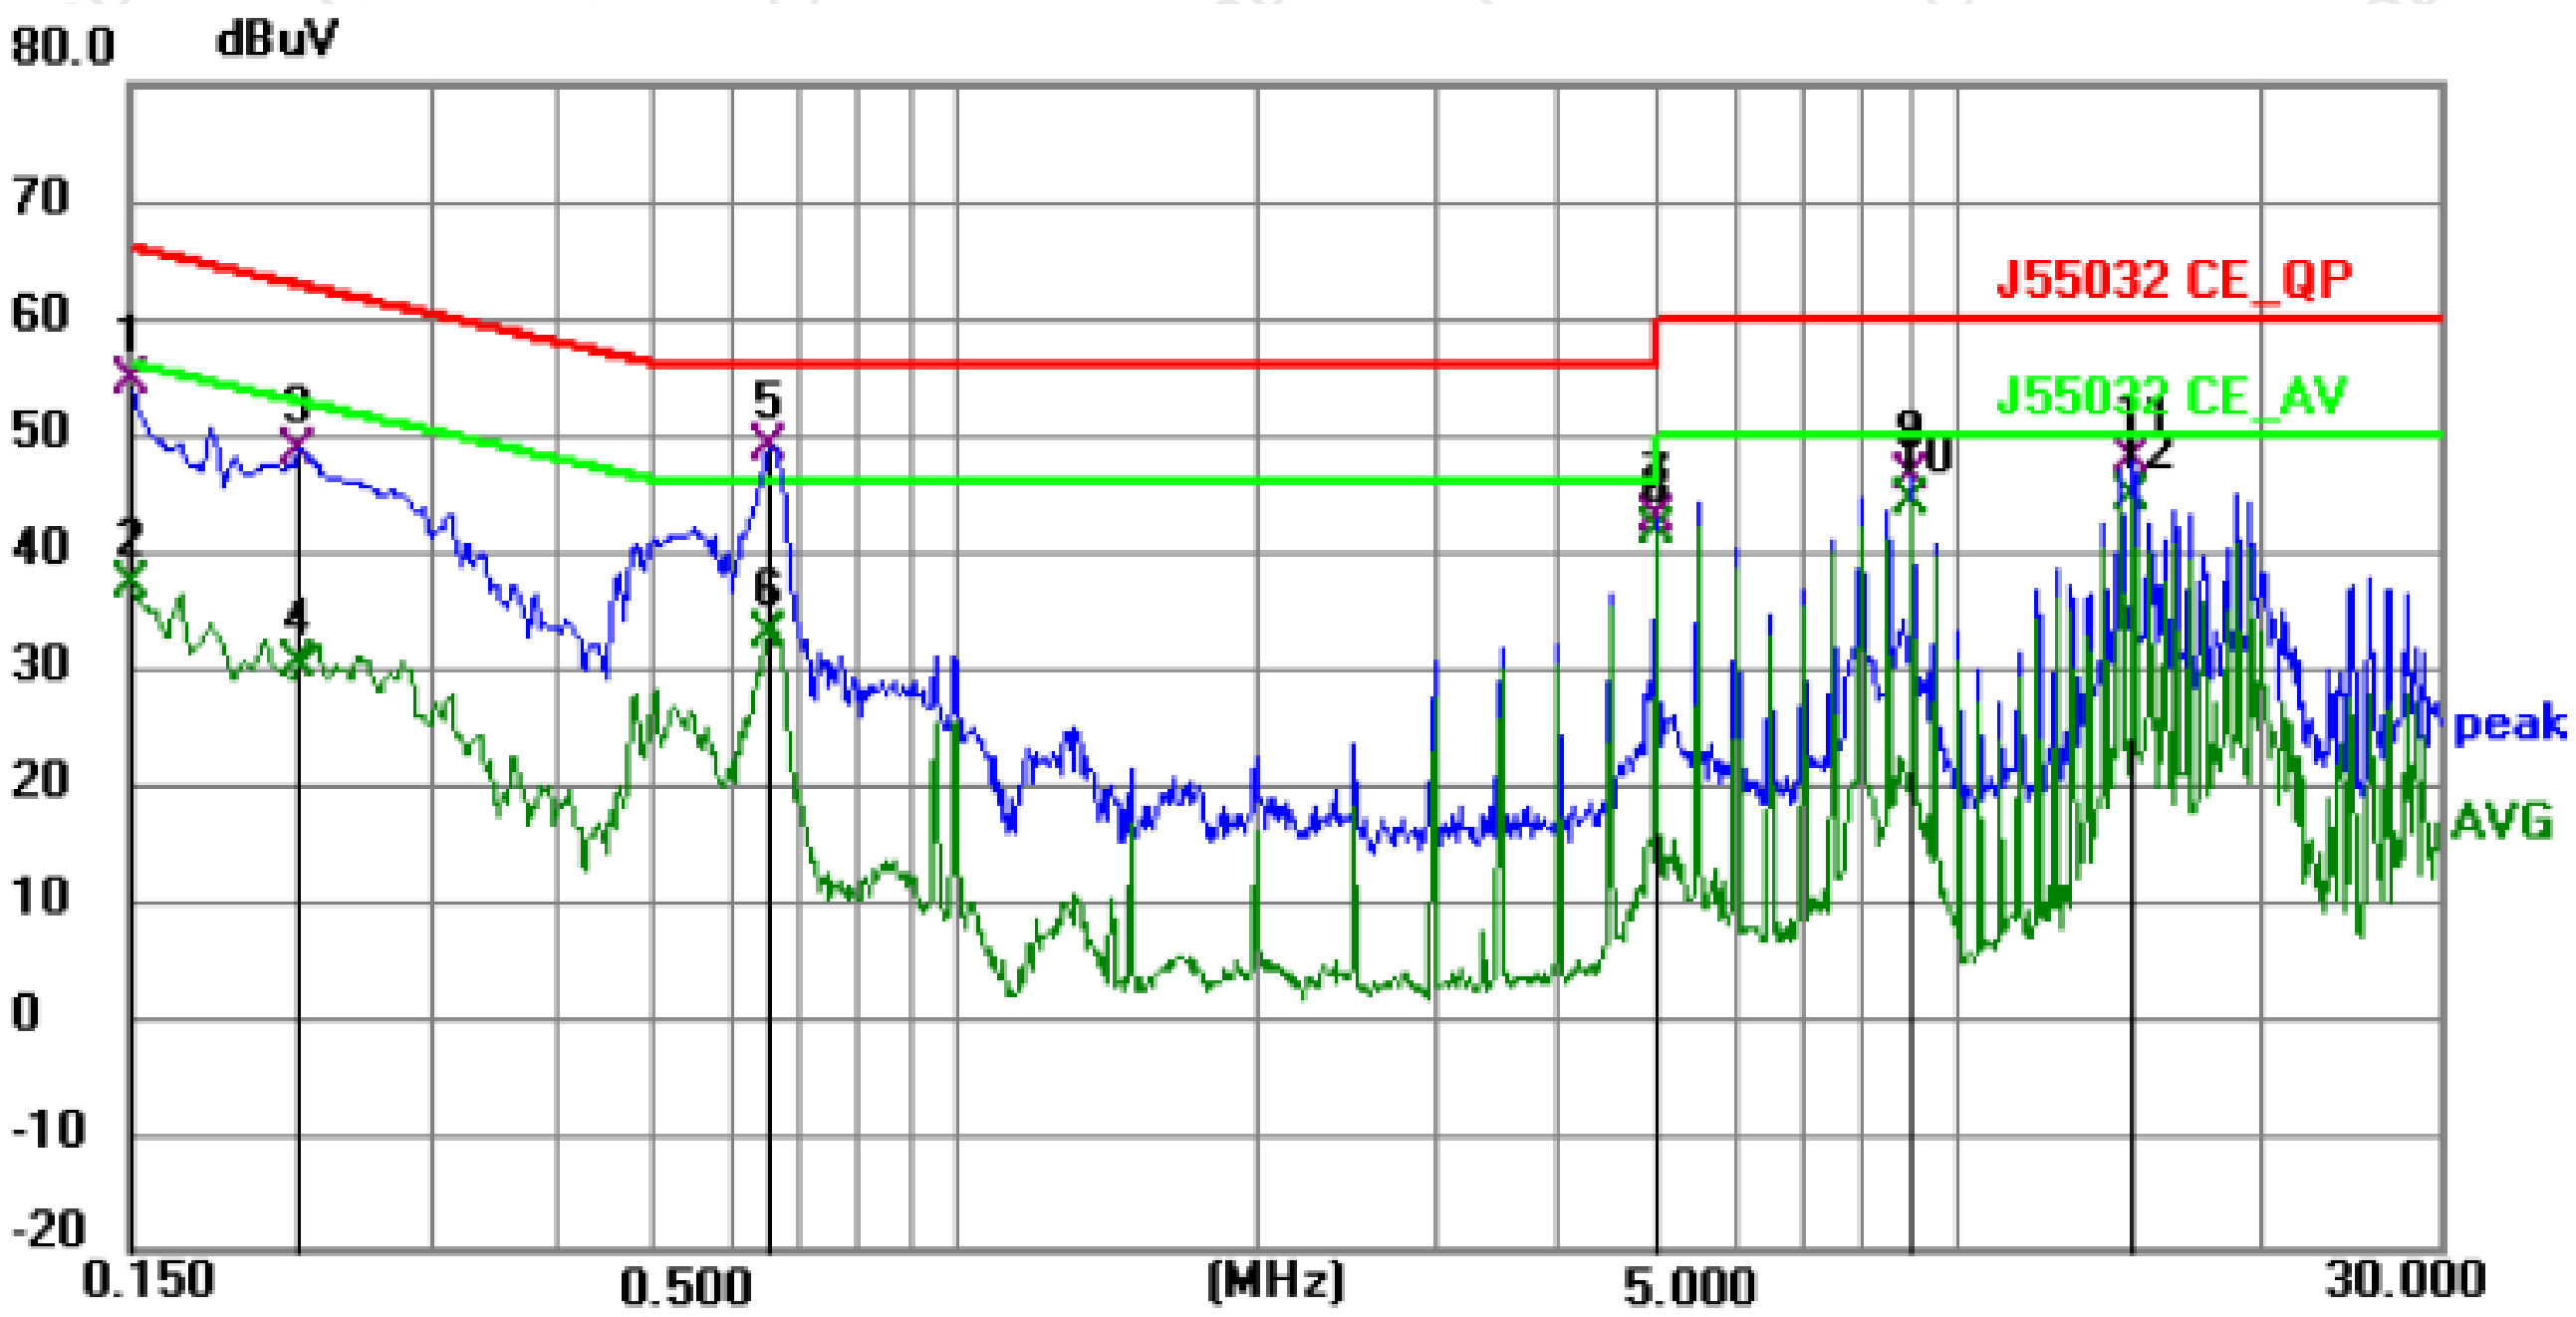

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	44.33	9.99	54.32	66.00	-11.68	QP	P	
2	0.1500	26.87	9.99	36.86	56.00	-19.14	AVG	P	
3	0.2220	38.45	9.94	48.39	62.74	-14.35	QP	P	
4	0.2220	20.40	9.94	30.34	52.74	-22.40	AVG	P	
5	0.6540	38.79	9.90	48.69	56.00	-7.31	QP	P	
6	0.6540	22.88	9.90	32.78	46.00	-13.22	AVG	P	
7	4.9920	32.72	9.93	42.65	56.00	-13.35	QP	P	
8 *	4.9920	31.73	9.93	41.66	46.00	-4.34	AVG	P	
9	8.9880	36.18	9.93	46.11	60.00	-13.89	QP	P	
10	8.9880	34.31	9.93	44.24	50.00	-5.76	AVG	P	
11	14.9775	37.62	9.96	47.58	60.00	-12.42	QP	P	
12	14.9775	34.42	9.96	44.38	50.00	-5.62	AVG	P	

Remark:

Margin = Level –Limit, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

Conducted Emission Test Data			
Temperature:	24.5 ℃	Relative Humidity:	54%
Pressure:	1009hPa	Phase:	Neutral
Test Voltage:	AC 100V/50Hz	Test Mode:	Mode 1

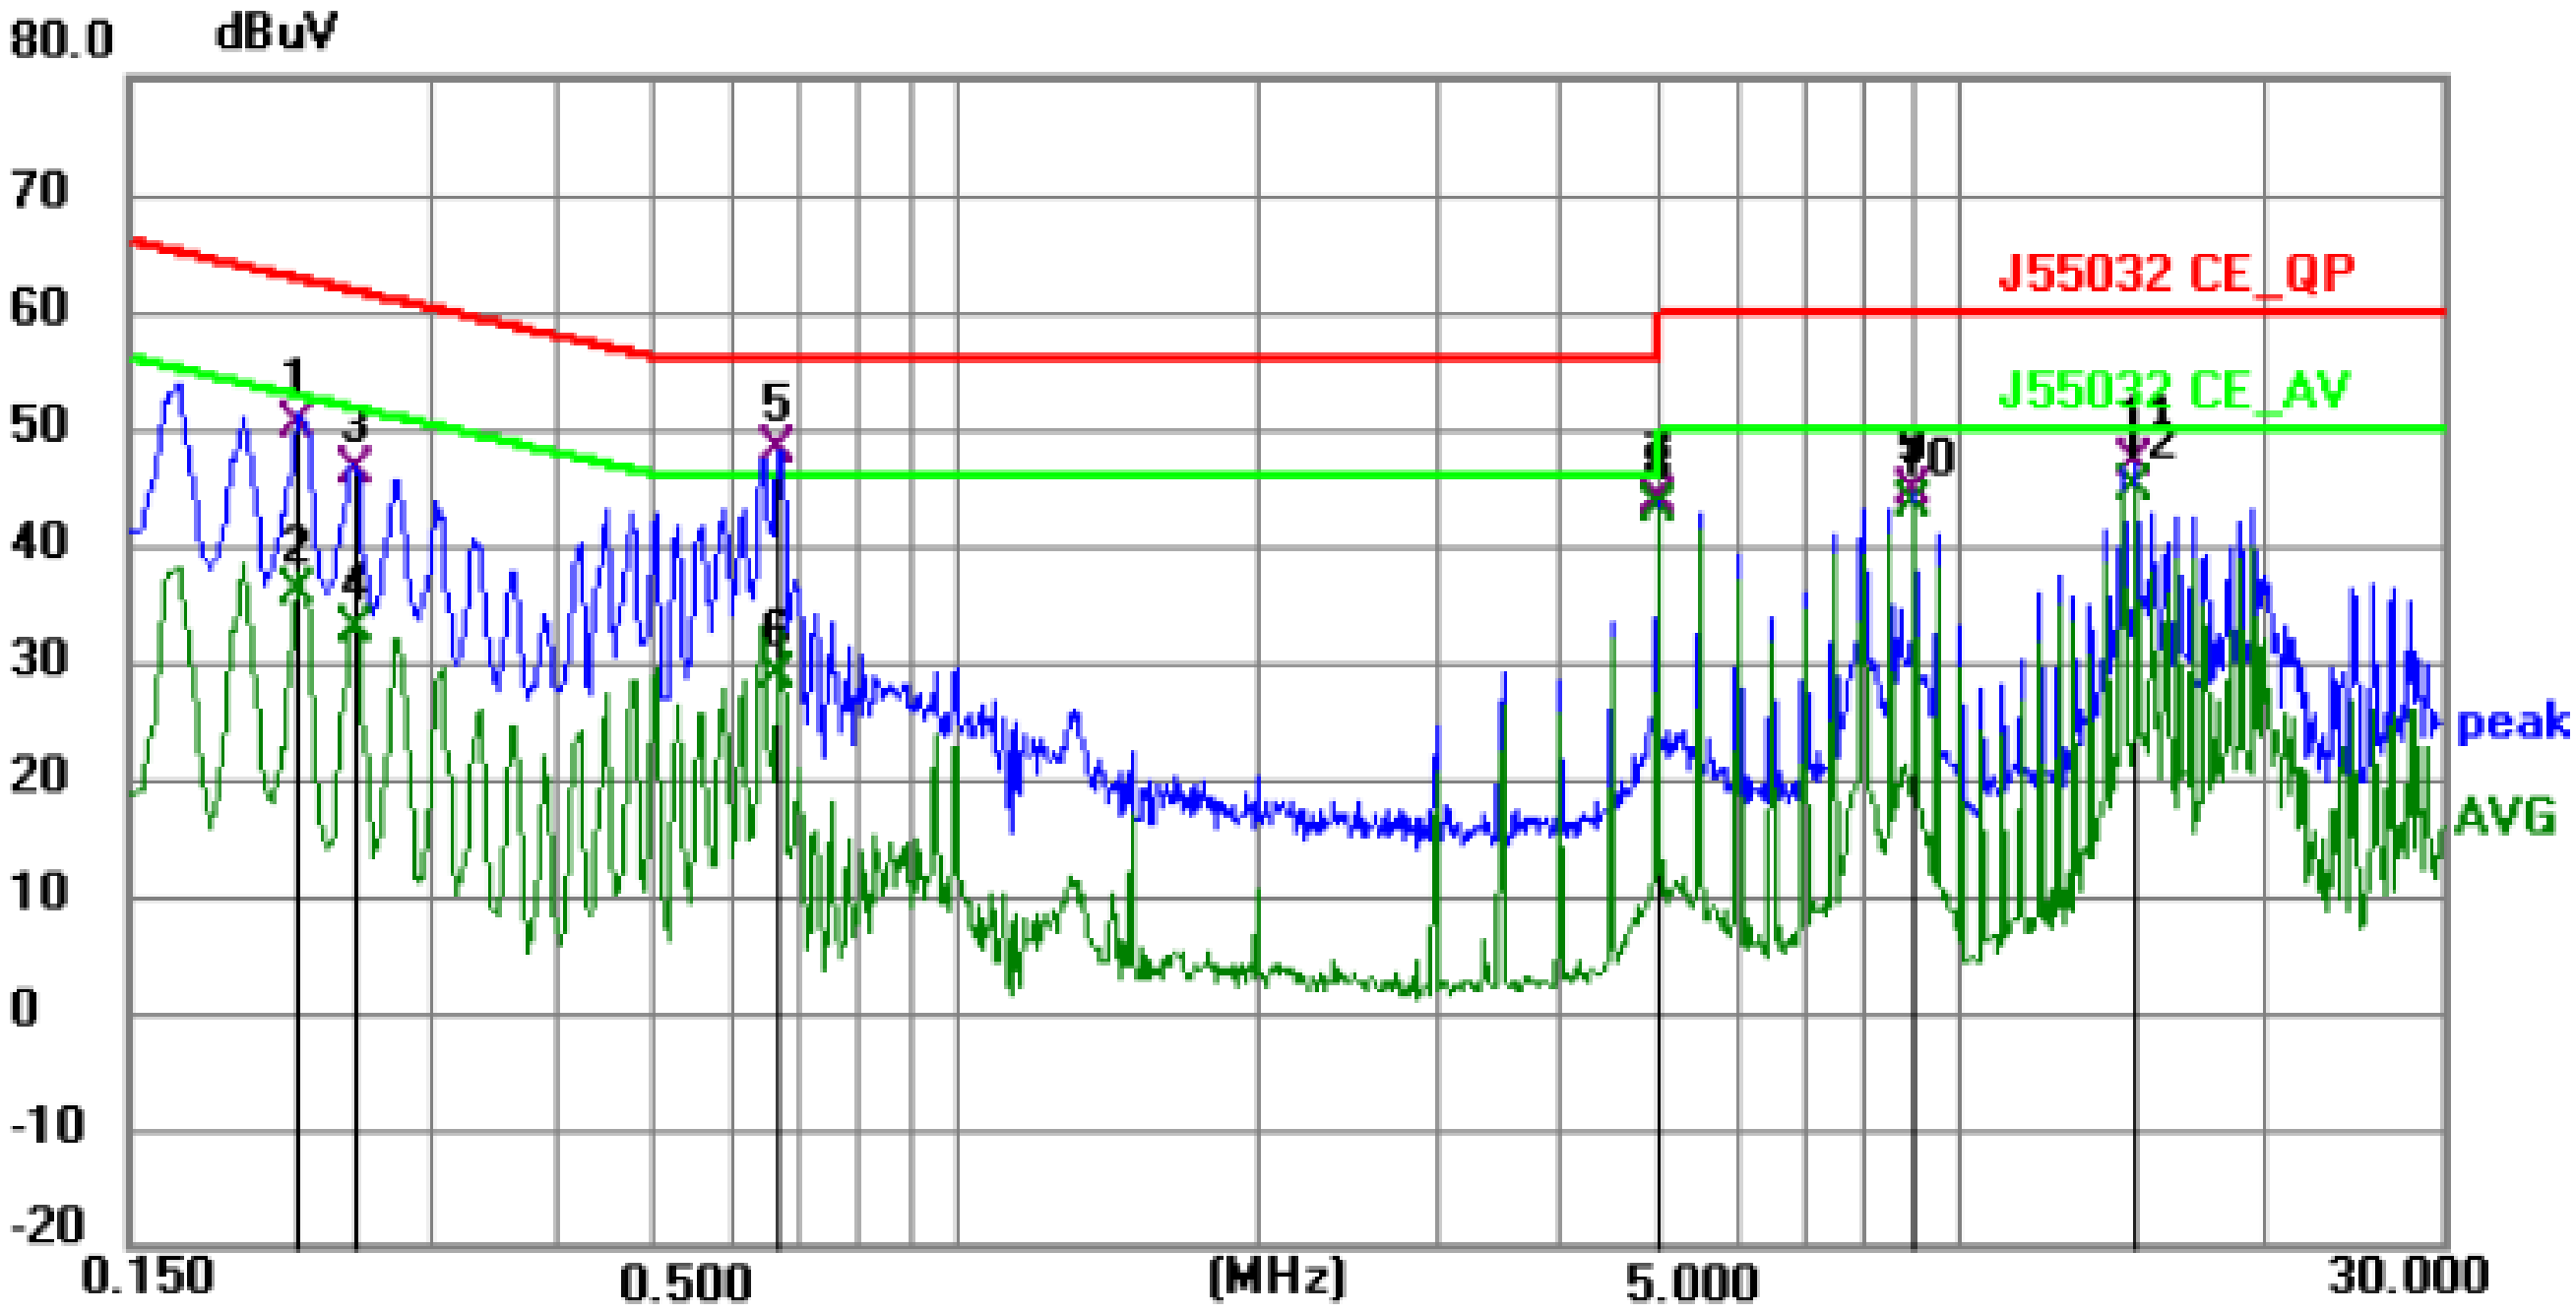

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2220	40.10	9.94	50.04	62.74	-12.70	QP	P	
2	0.2220	25.97	9.94	35.91	52.74	-16.83	AVG	P	
3	0.2535	36.36	9.97	46.33	61.64	-15.31	QP	P	
4	0.2535	22.83	9.97	32.80	51.64	-18.84	AVG	P	
5	0.6630	38.15	9.93	48.08	56.00	-7.92	QP	P	
6	0.6630	18.95	9.93	28.88	46.00	-17.12	AVG	P	
7	4.9920	33.92	9.93	43.85	56.00	-12.15	QP	P	
8 *	4.9920	33.02	9.93	42.95	46.00	-3.05	AVG	P	
9	8.9835	34.70	9.93	44.63	60.00	-15.37	QP	P	
10	8.9835	33.36	9.93	43.29	50.00	-6.71	AVG	P	
11	14.9730	37.16	9.96	47.12	60.00	-12.88	QP	P	
12	14.9730	34.70	9.96	44.66	50.00	-5.34	AVG	P	

Remark:

Margin = Level –Limit, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

6. RADIATION EMISSION TEST

6.1 Block Diagram of Test Setup

Below 1GHz

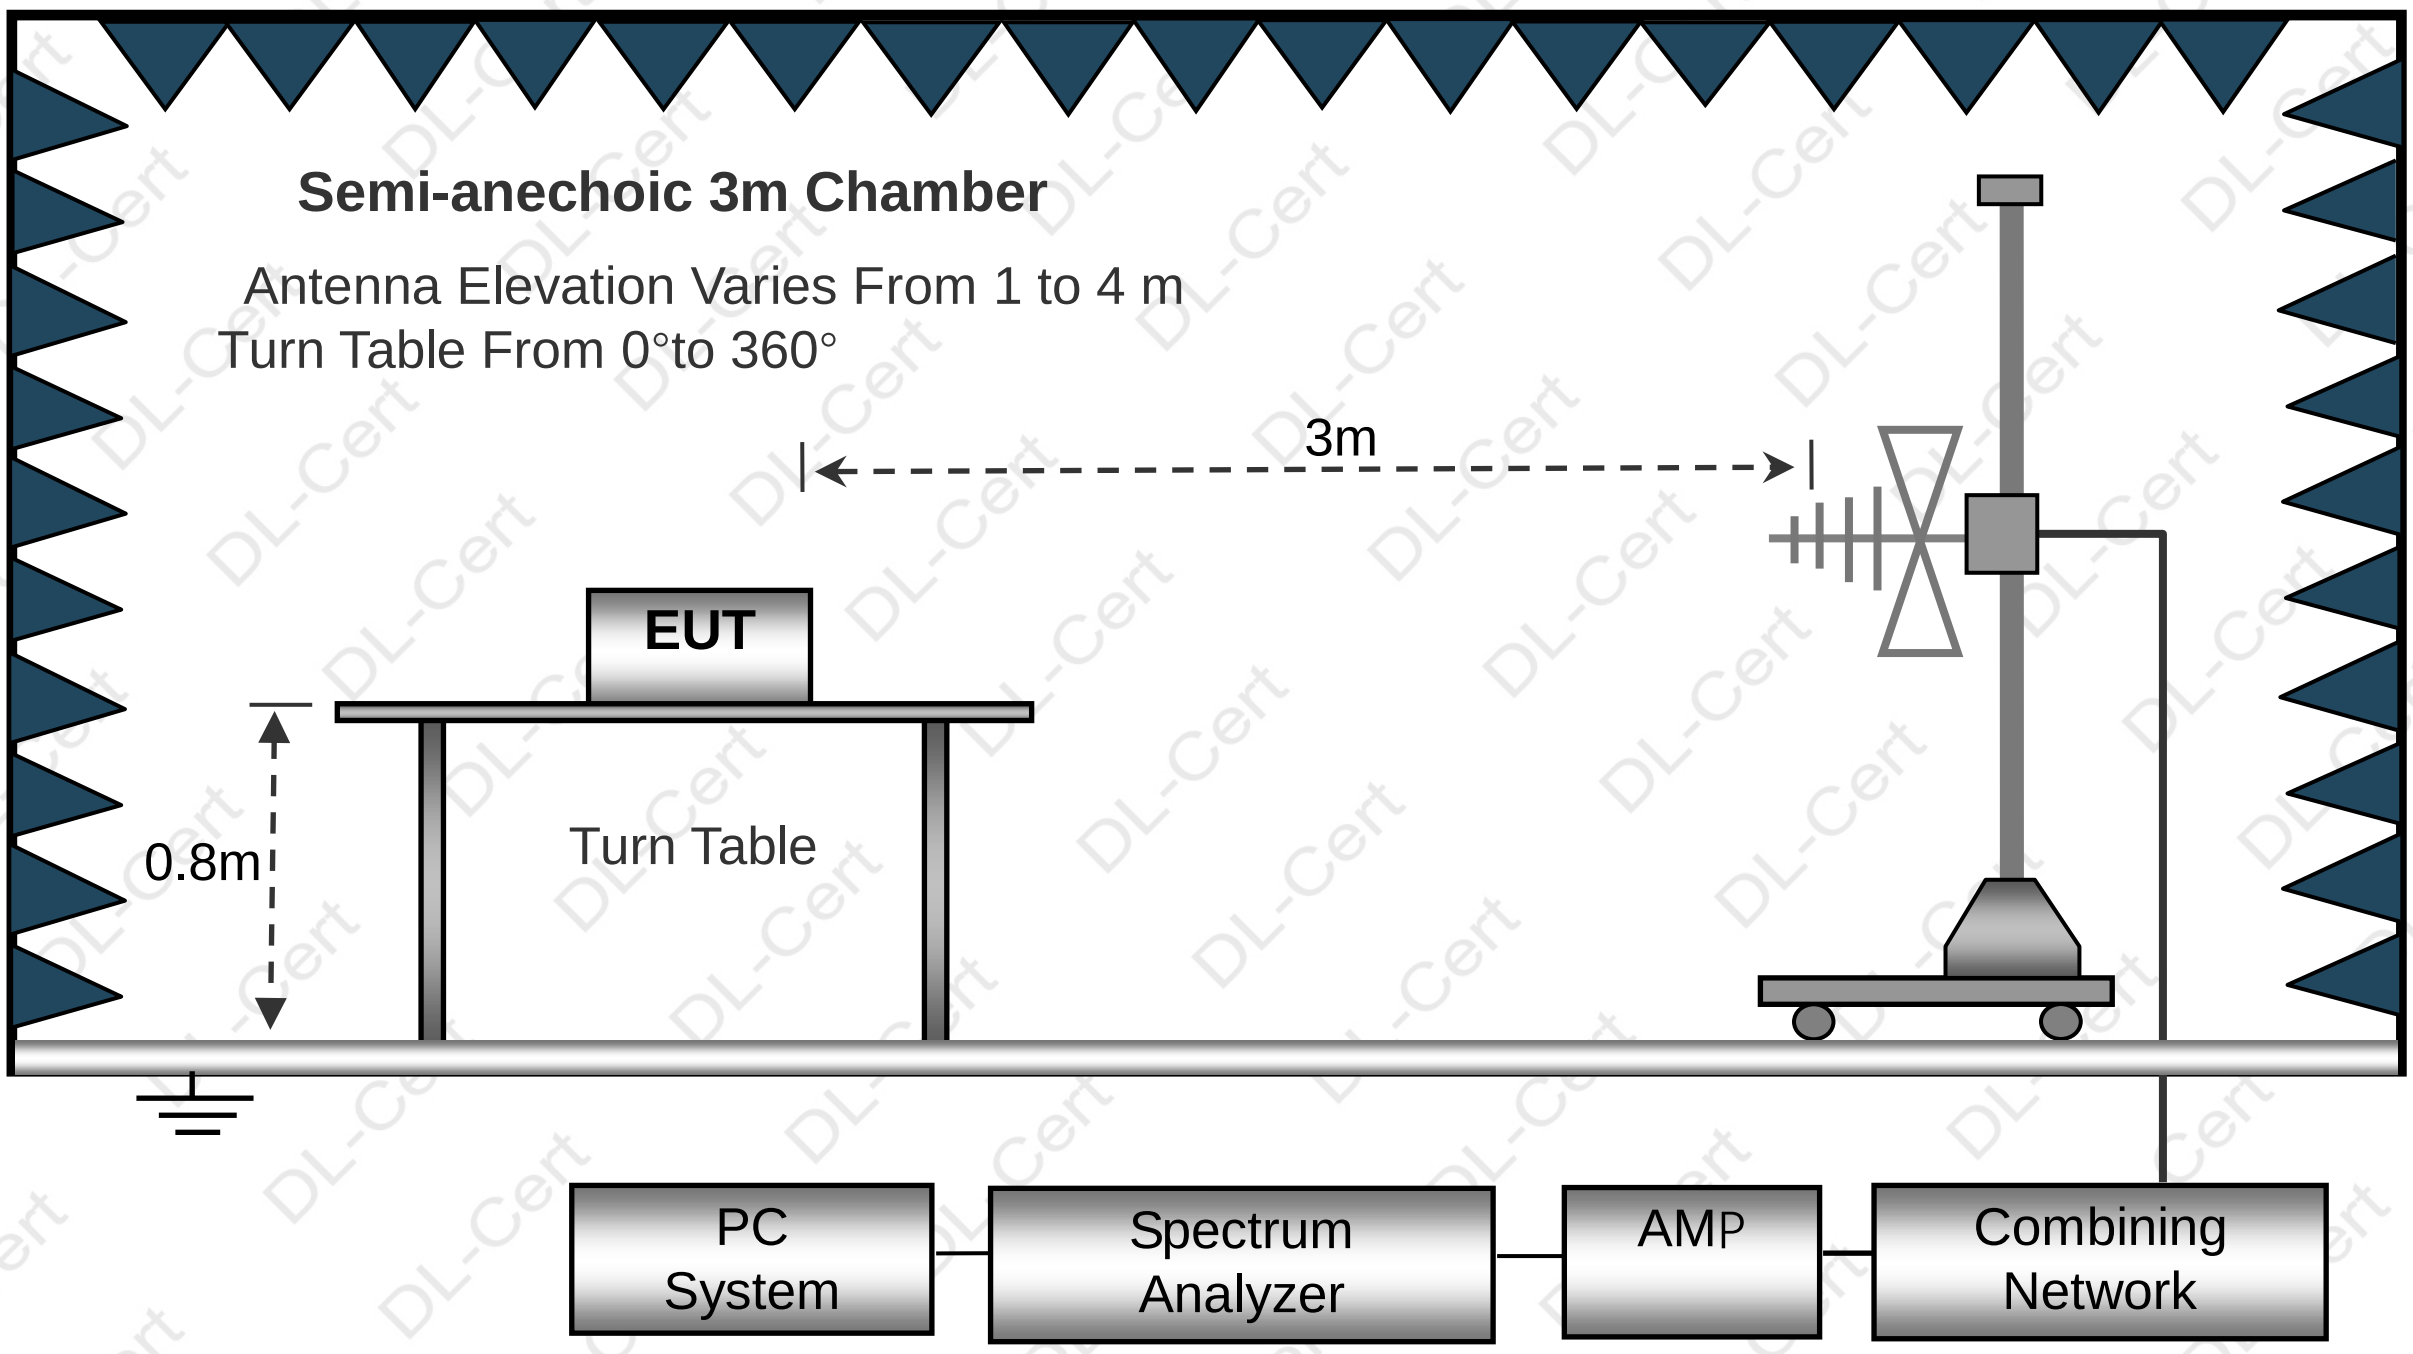

Above 1GHz

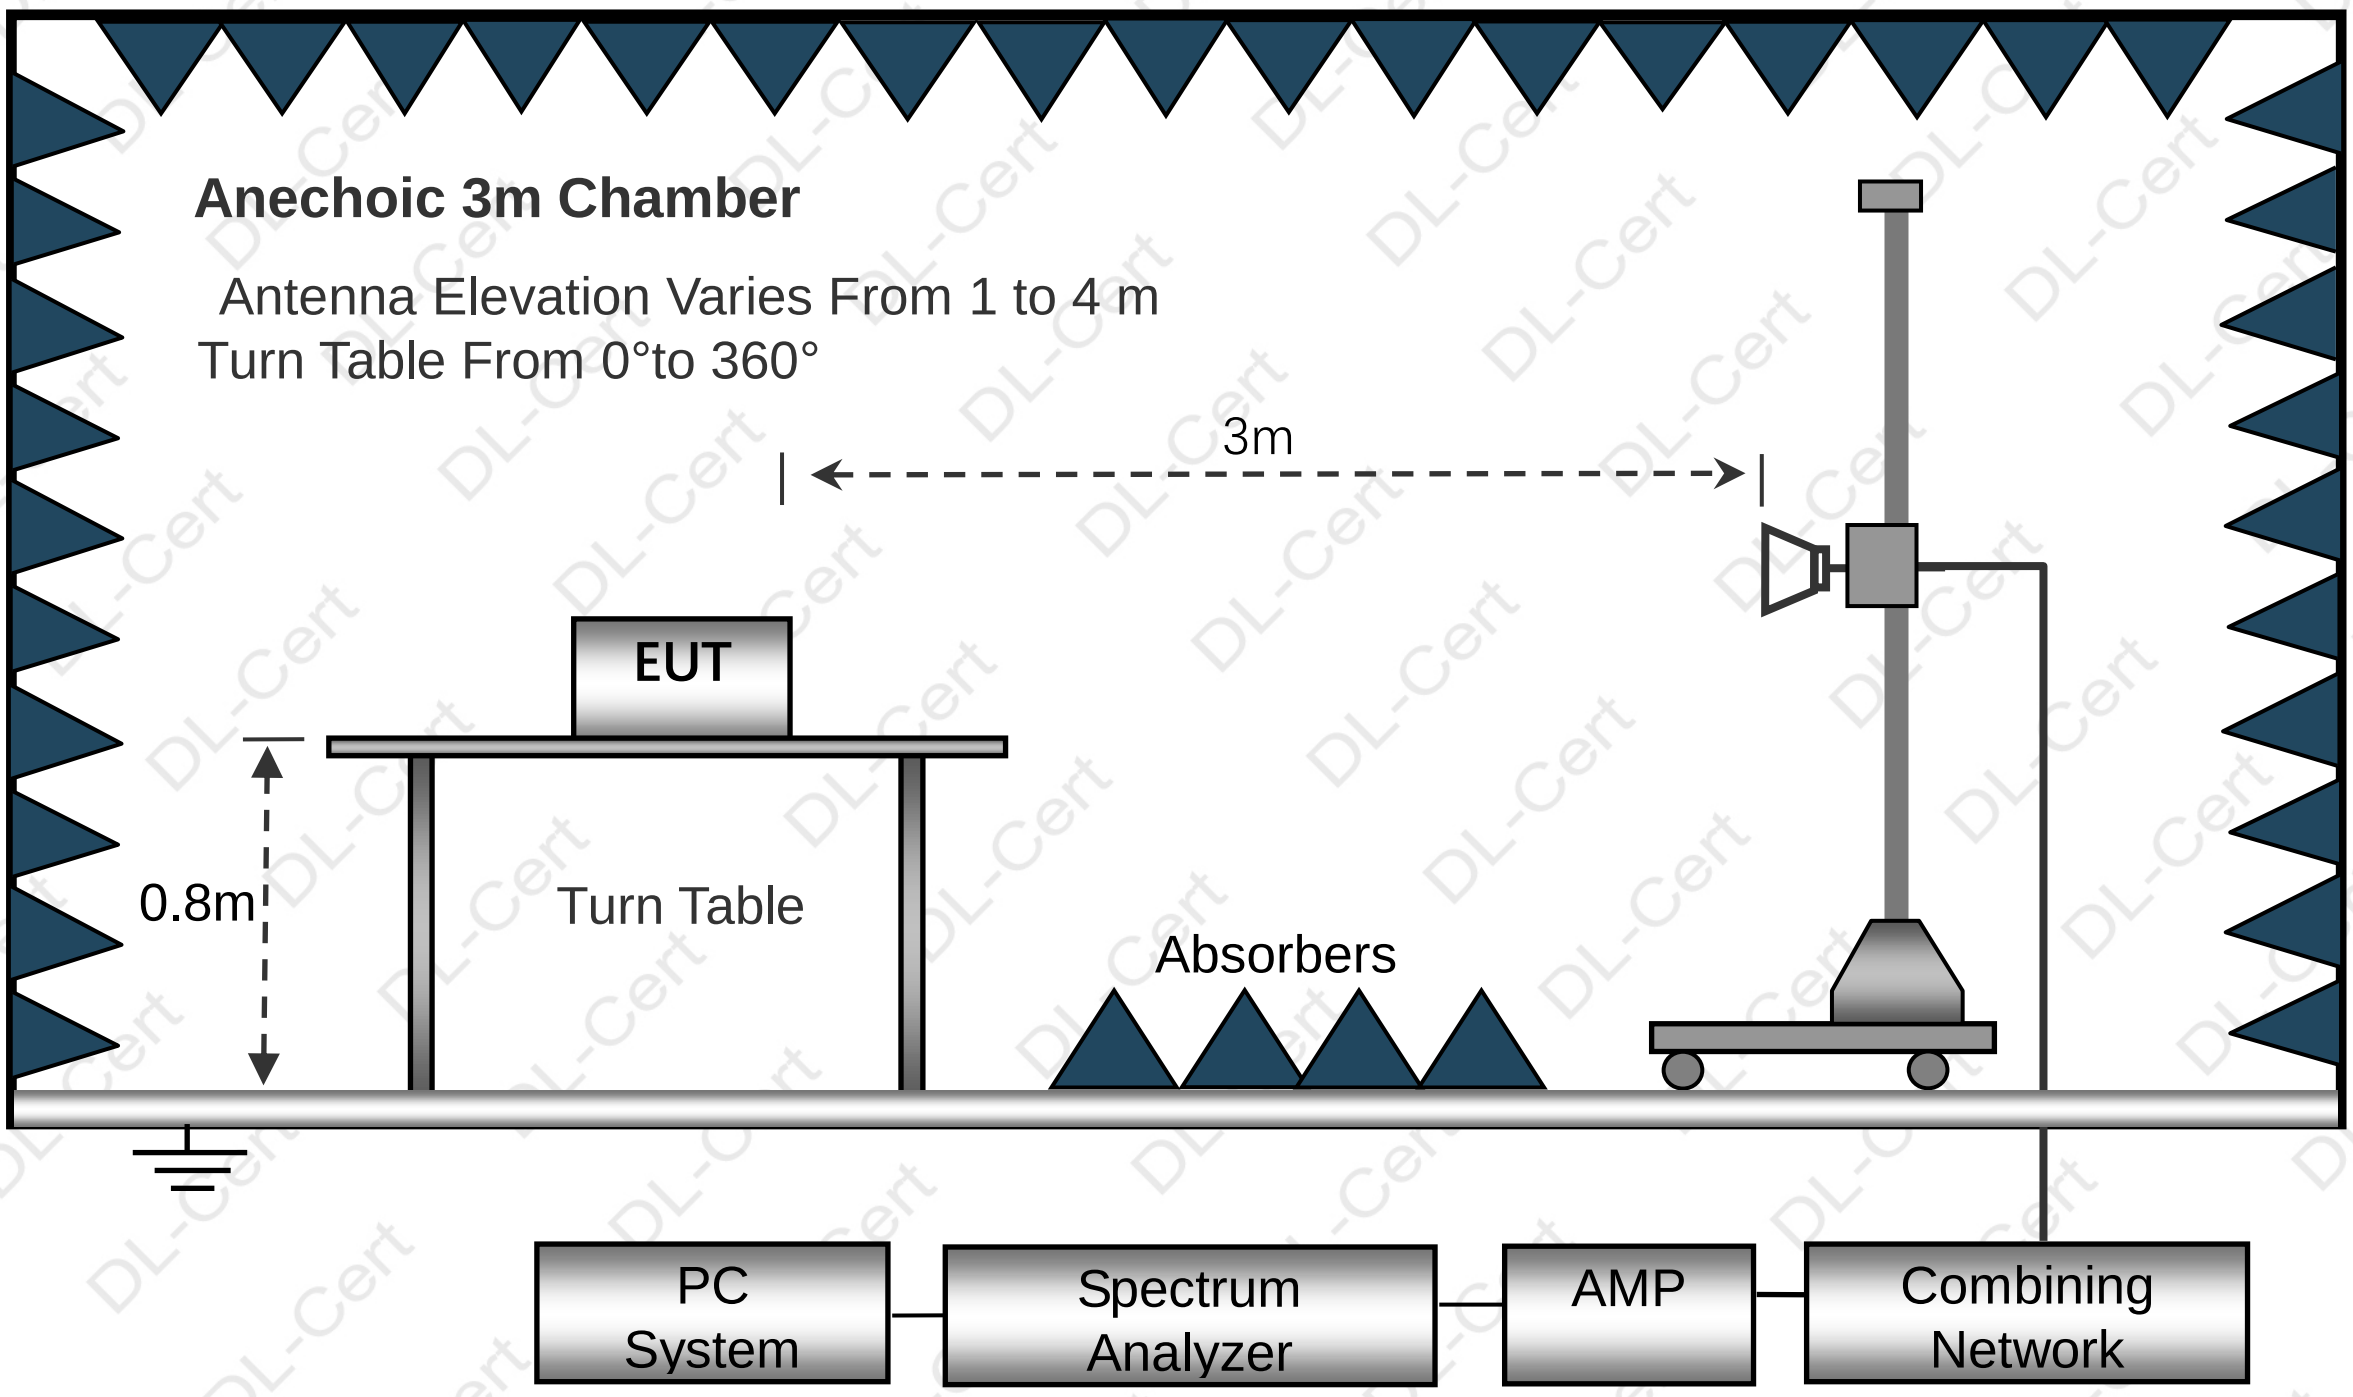

6.2 Test Standard and Limit

J55032

Below 1GHz

Frequency MHz	Distance (Meters)	Limit values dB(μV/m) Quasi-peak
30 to 230	3	40
230 to 1 000		47

Above 1GHz

Frequency MHz	Distance (Meters)	Field Strengths Limits dB(μV)/m	Detector
1000～3000	3	70.0	PEAK
1000～3000	3	50.0	AVERAGE
3000～6000	3	74.0	PEAK
3000～6000	3	54.0	AVERAGE

Remark:

(1) The smaller limit shall apply at the cross point between two frequency bands.

(2) Distance refers to the distance in meters between the measuring instrument, antenna and the closed point of any part of the device or system.

6.3 EUT Configuration on Test

The J55032 regulations test method must be used to find the maximum emission during radiated emission test.

The configuration of EUT is the same as used in conducted emission test.

Please refer to Section 5.3.

6.4 Operating Condition of EUT

Same as conducted emission test, which is listed in Section 5.4 except the test set up replaced as Section 6.2.

6.5 Test Procedure

1) The radiated emissions test was conducted in a semi-anechoic chamber.

2) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.

3) Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT.

4) The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.

5) The bandwidth setting on the field strength meter (R&S Test Receiver ESCI) is set at 120KHz.

6) The frequency range from 30MHz to 1000MHz is checked.

6.6 Test Result

PASS

Please refer to the following page.

Radiation Emission Test Data (Below 1GHz)			
Temperature:	24.5 ℃	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Horizontal
Test Voltage:	AC 100V/50Hz	Test Mode:	Mode 1

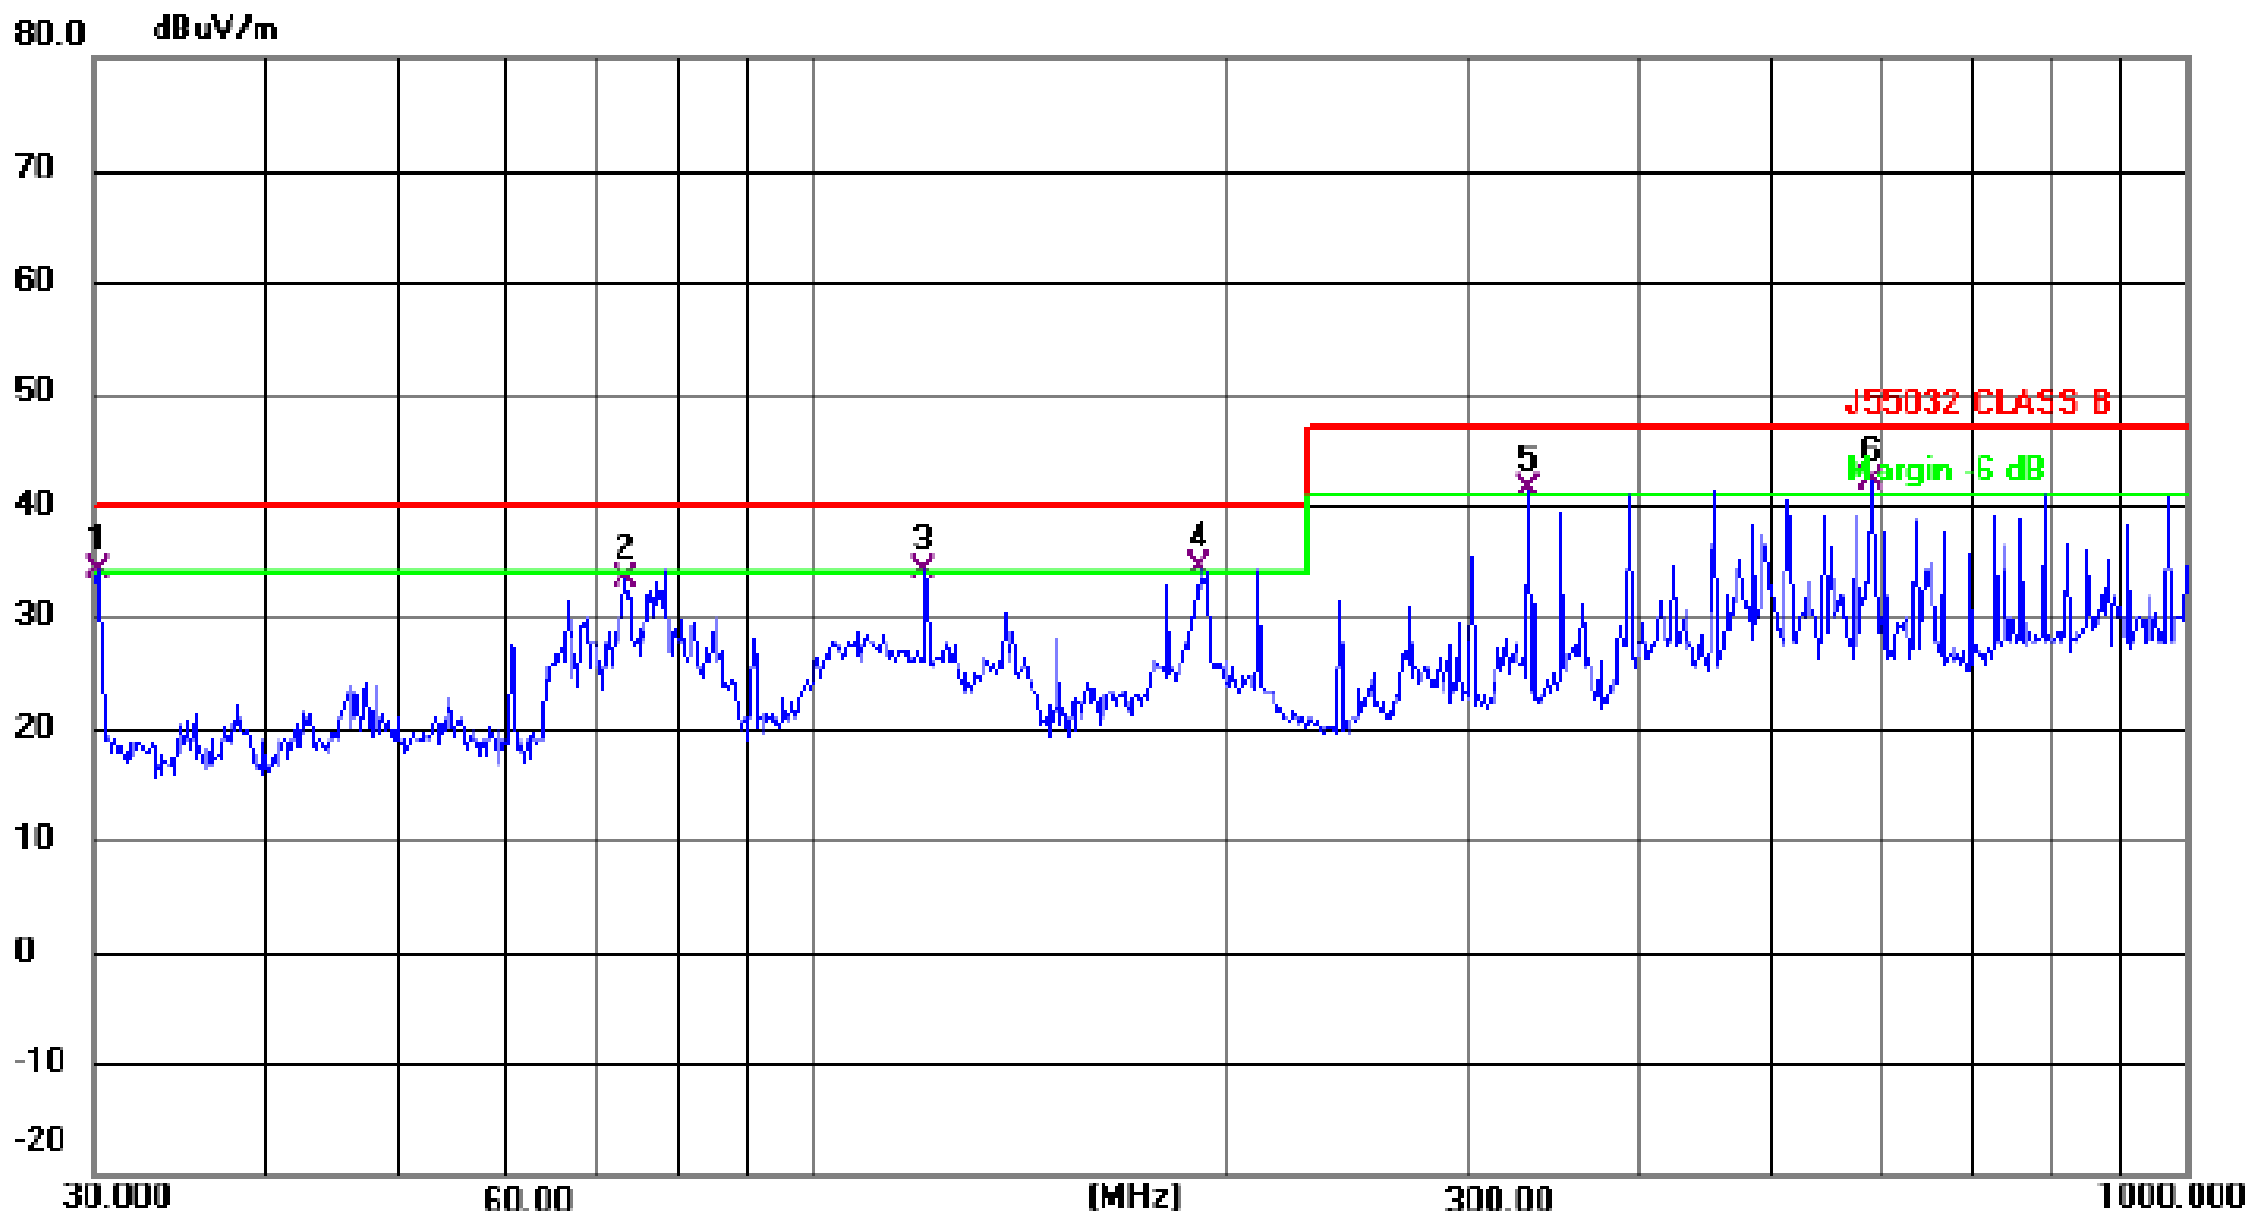

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1	!	30.2111	44.00	-9.85	34.15	40.00	-5.85	QP	
2		73.1025	45.52	-12.16	33.36	40.00	-6.64	QP	
3	!	120.6991	45.00	-10.79	34.21	40.00	-5.79	QP	
4	!	191.7450	43.90	-9.52	34.38	40.00	-5.62	QP	
5	!	332.5187	46.75	-5.46	41.29	47.00	-5.71	QP	
6	*	590.9737	41.58	0.60	42.18	47.00	-4.82	QP	

Remark:

Correct Factor=Cable loss+Antenna factor-Preamplifier

Measurement Level = Reading Level + Correct Factor; Margin = Measurement Level- Limit;

Radiation Emission Test Data (Below 1GHz)			
Temperature:	24.5 ℃	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Vertical
Test Voltage:	AC 100V/50Hz	Test Mode:	Mode 1

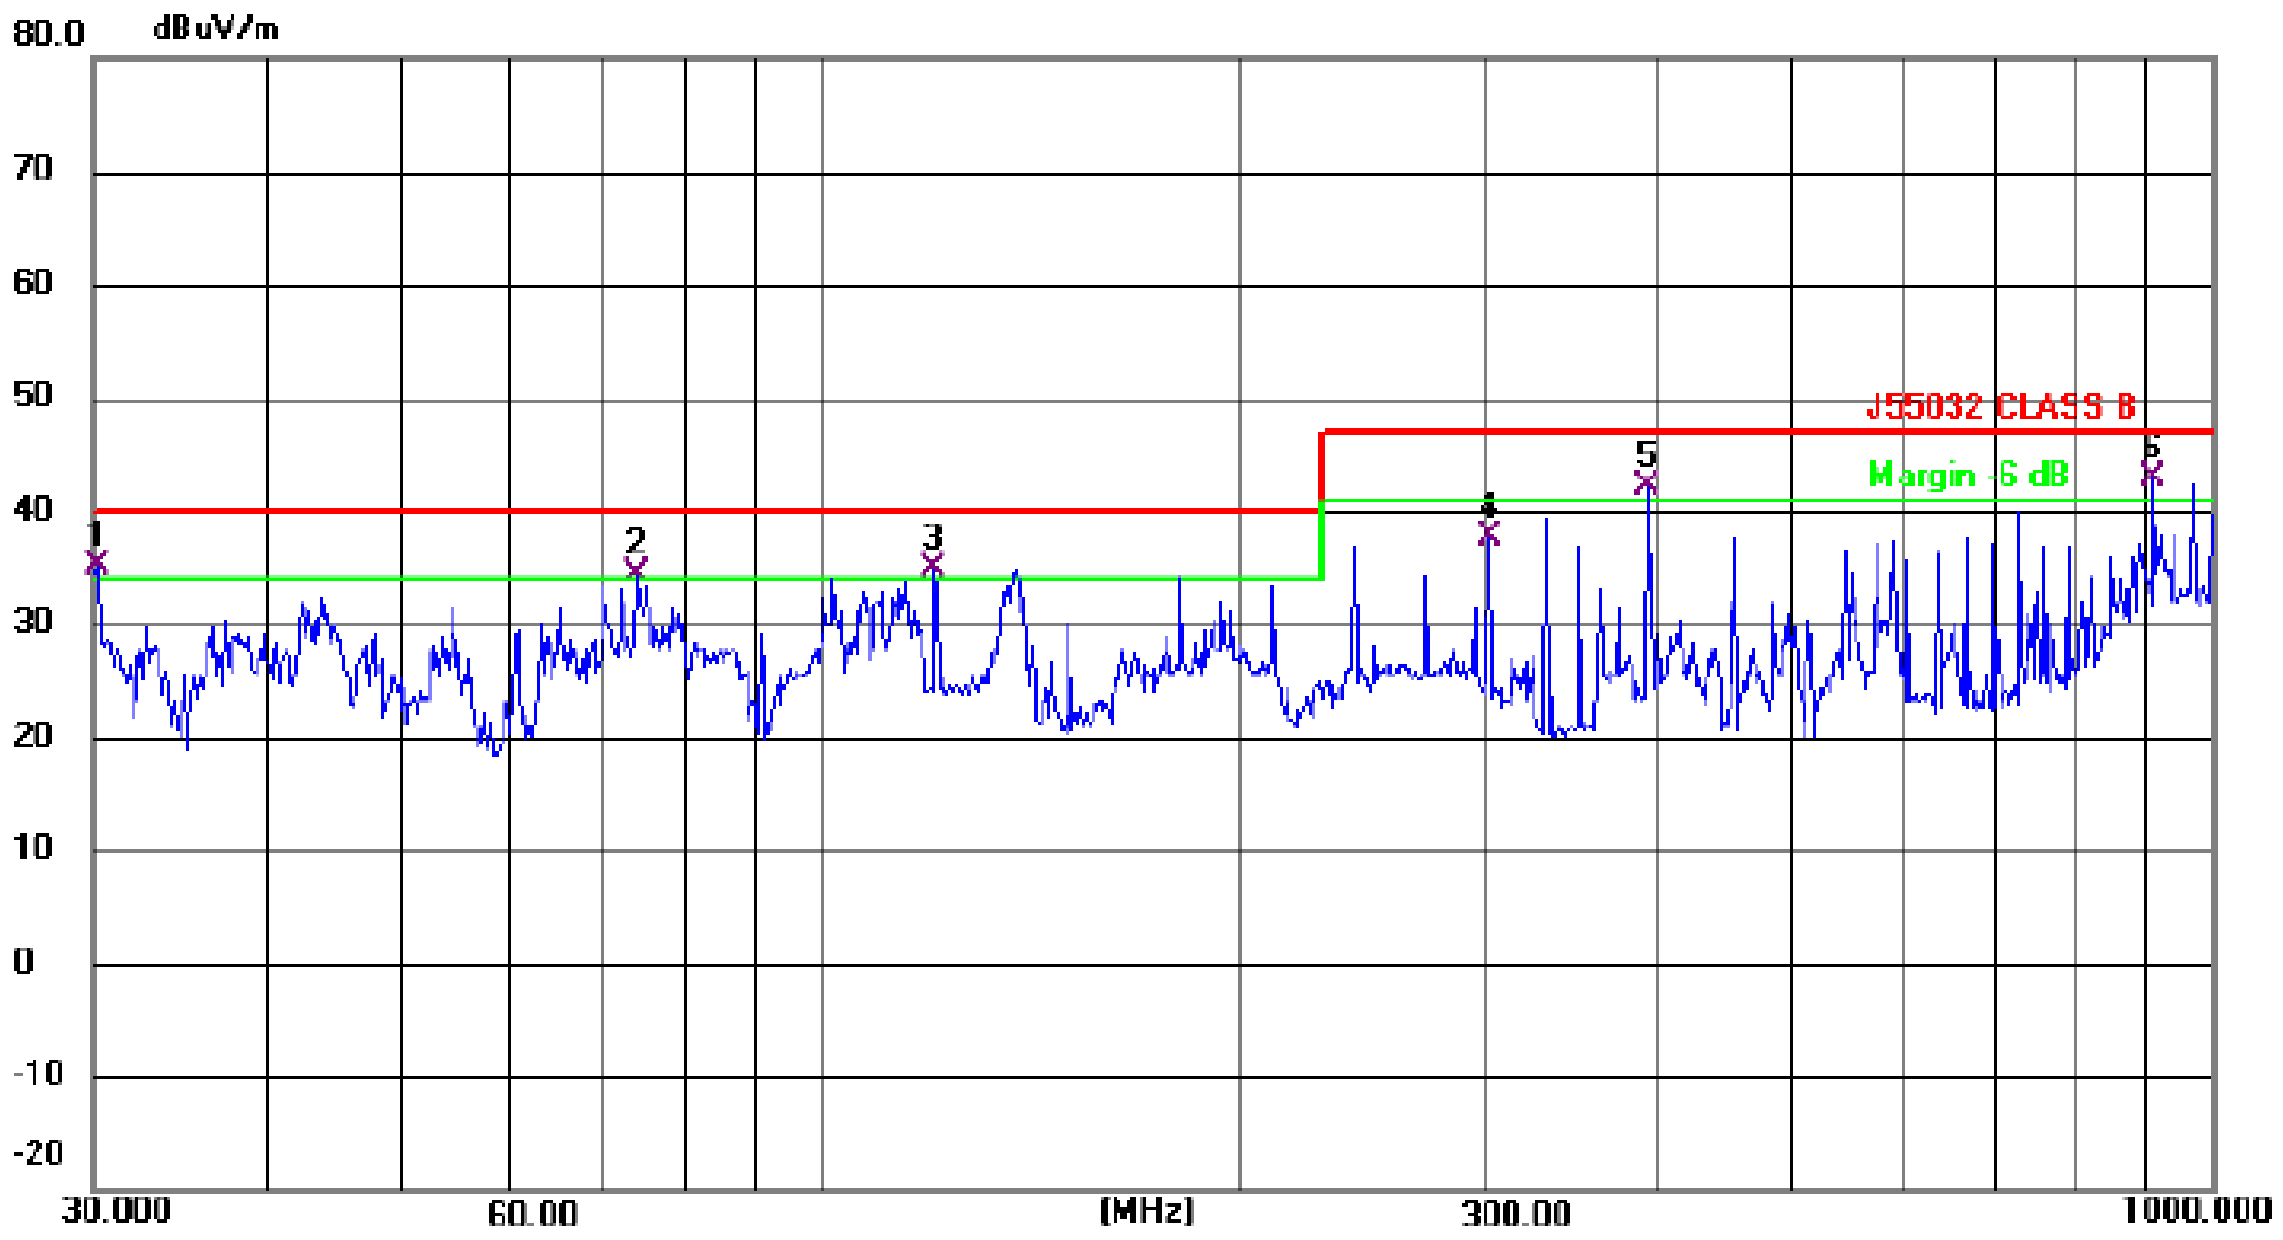

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1	!	30.2111	45.08	-9.85	35.23	40.00	-4.77	QP	
2	!	73.8756	46.45	-12.08	34.37	40.00	-5.63	QP	
3	!	120.6991	45.73	-10.79	34.94	40.00	-5.06	QP	
4		302.4811	43.59	-6.07	37.52	47.00	-9.48	QP	
5	!	393.4723	46.41	-4.24	42.17	47.00	-4.83	QP	
6	*	909.6666	37.54	5.39	42.93	47.00	-4.07	QP	

Remark:
Correct Factor=Cable loss+Antenna factor-Preamplifier
Measurement Level = Reading Level + Correct Factor; Margin = Measurement Level- Limit;

Radiation Emission Test Data (Above 1GHz)			
Temperature:	24.5 ℃	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Horizontal
Test Voltage:	AC 100V/50Hz	Test Mode:	Mode 1

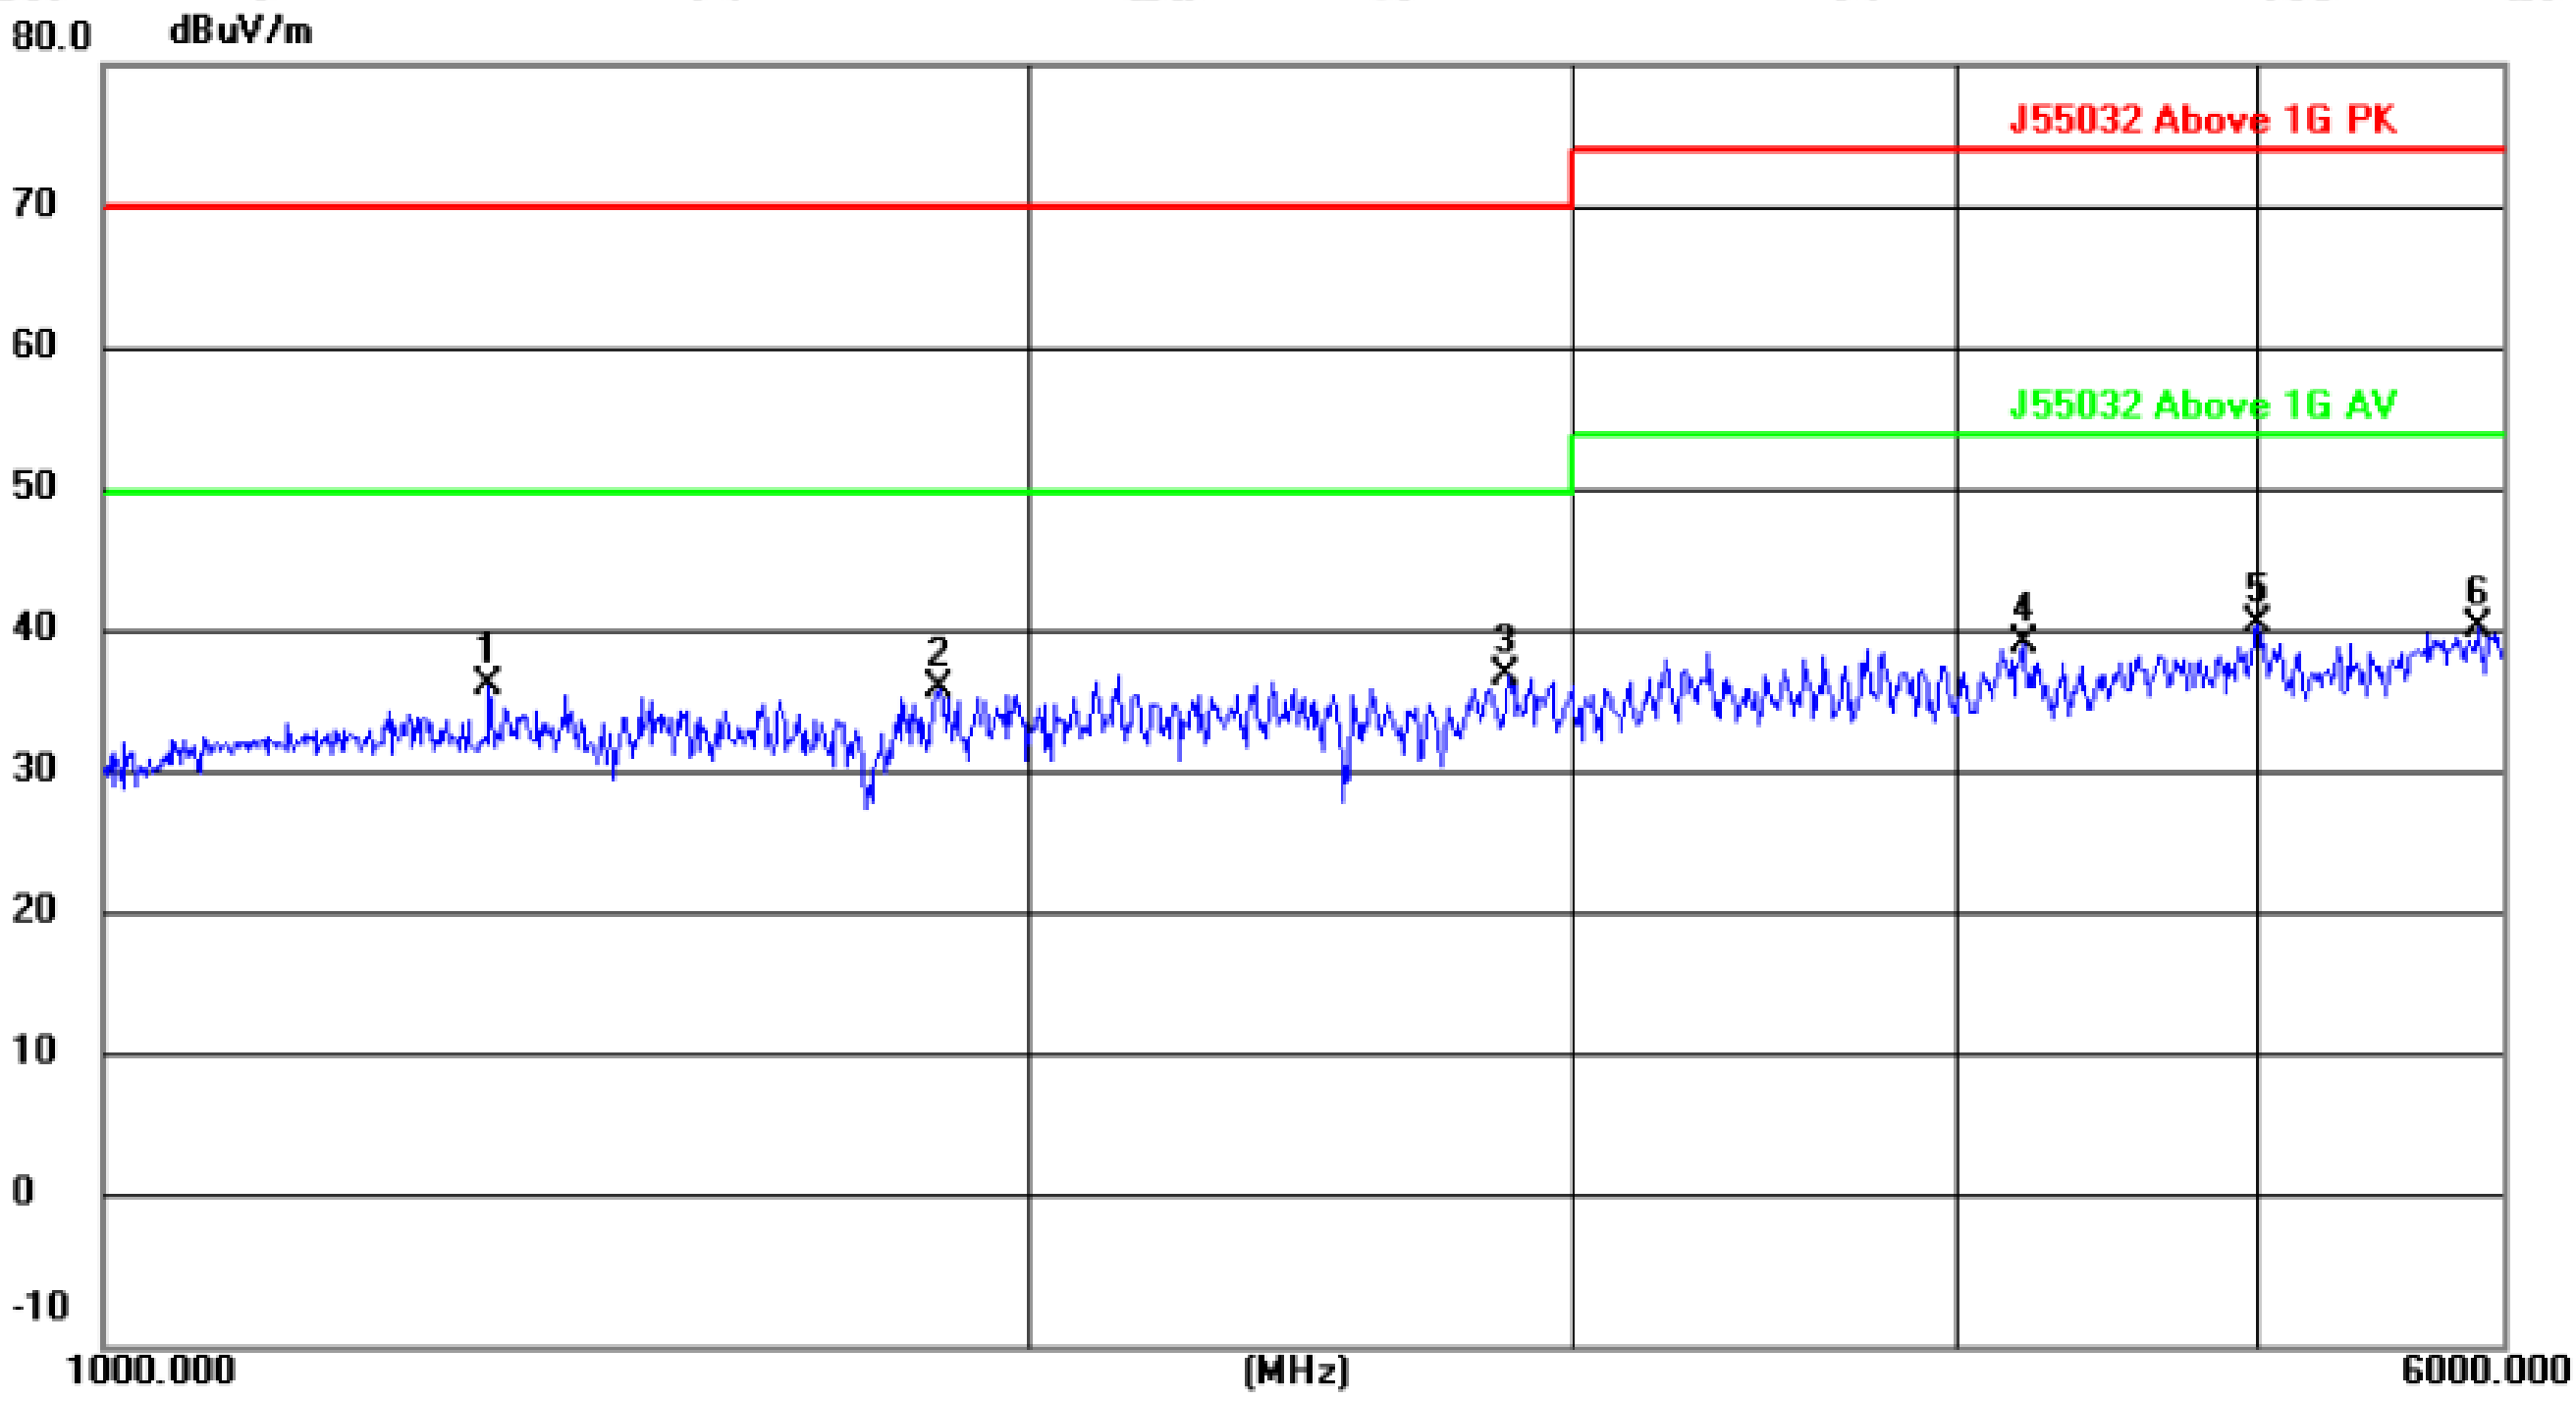

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		1334.389	56.14	-19.64	36.50	70.00	-33.50	peak
2		1865.506	53.01	-16.82	36.19	70.00	-33.81	peak
3	*	2857.568	51.61	-14.38	37.23	70.00	-32.77	peak
4		4192.963	47.80	-8.32	39.48	74.00	-34.52	peak
5		4997.811	44.45	-3.78	40.67	74.00	-33.33	peak
6		5893.452	42.51	-1.89	40.62	74.00	-33.38	peak

Remark:
Correct Factor=Cable loss+Antenna factor-Preamplifier
Measurement Level = Reading Level + Correct Factor; Margin = Measurement Level- Limit;

Radiation Emission Test Data (Above 1GHz)			
Temperature:	24.5 ℃	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Vertical
Test Voltage:	AC 100V/50Hz	Test Mode:	Mode 1

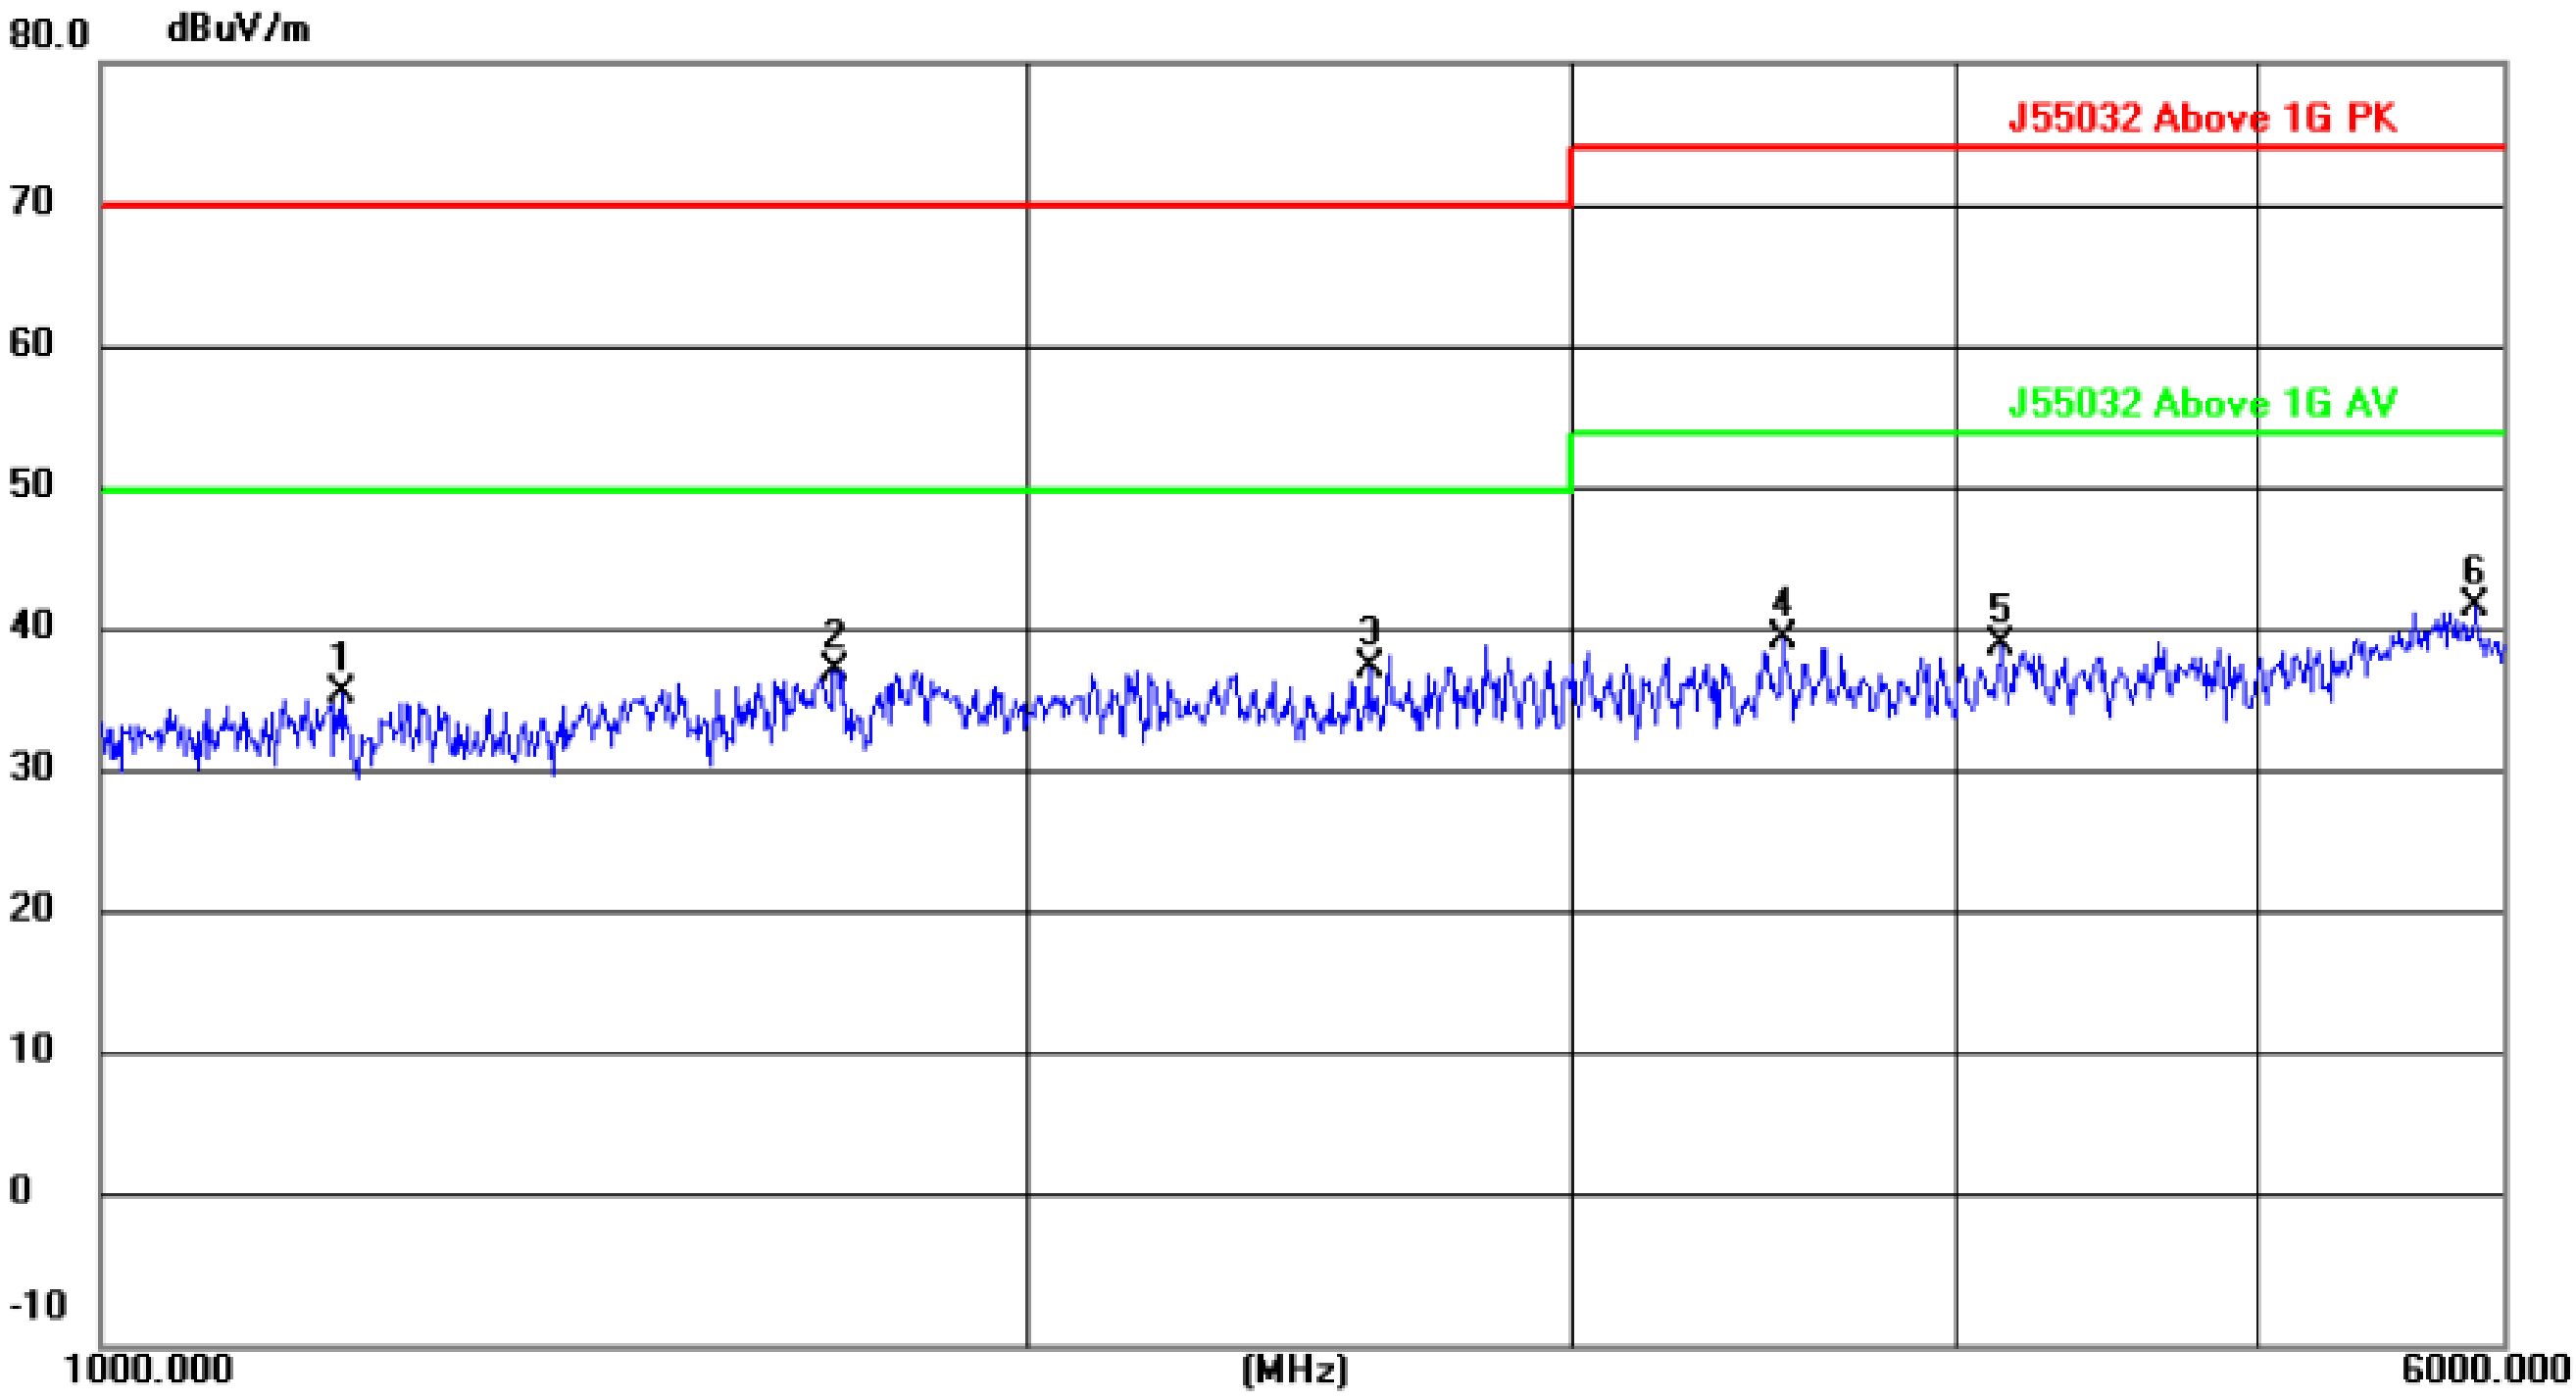

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		1196.231	55.71	-19.92	35.79	70.00	-34.21	peak
2		1730.272	55.29	-17.95	37.34	70.00	-32.66	peak
3		2575.514	54.35	-16.72	37.63	70.00	-32.37	peak
4		3505.144	50.41	-10.83	39.58	74.00	-34.42	peak
5		4125.890	47.55	-8.47	39.08	74.00	-34.92	peak
6	*	5882.902	43.73	-1.93	41.80	74.00	-32.20	peak

Remark:
Correct Factor=Cable loss+Antenna factor-Preamplifier
Measurement Level = Reading Level + Correct Factor; Margin = Measurement Level- Limit;

7. SETUP PHOTOGRAPHS

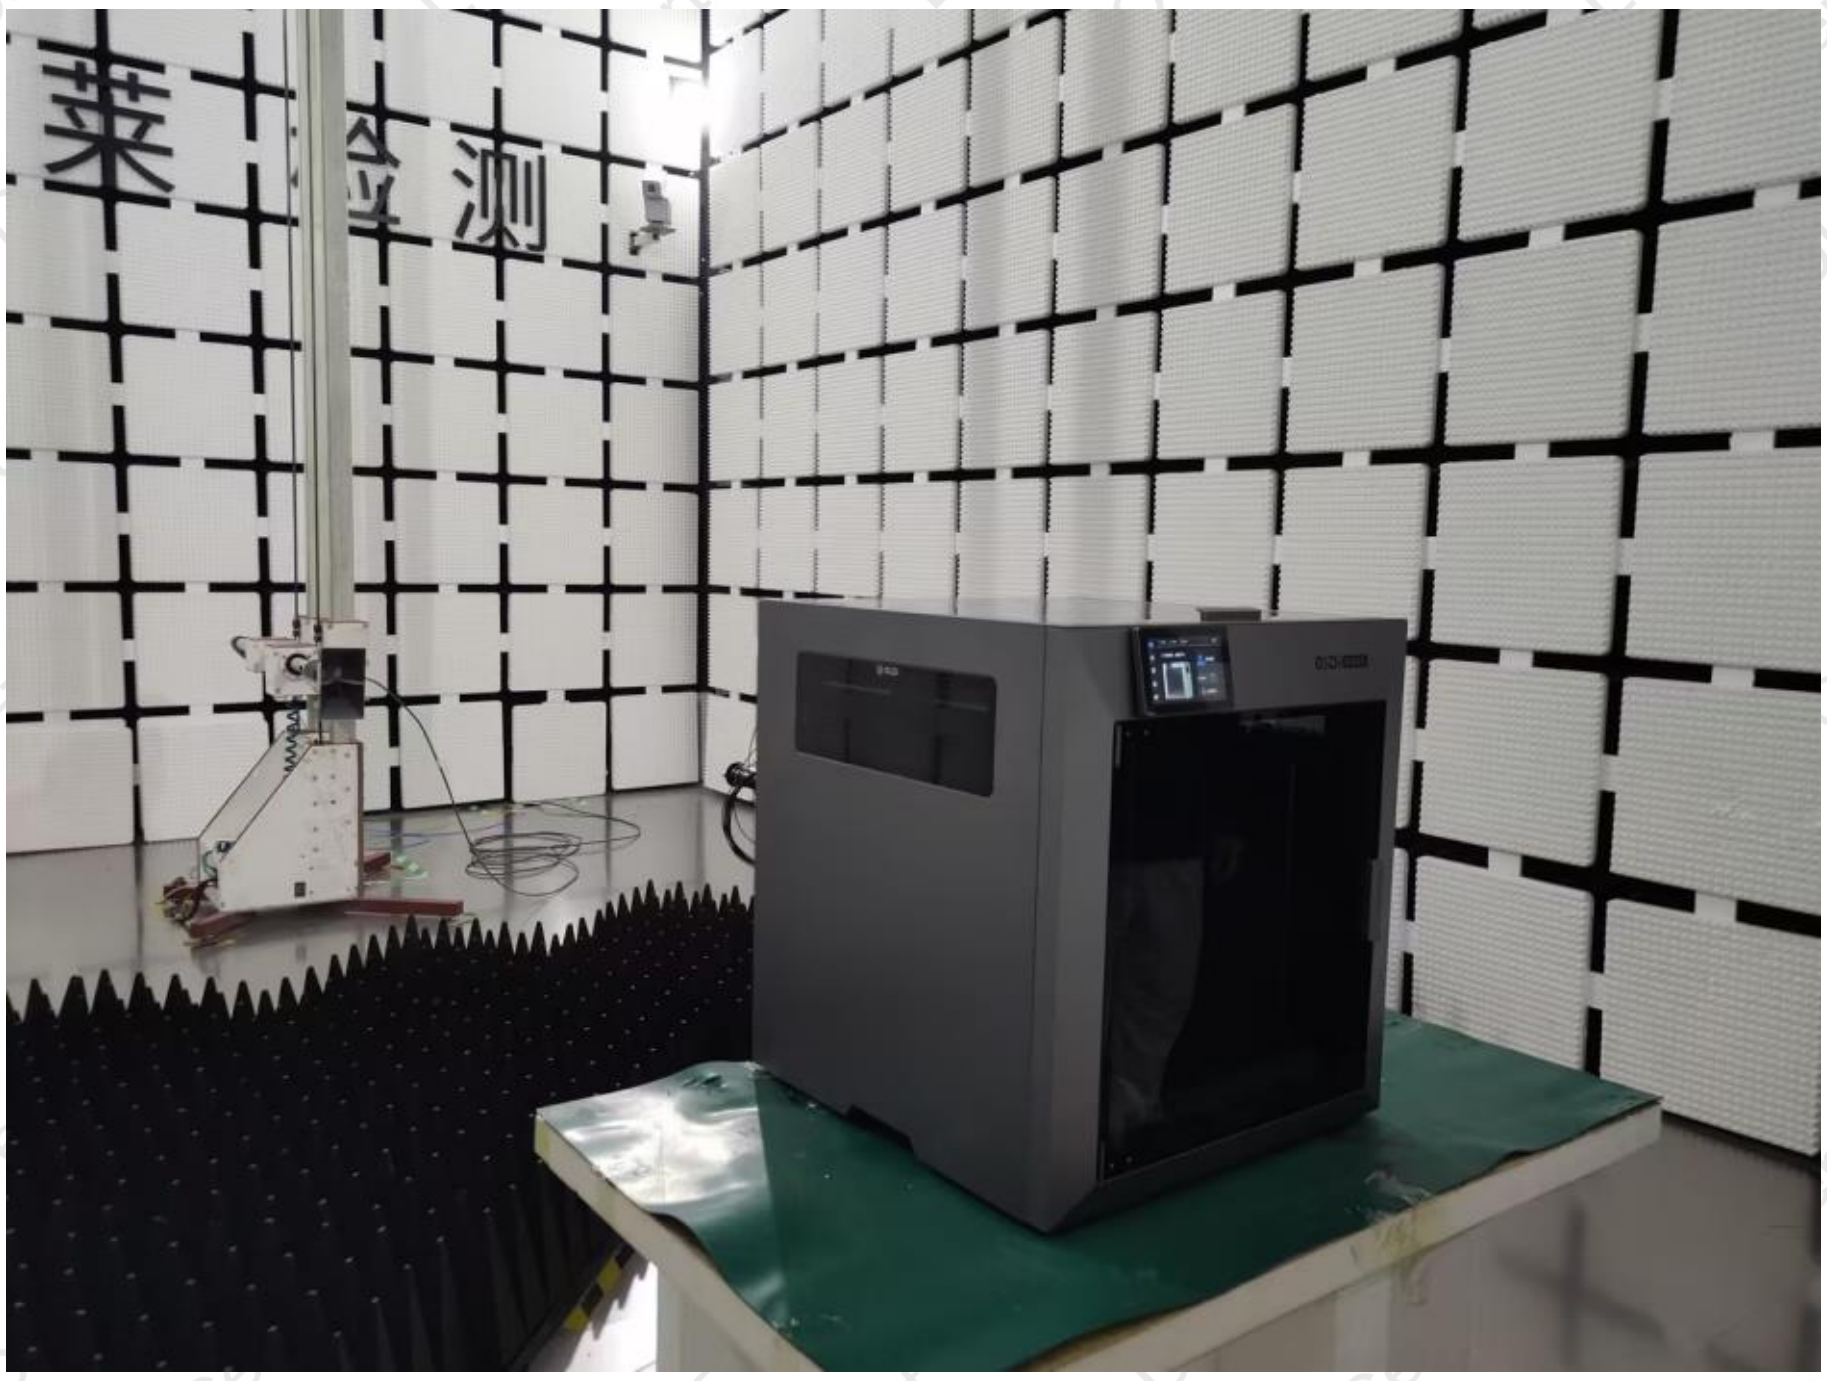

8. EUT PHOTOGRAPHS

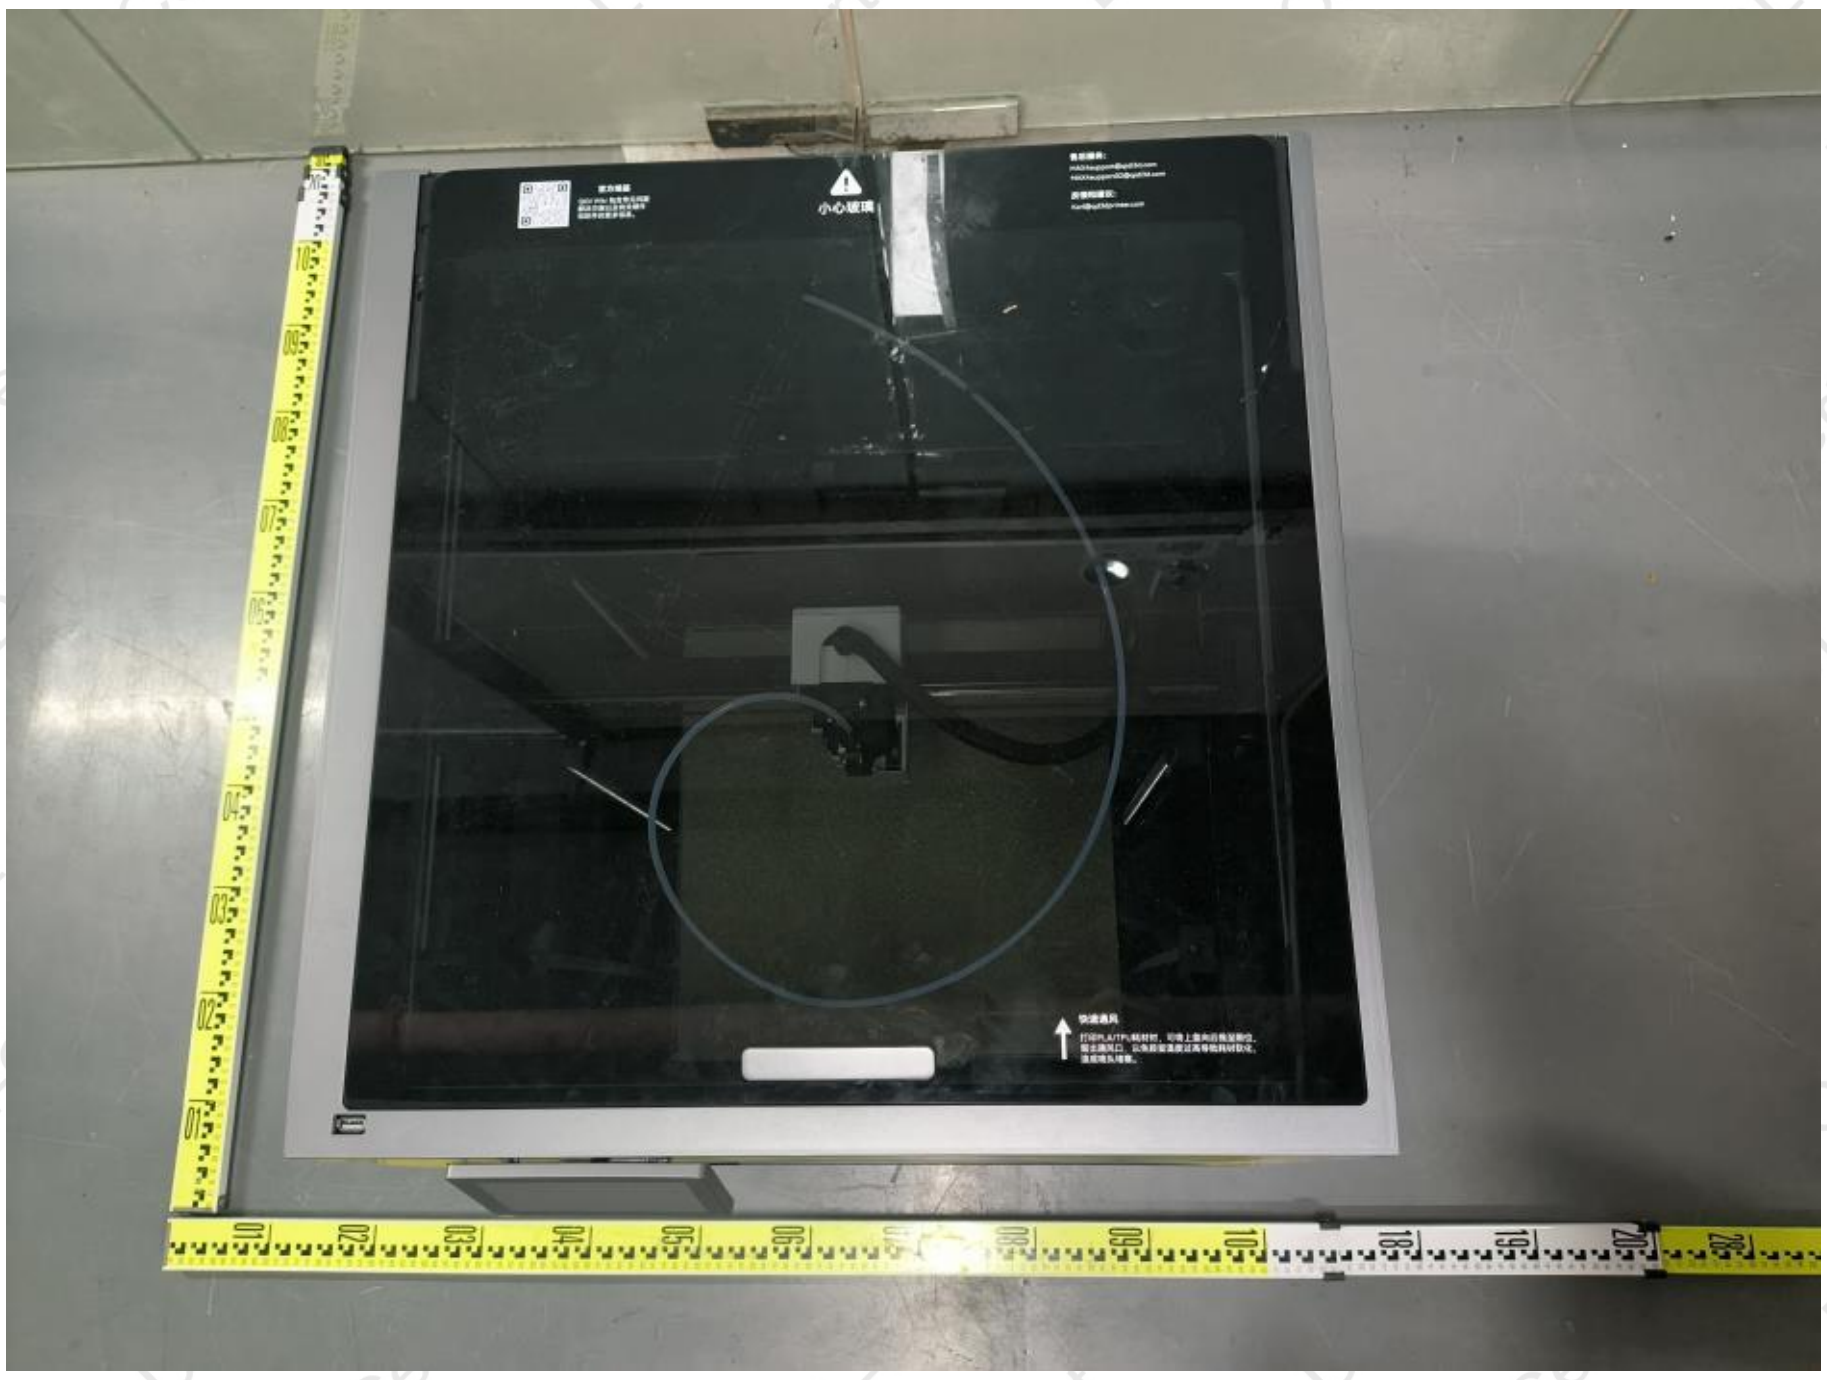


QiDi

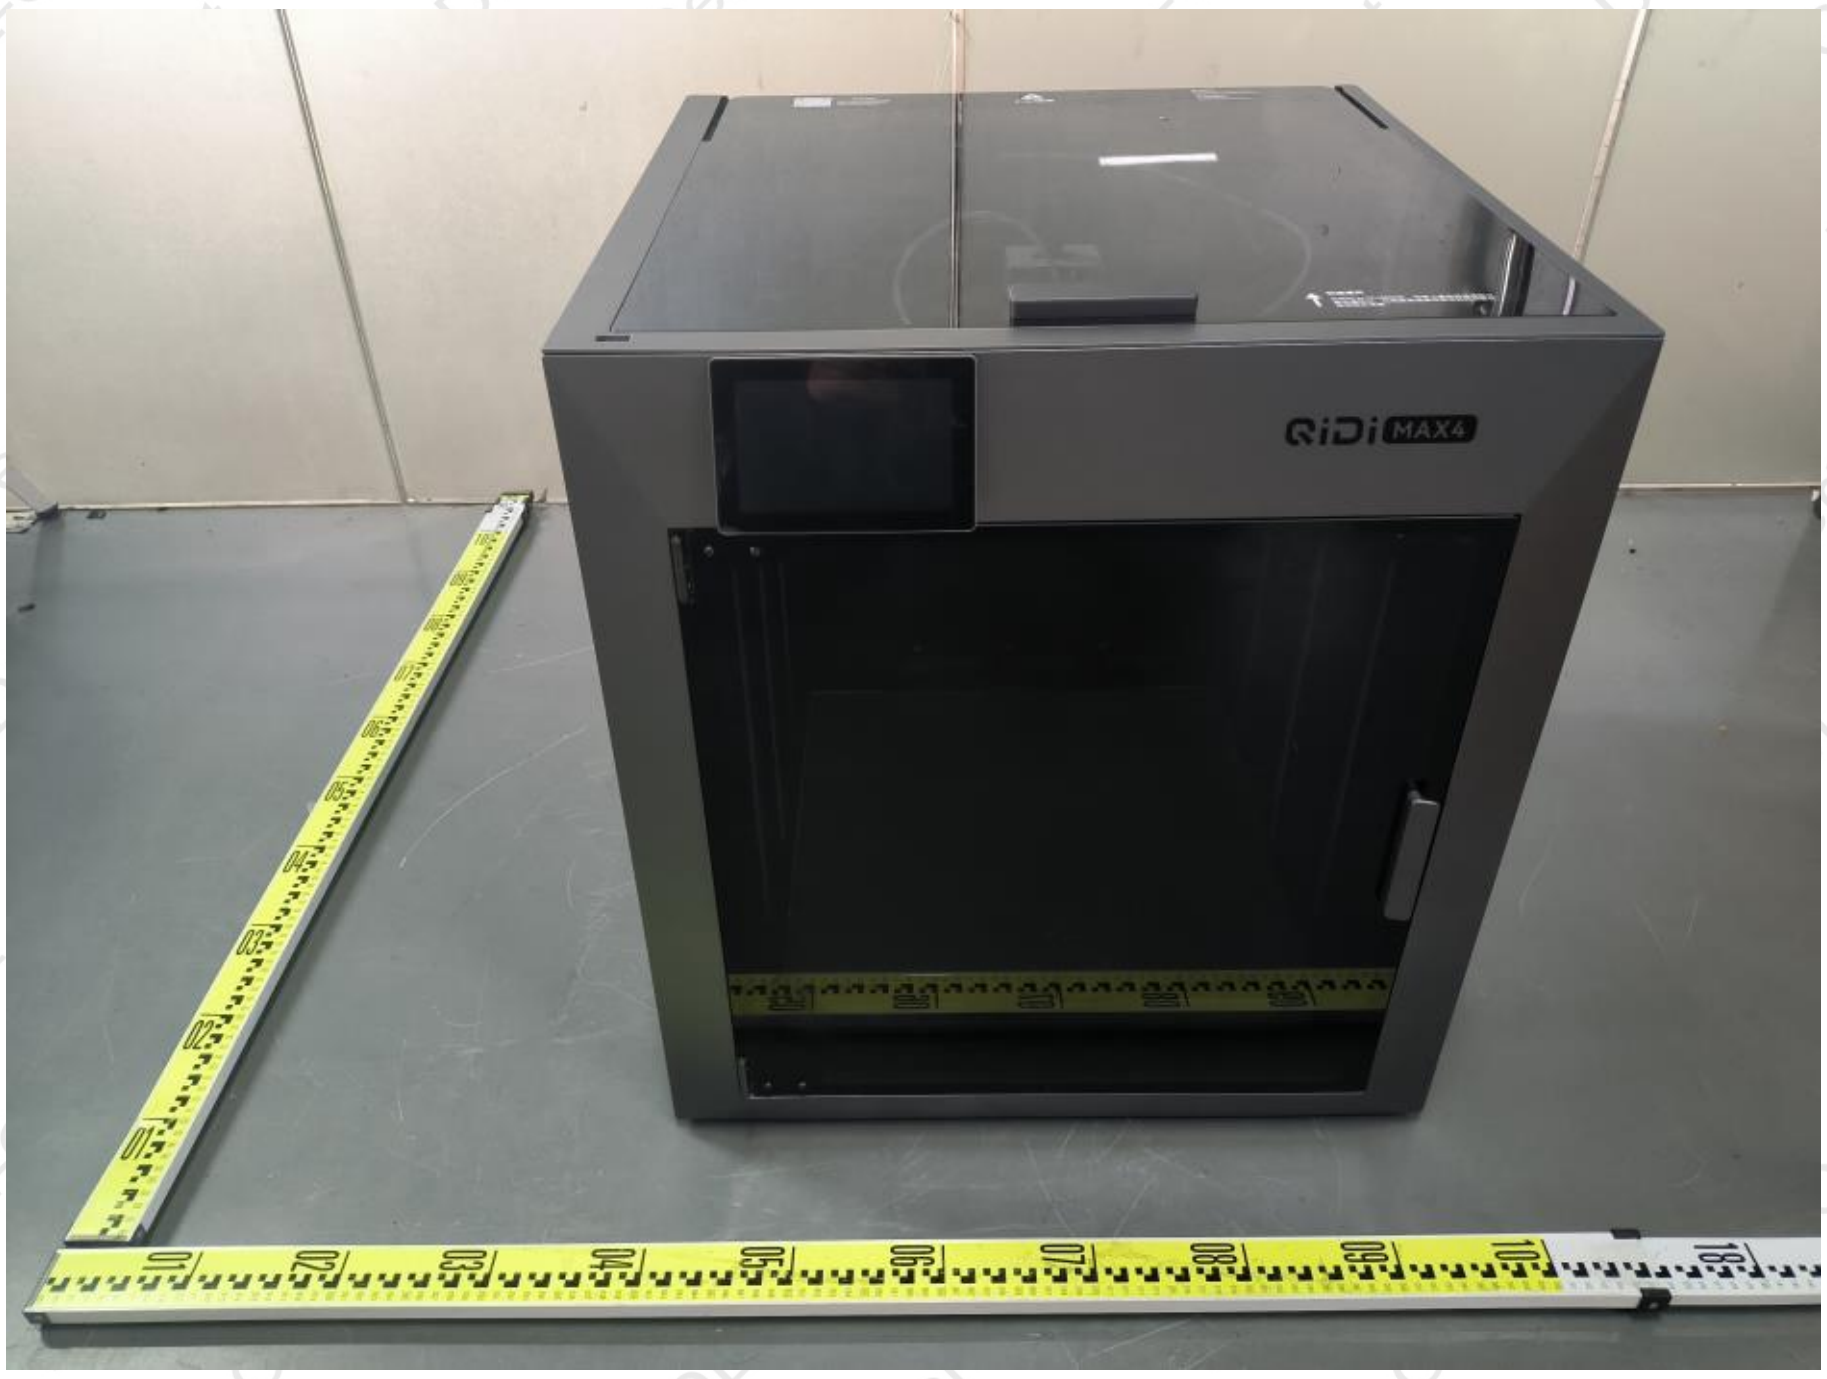
QiDi MAX4

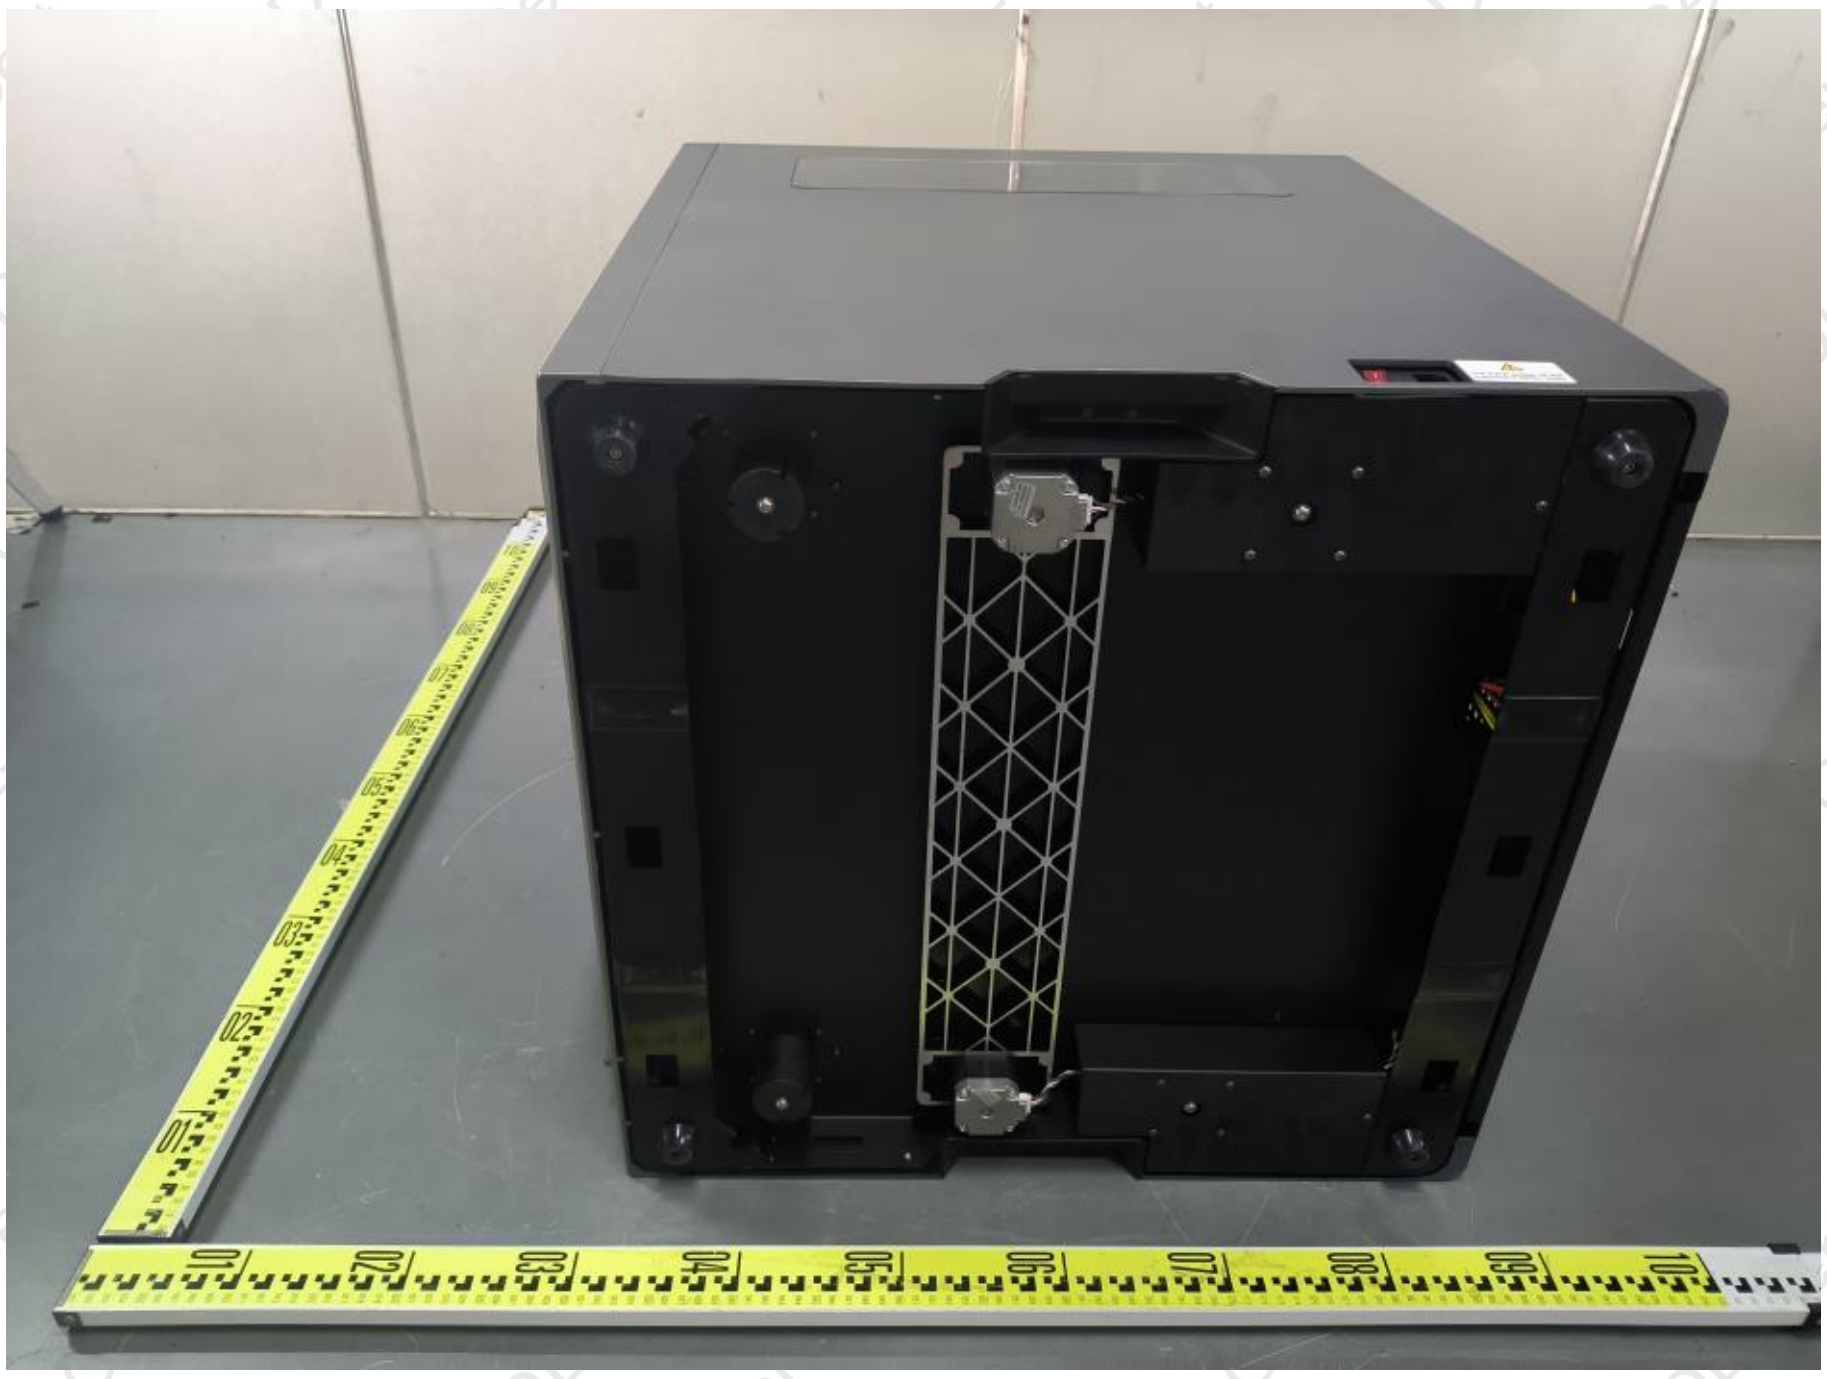

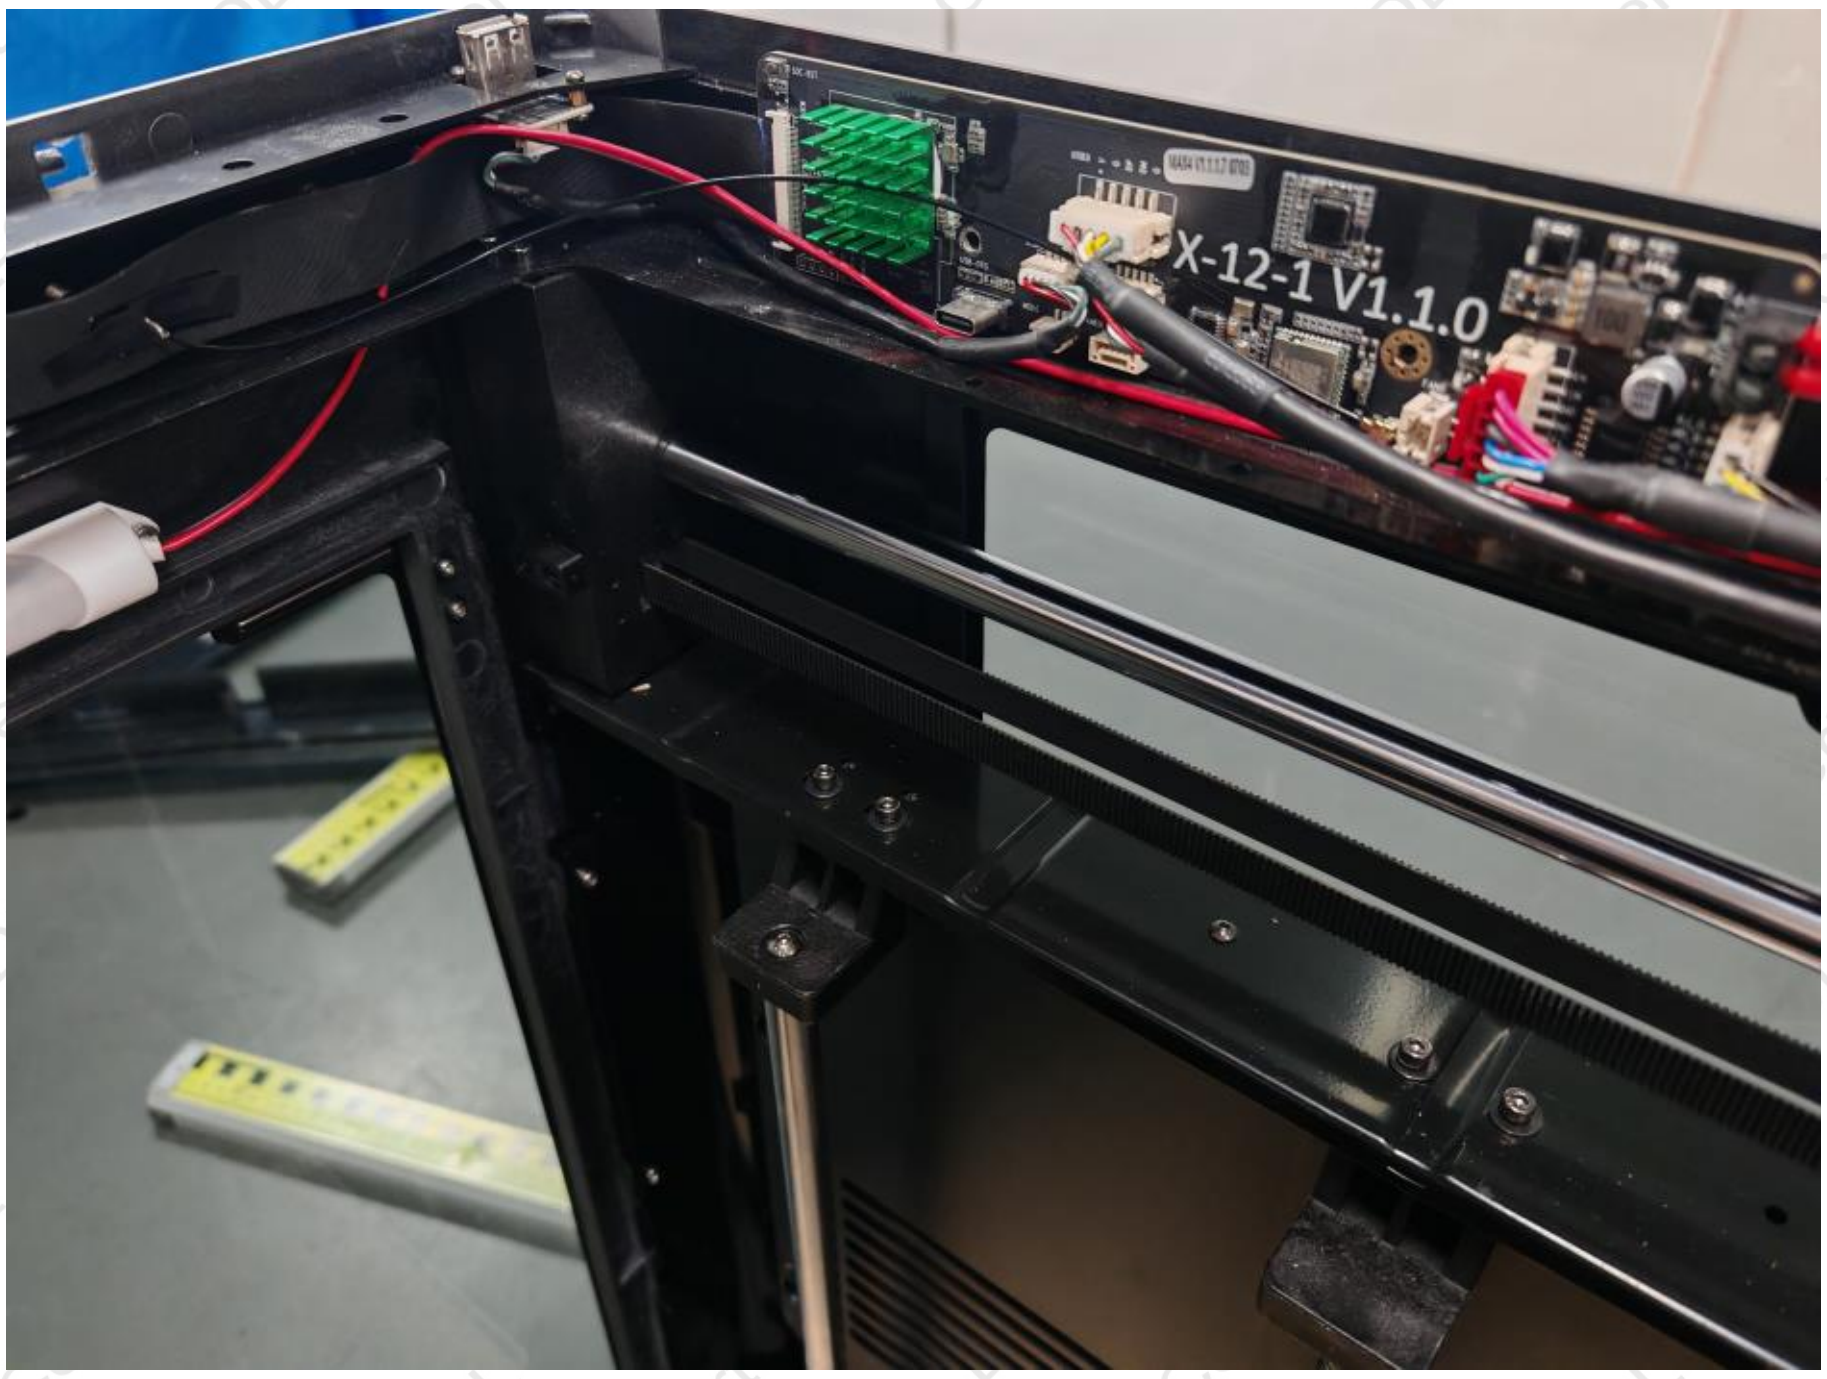
X-12-1 V1.1.0

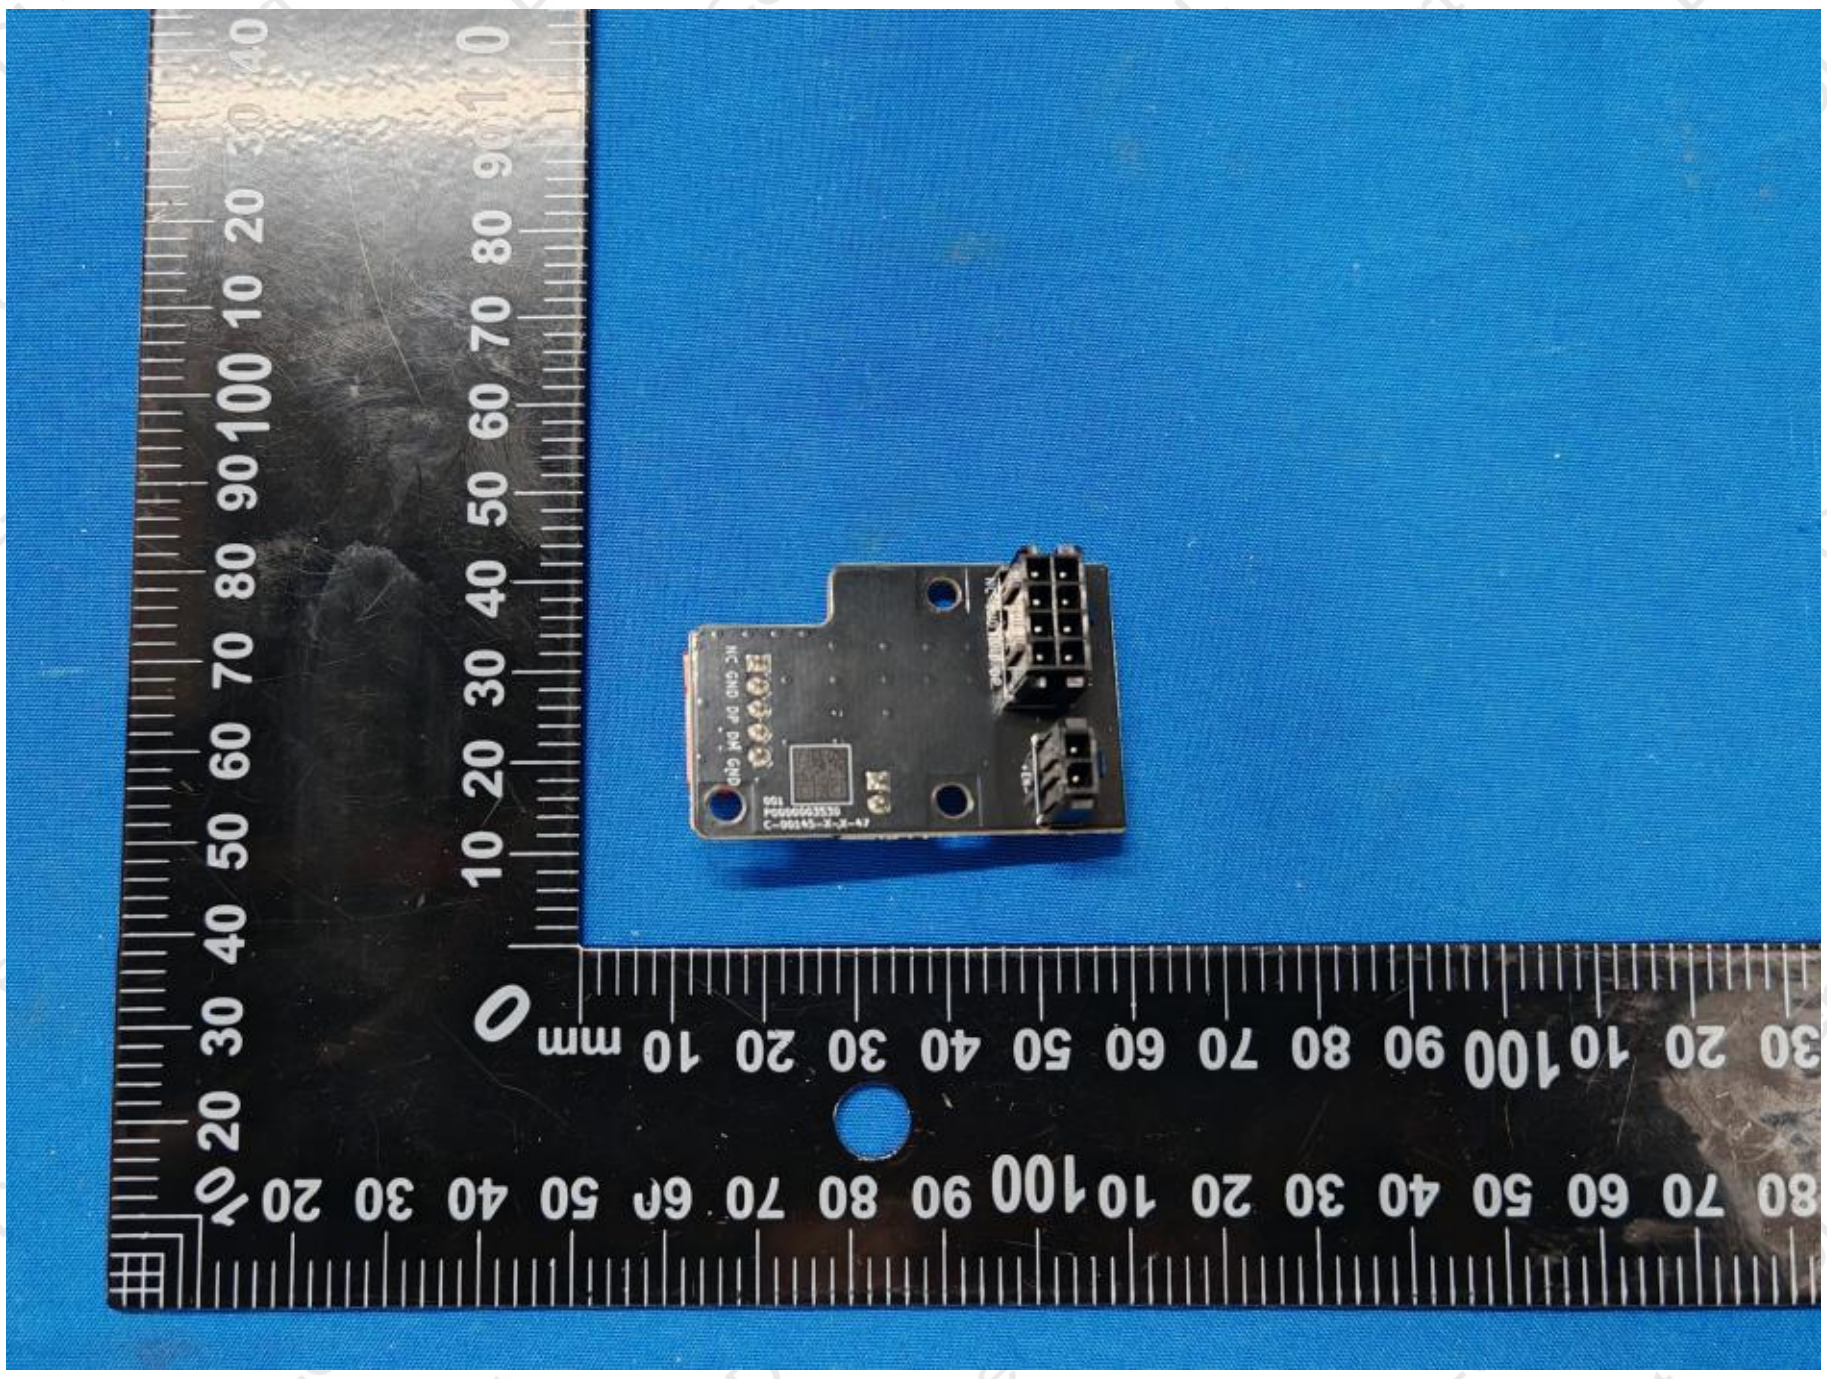

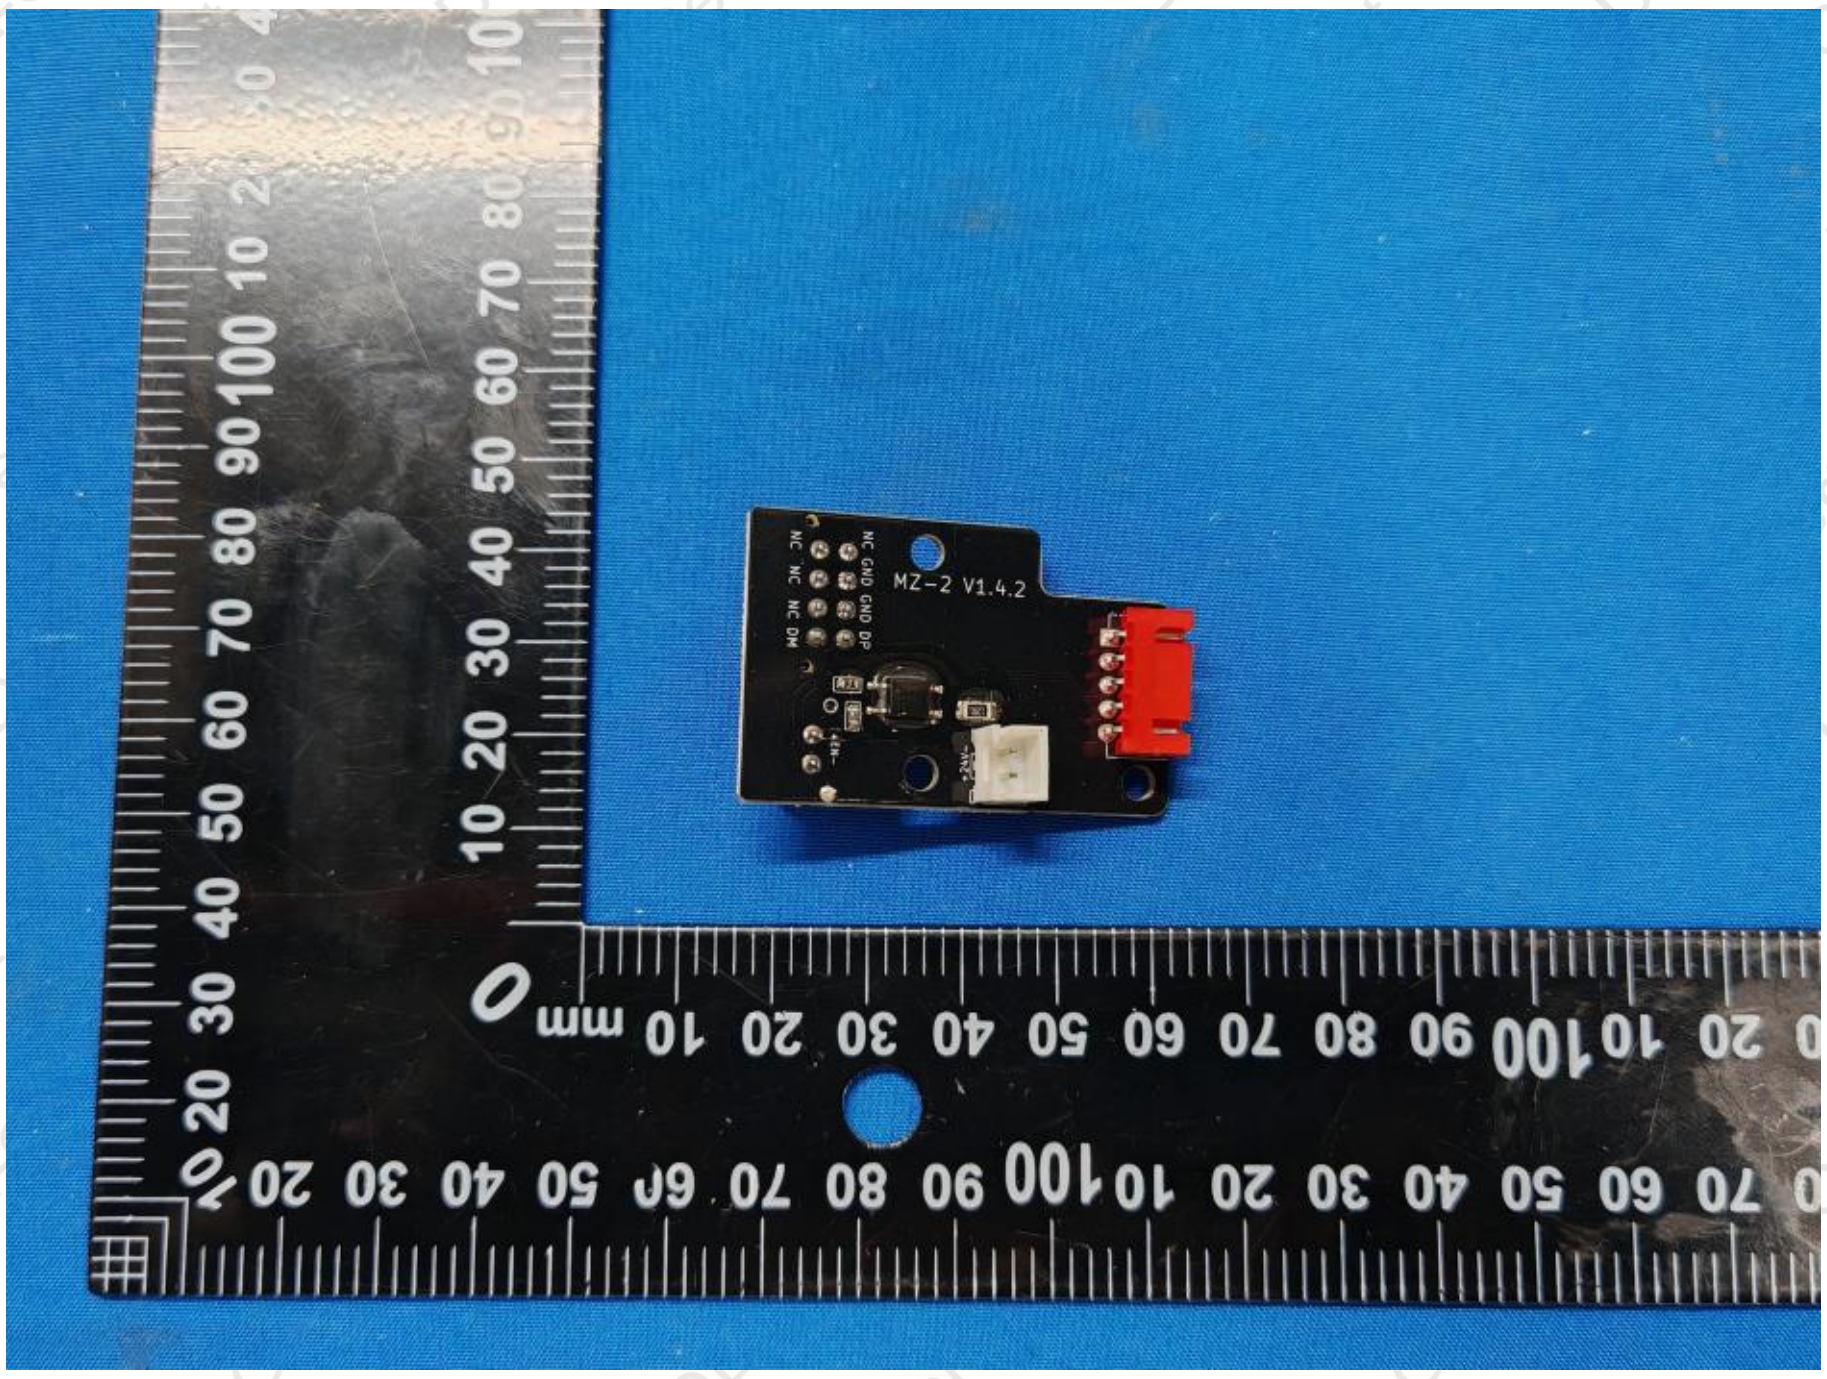
MZ-2 V1.4.2

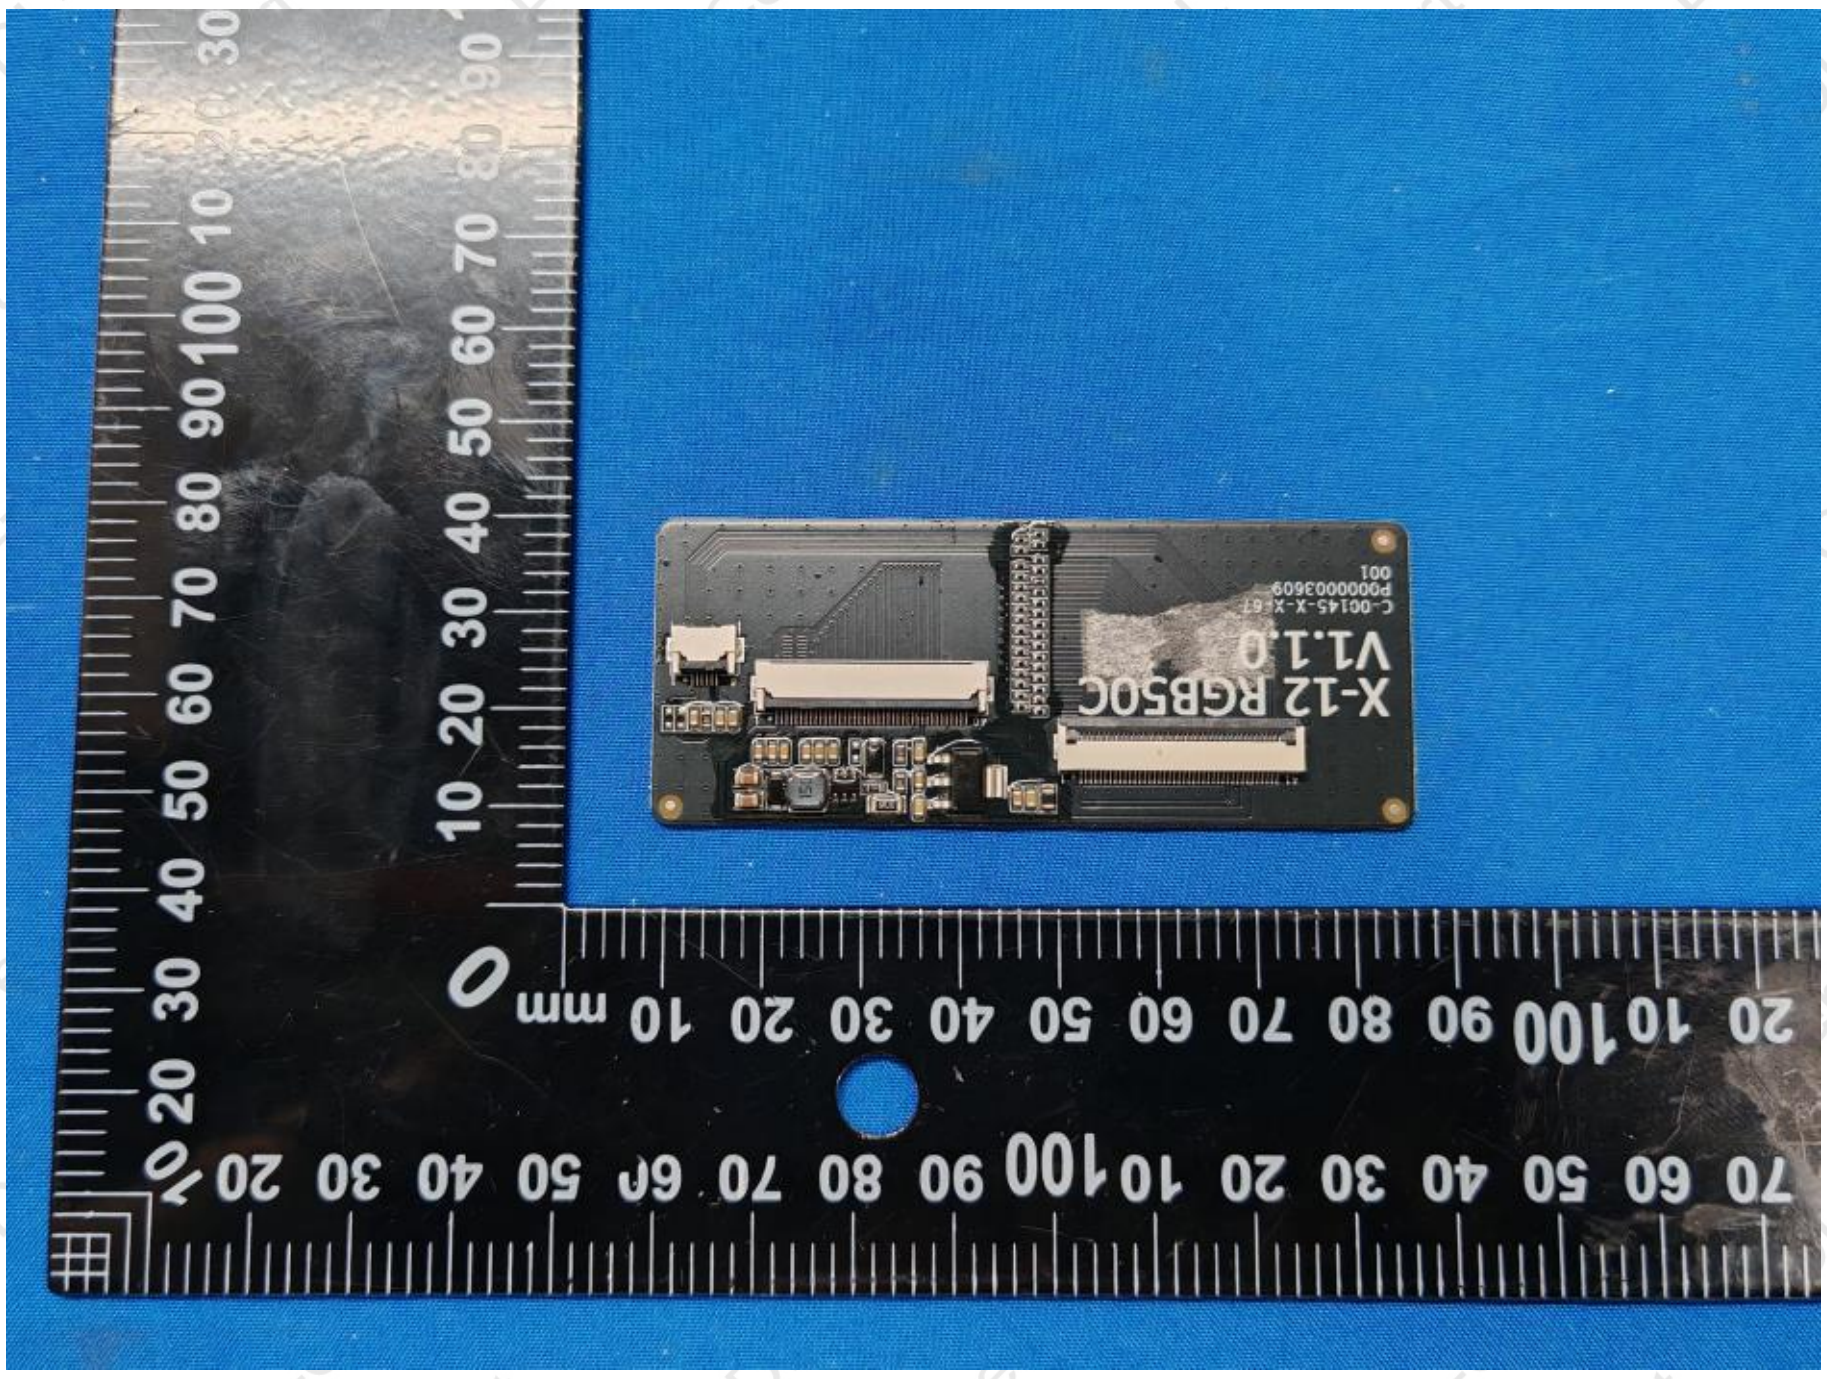
X-12 RGB50C
V1.1.0

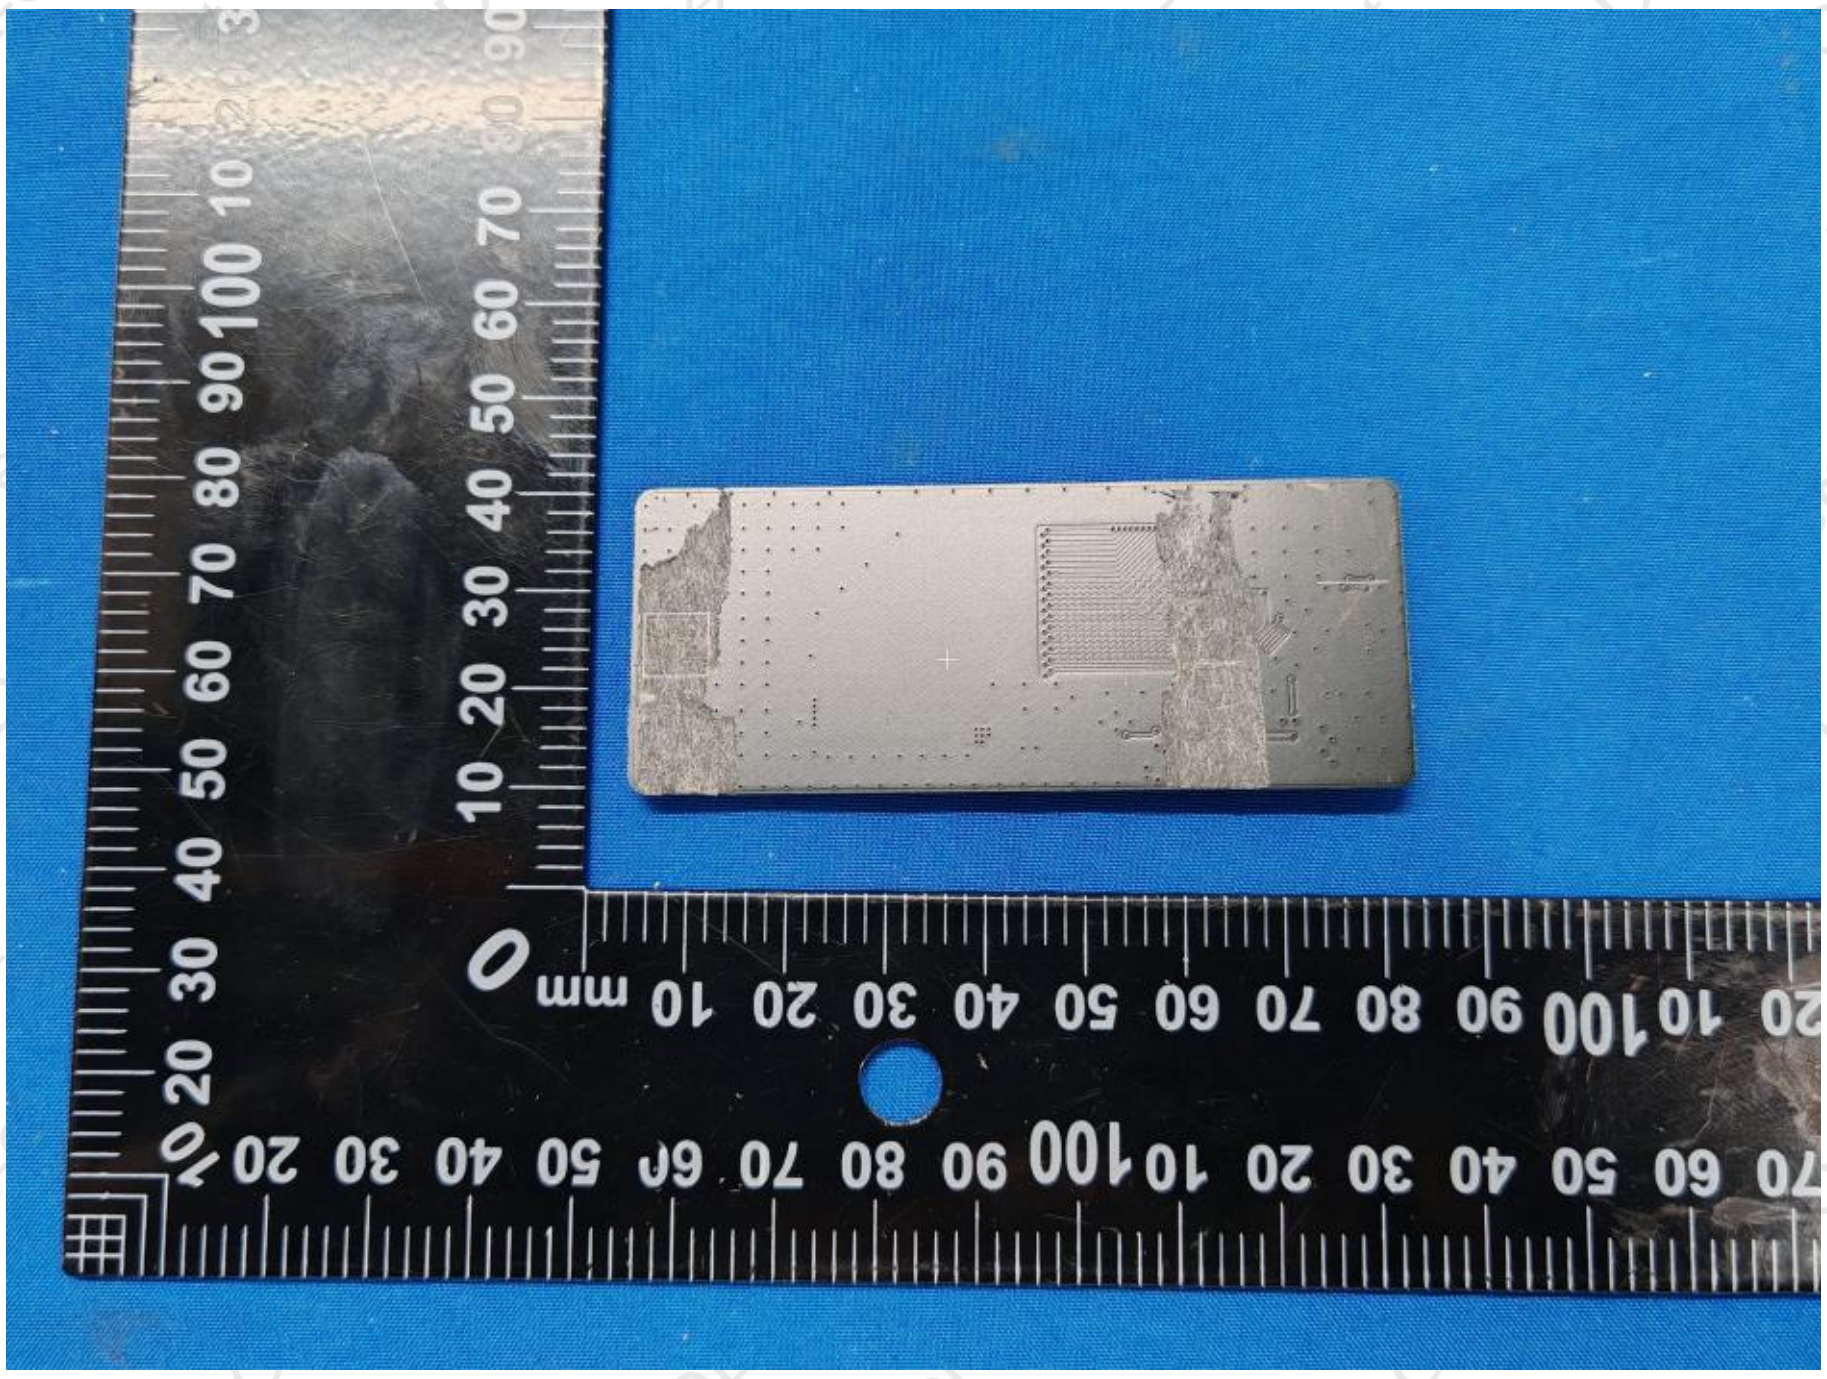

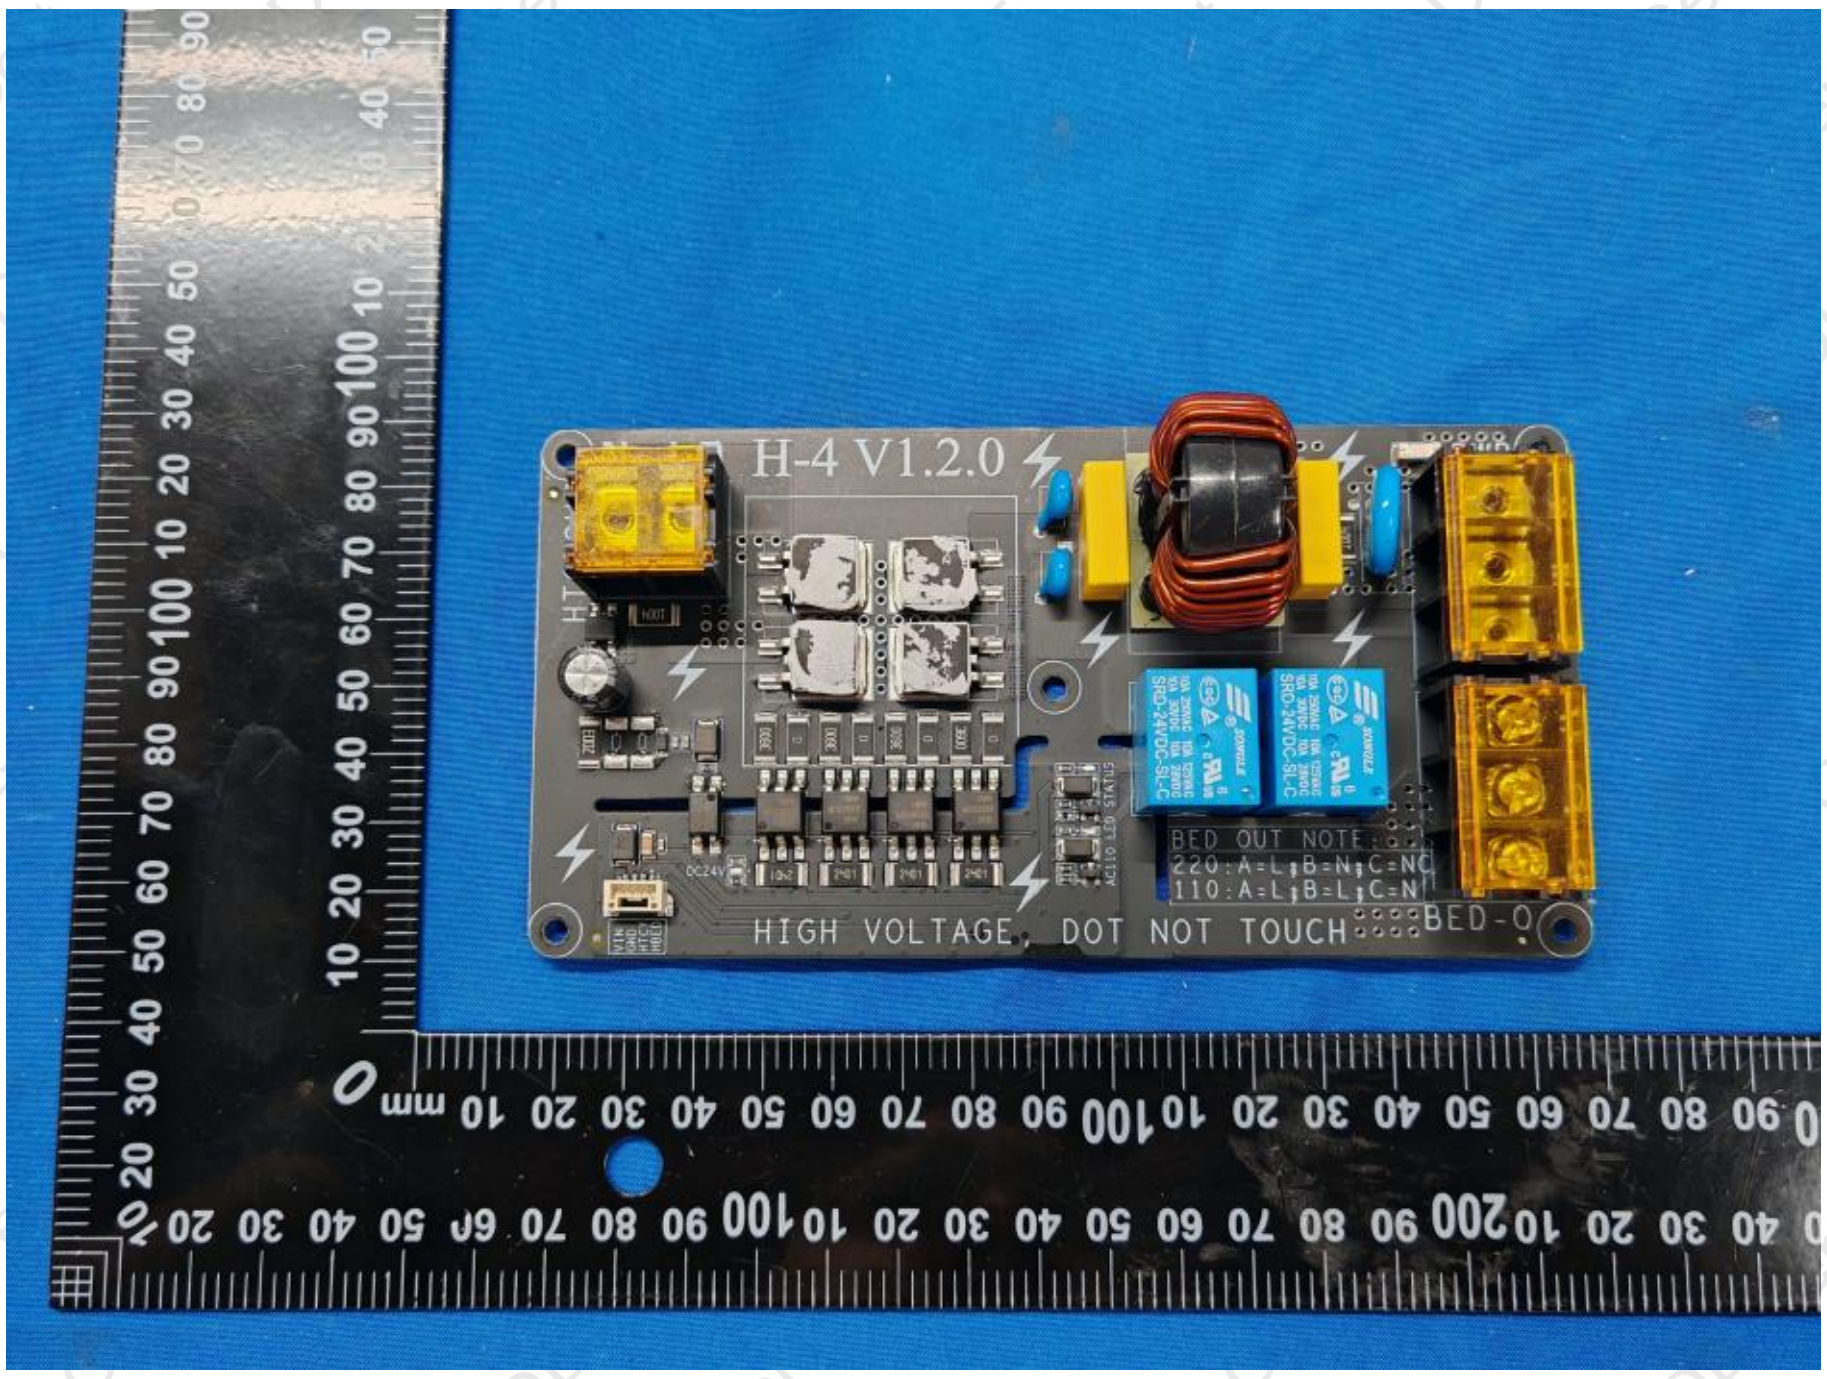
H-4 V1.2.0
HIGH VOLTAGE, DOT NOT TOUCH
BED OUT NOTE:
220:A=L;B=N;C=NC
110:A=L;B=L;C=N
BED-O

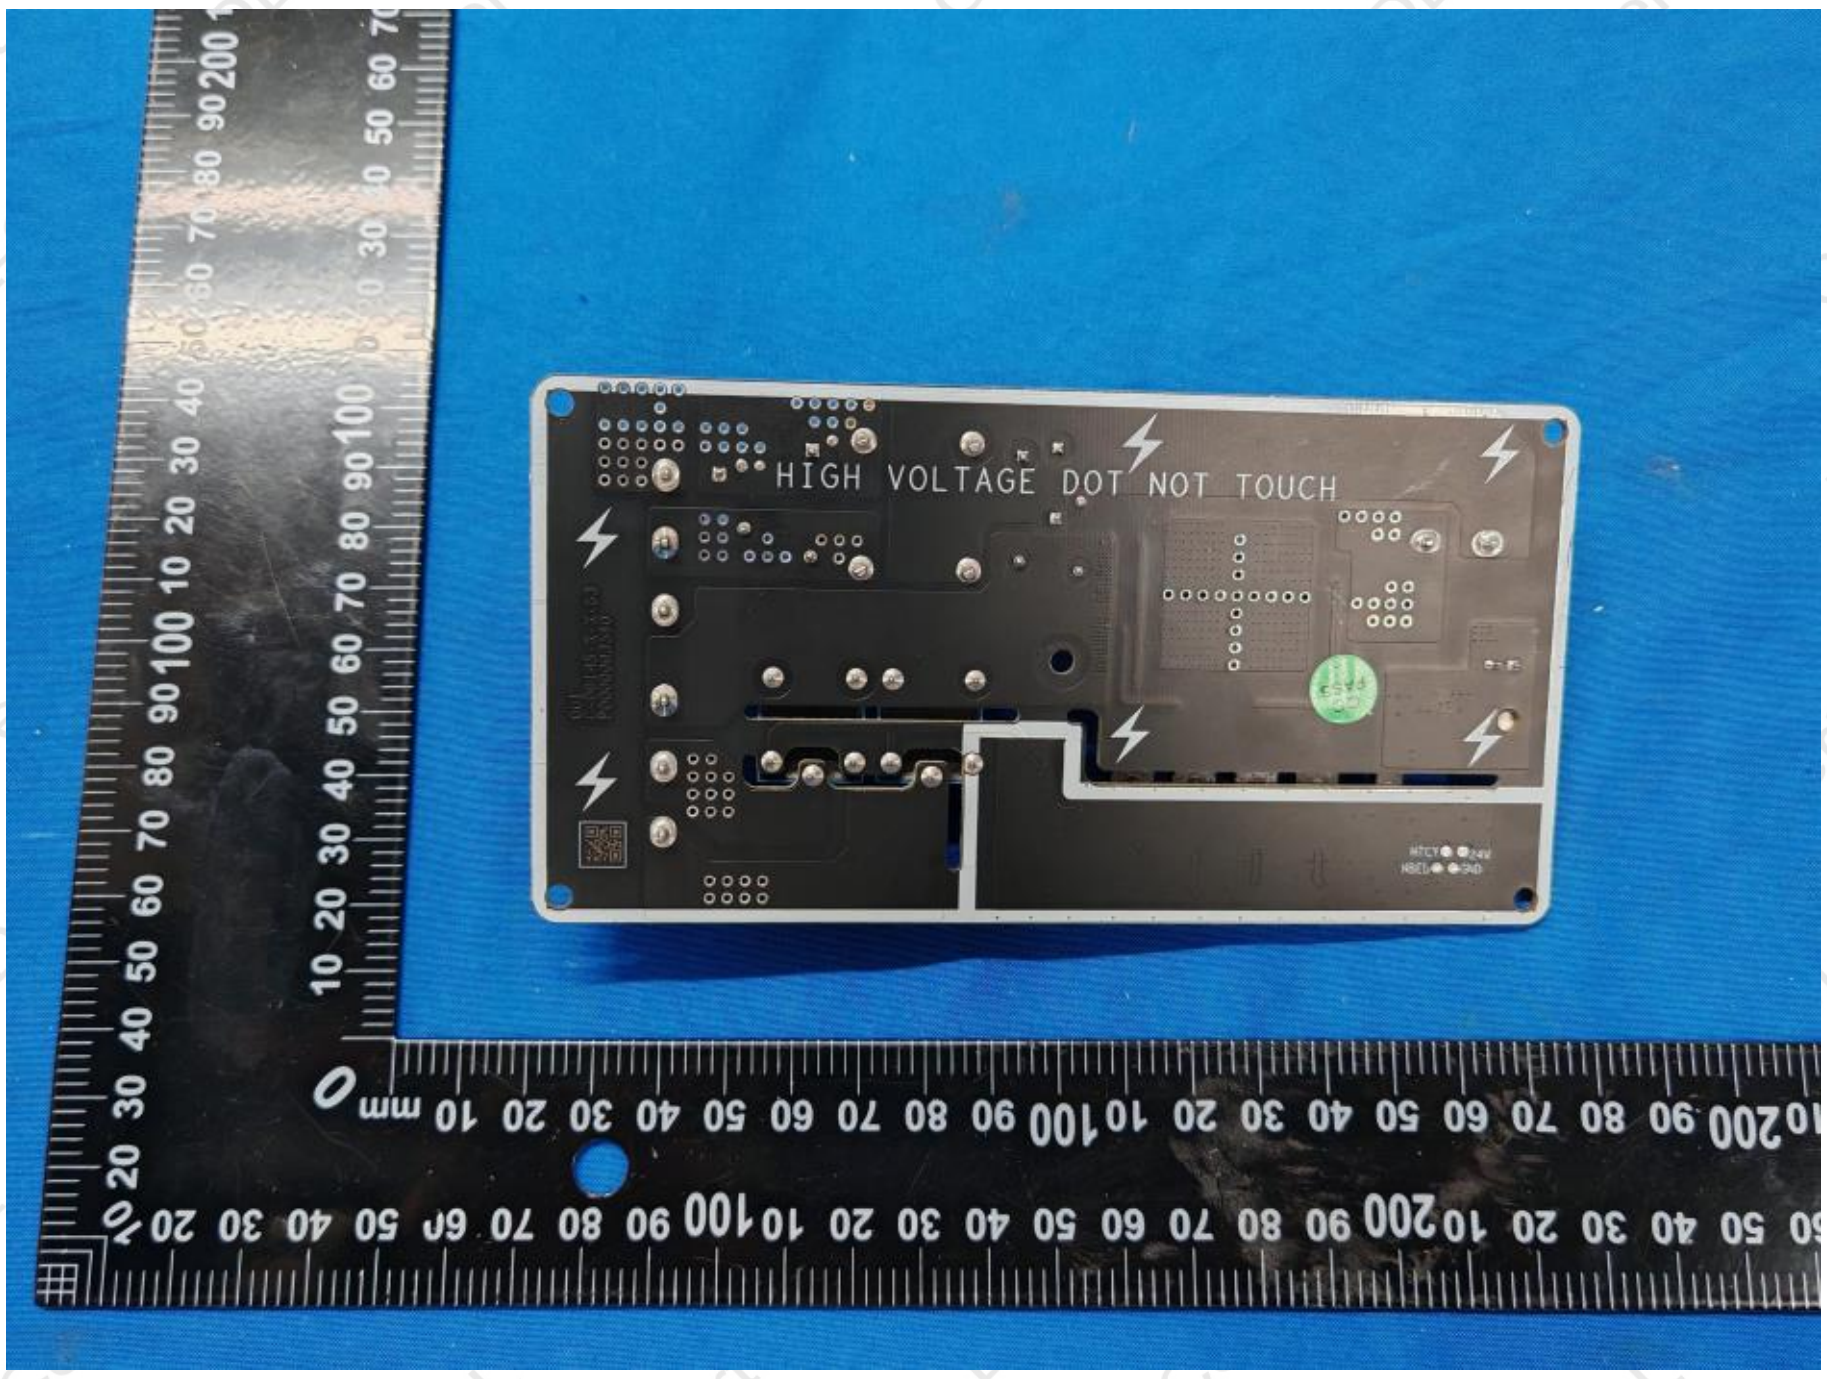
HIGH VOLTAGE DOT NOT TOUCH

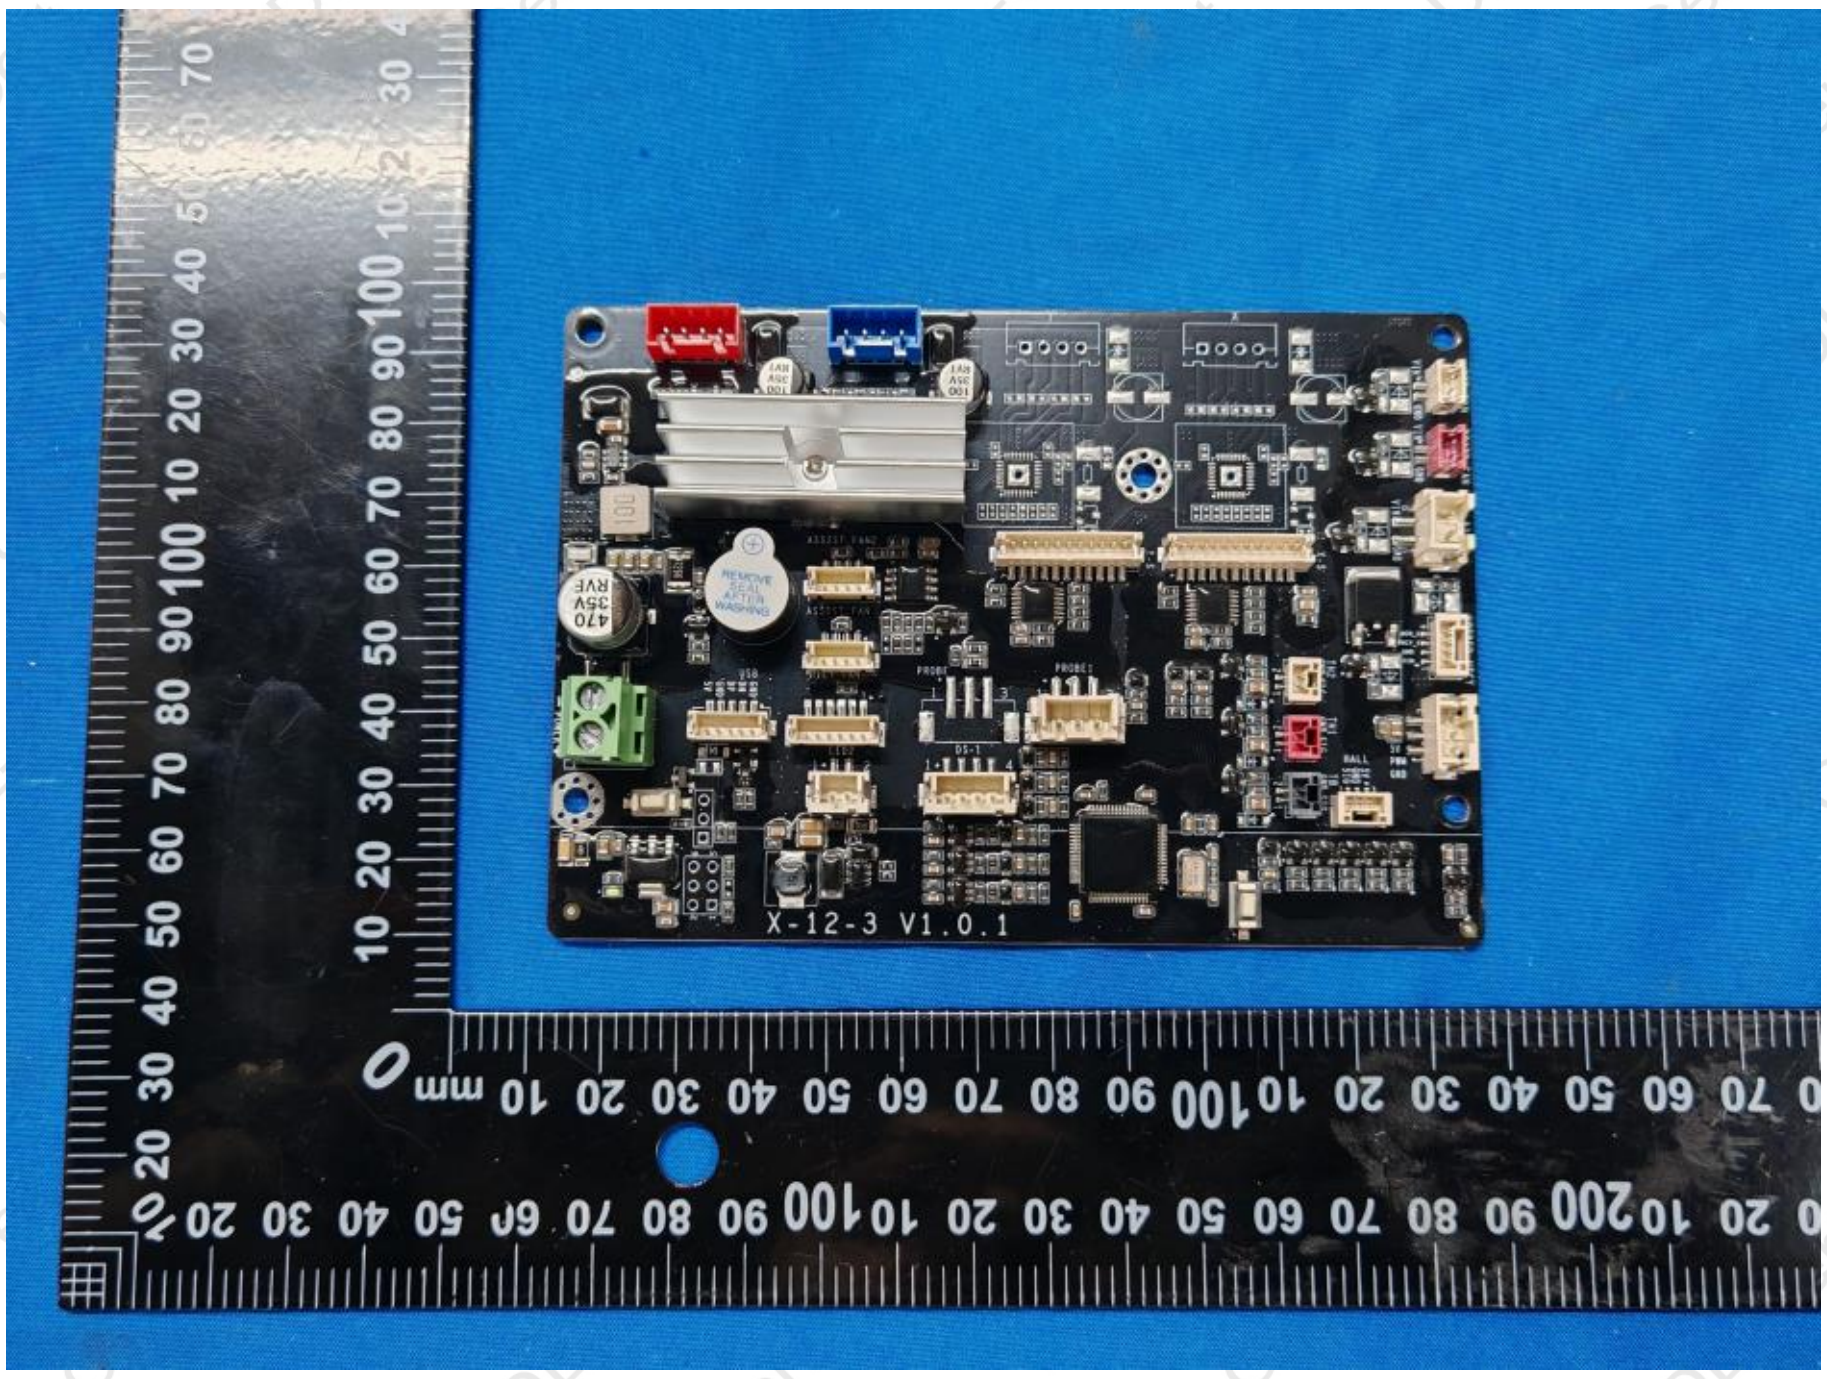
X-12-3 V1.0.1

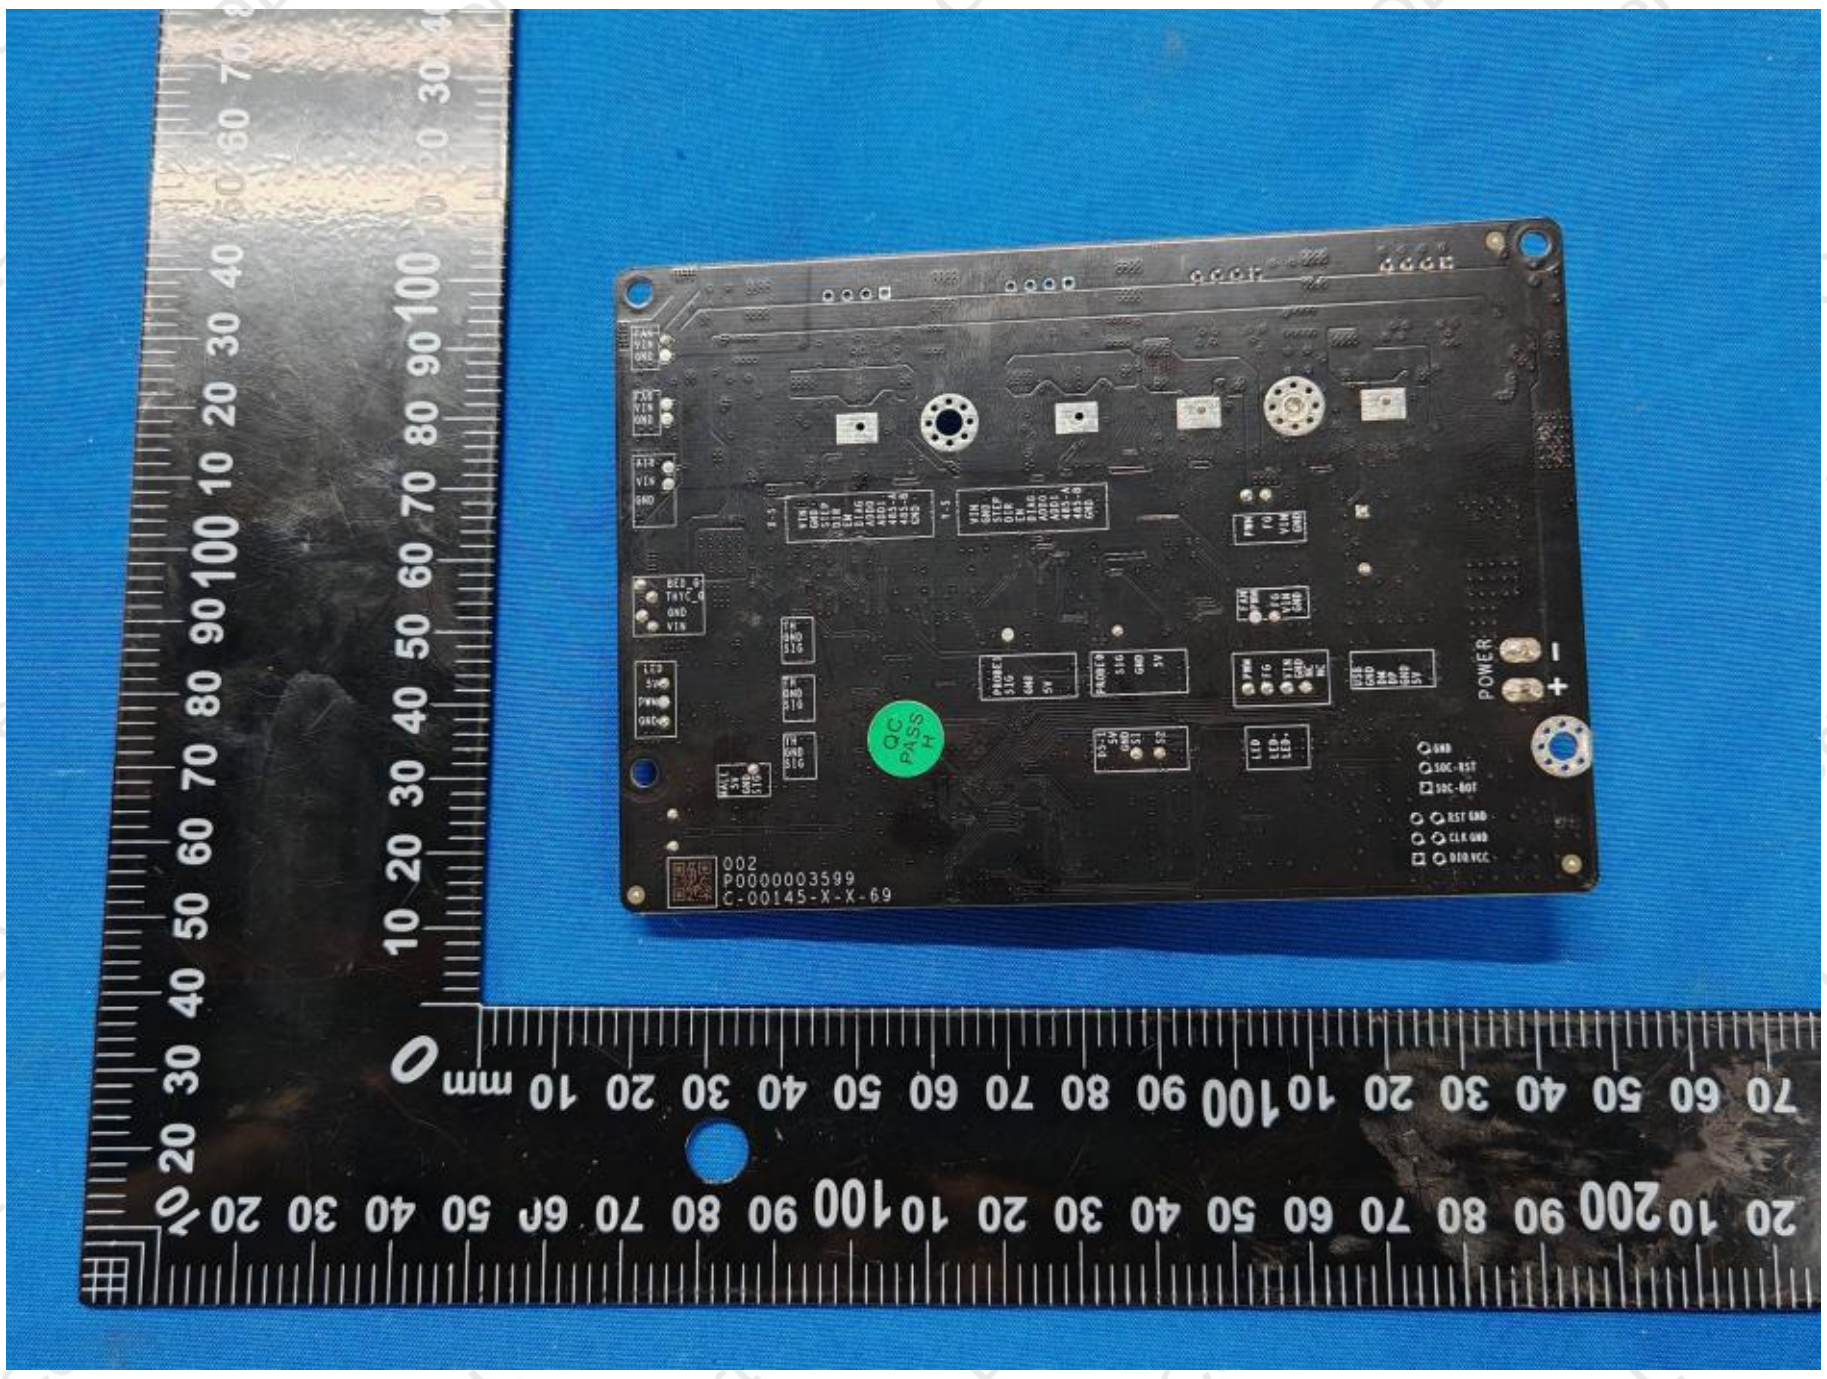
POWER
QC
PASS

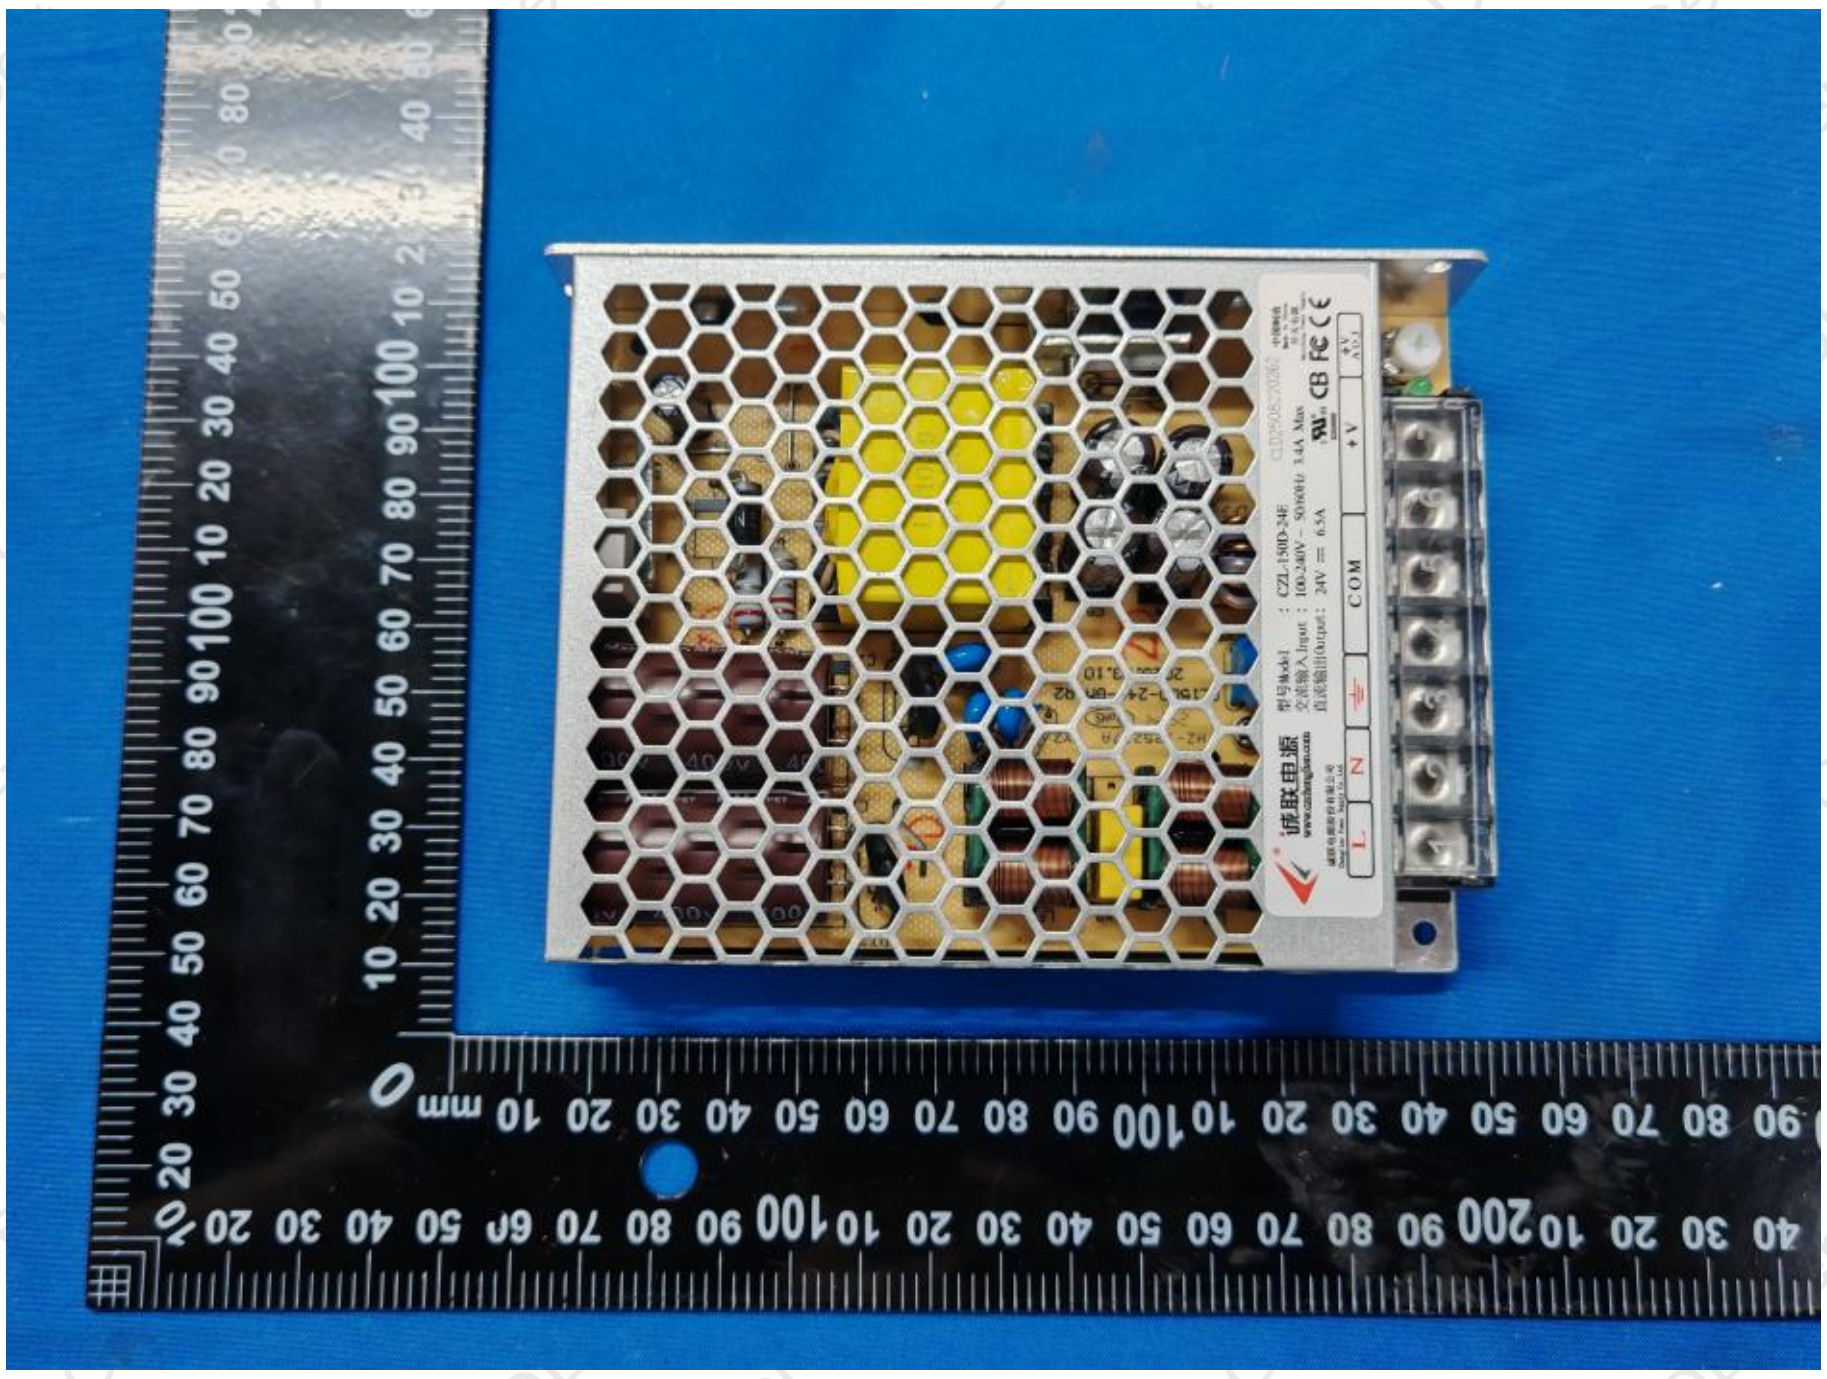

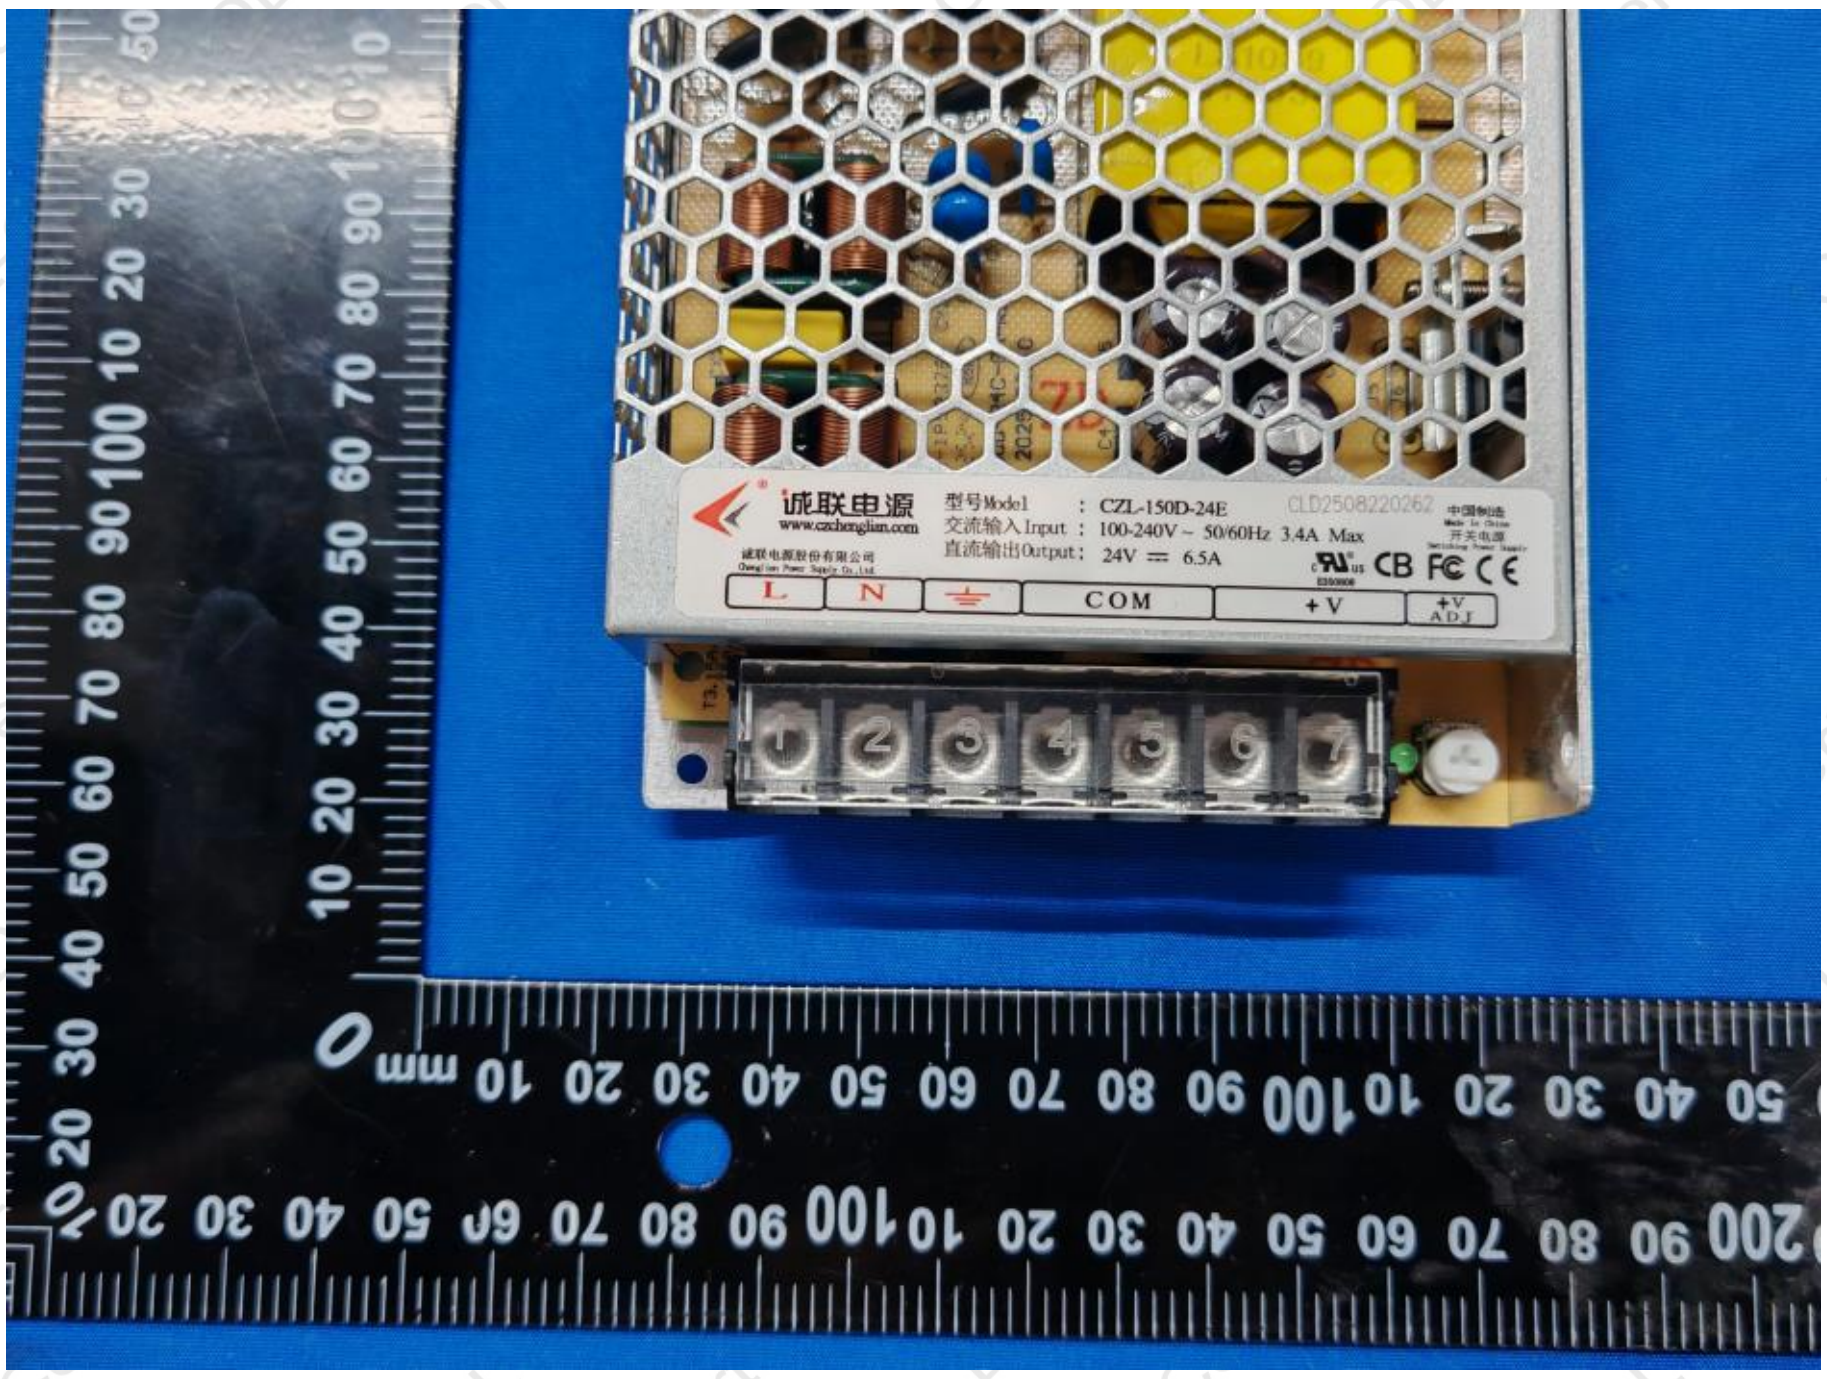
诚联电源
www.czchenglian.com
CZL-150D-24E
100-240V~ 50/60Hz 3.4A Max
24V 6.5A
L
N
COM
+V

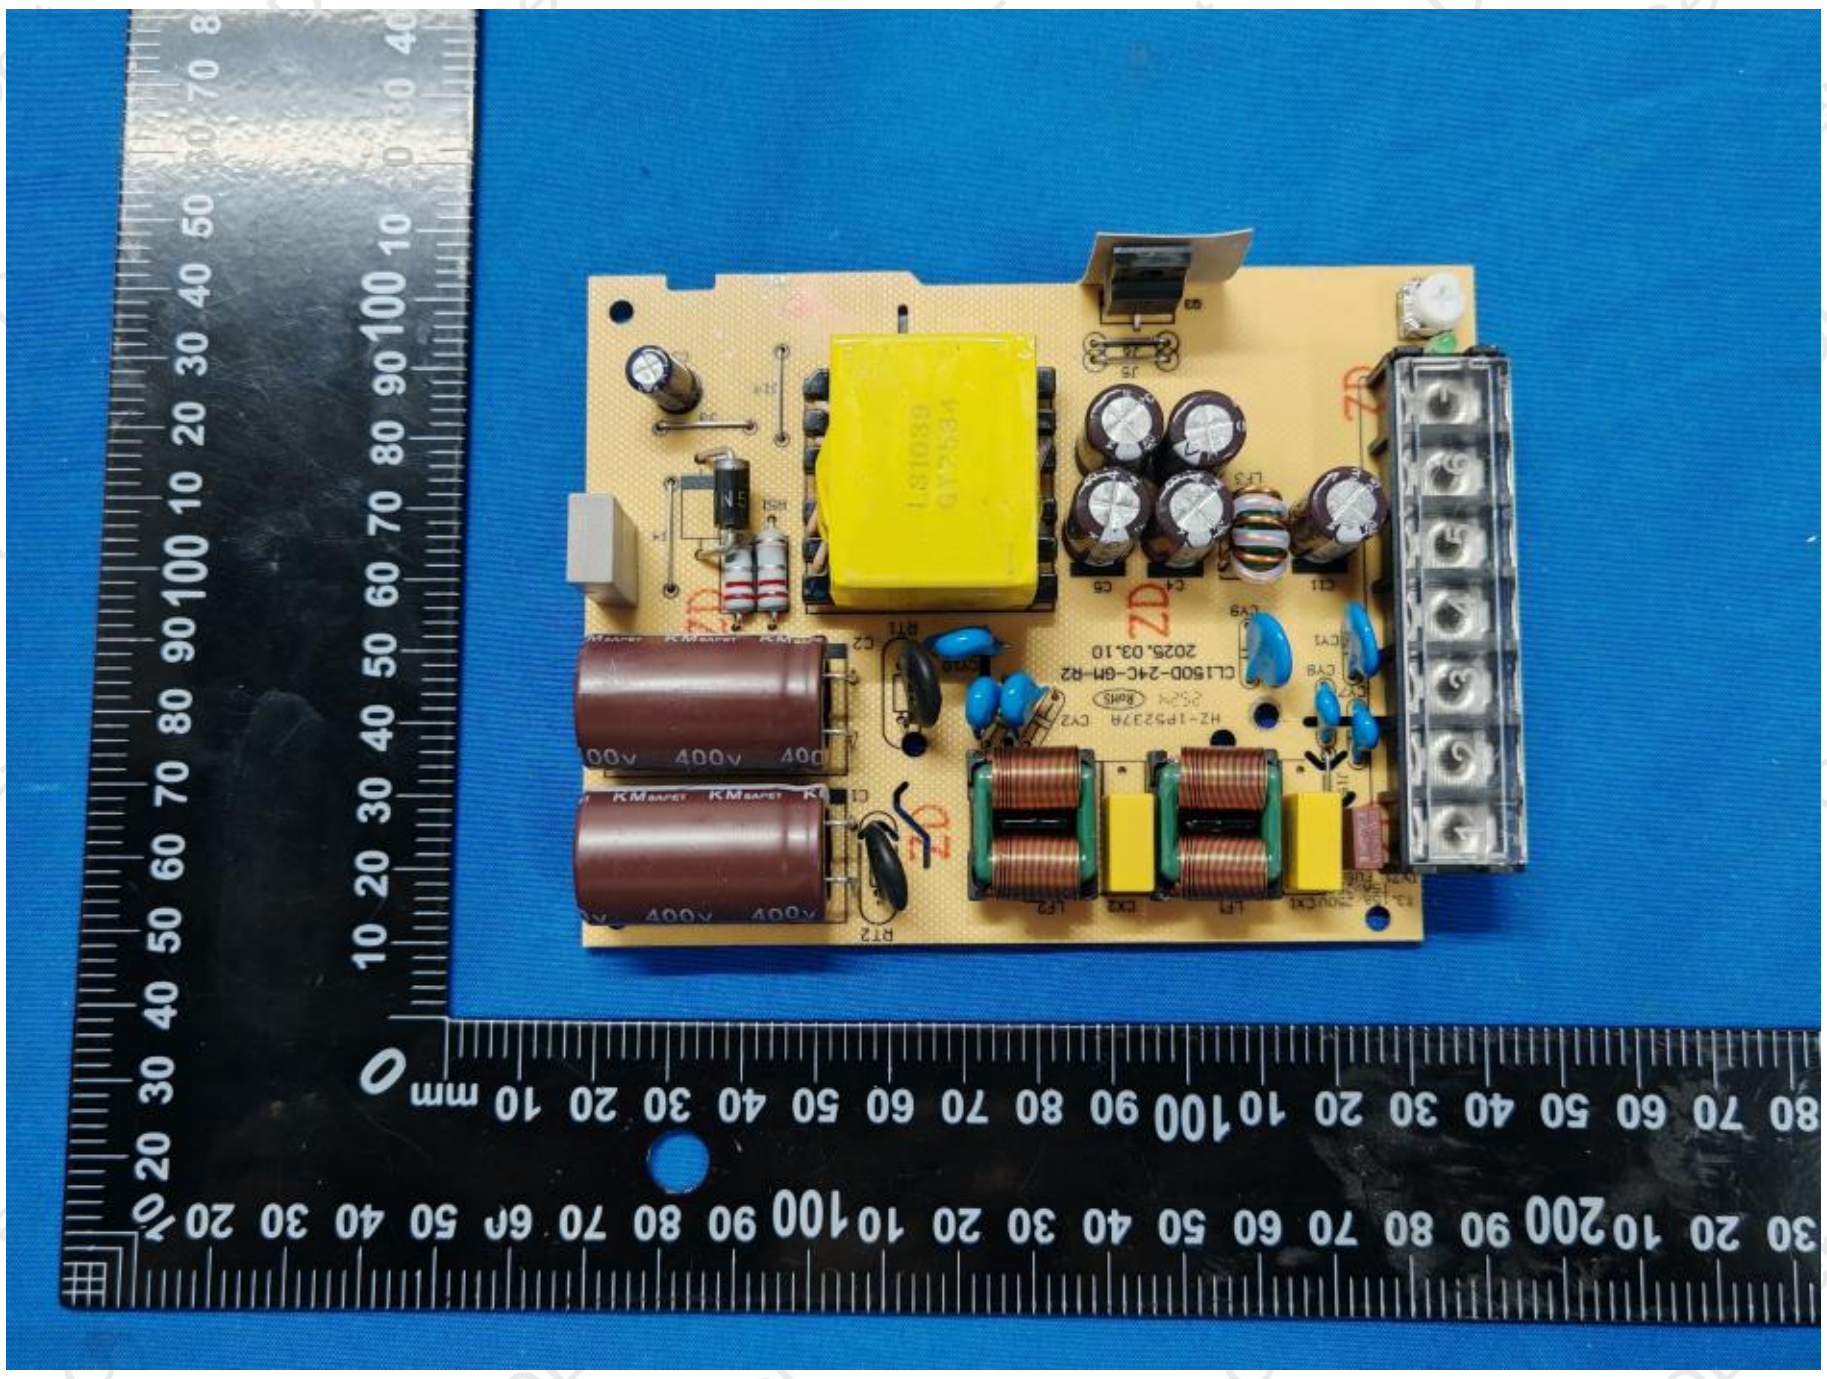

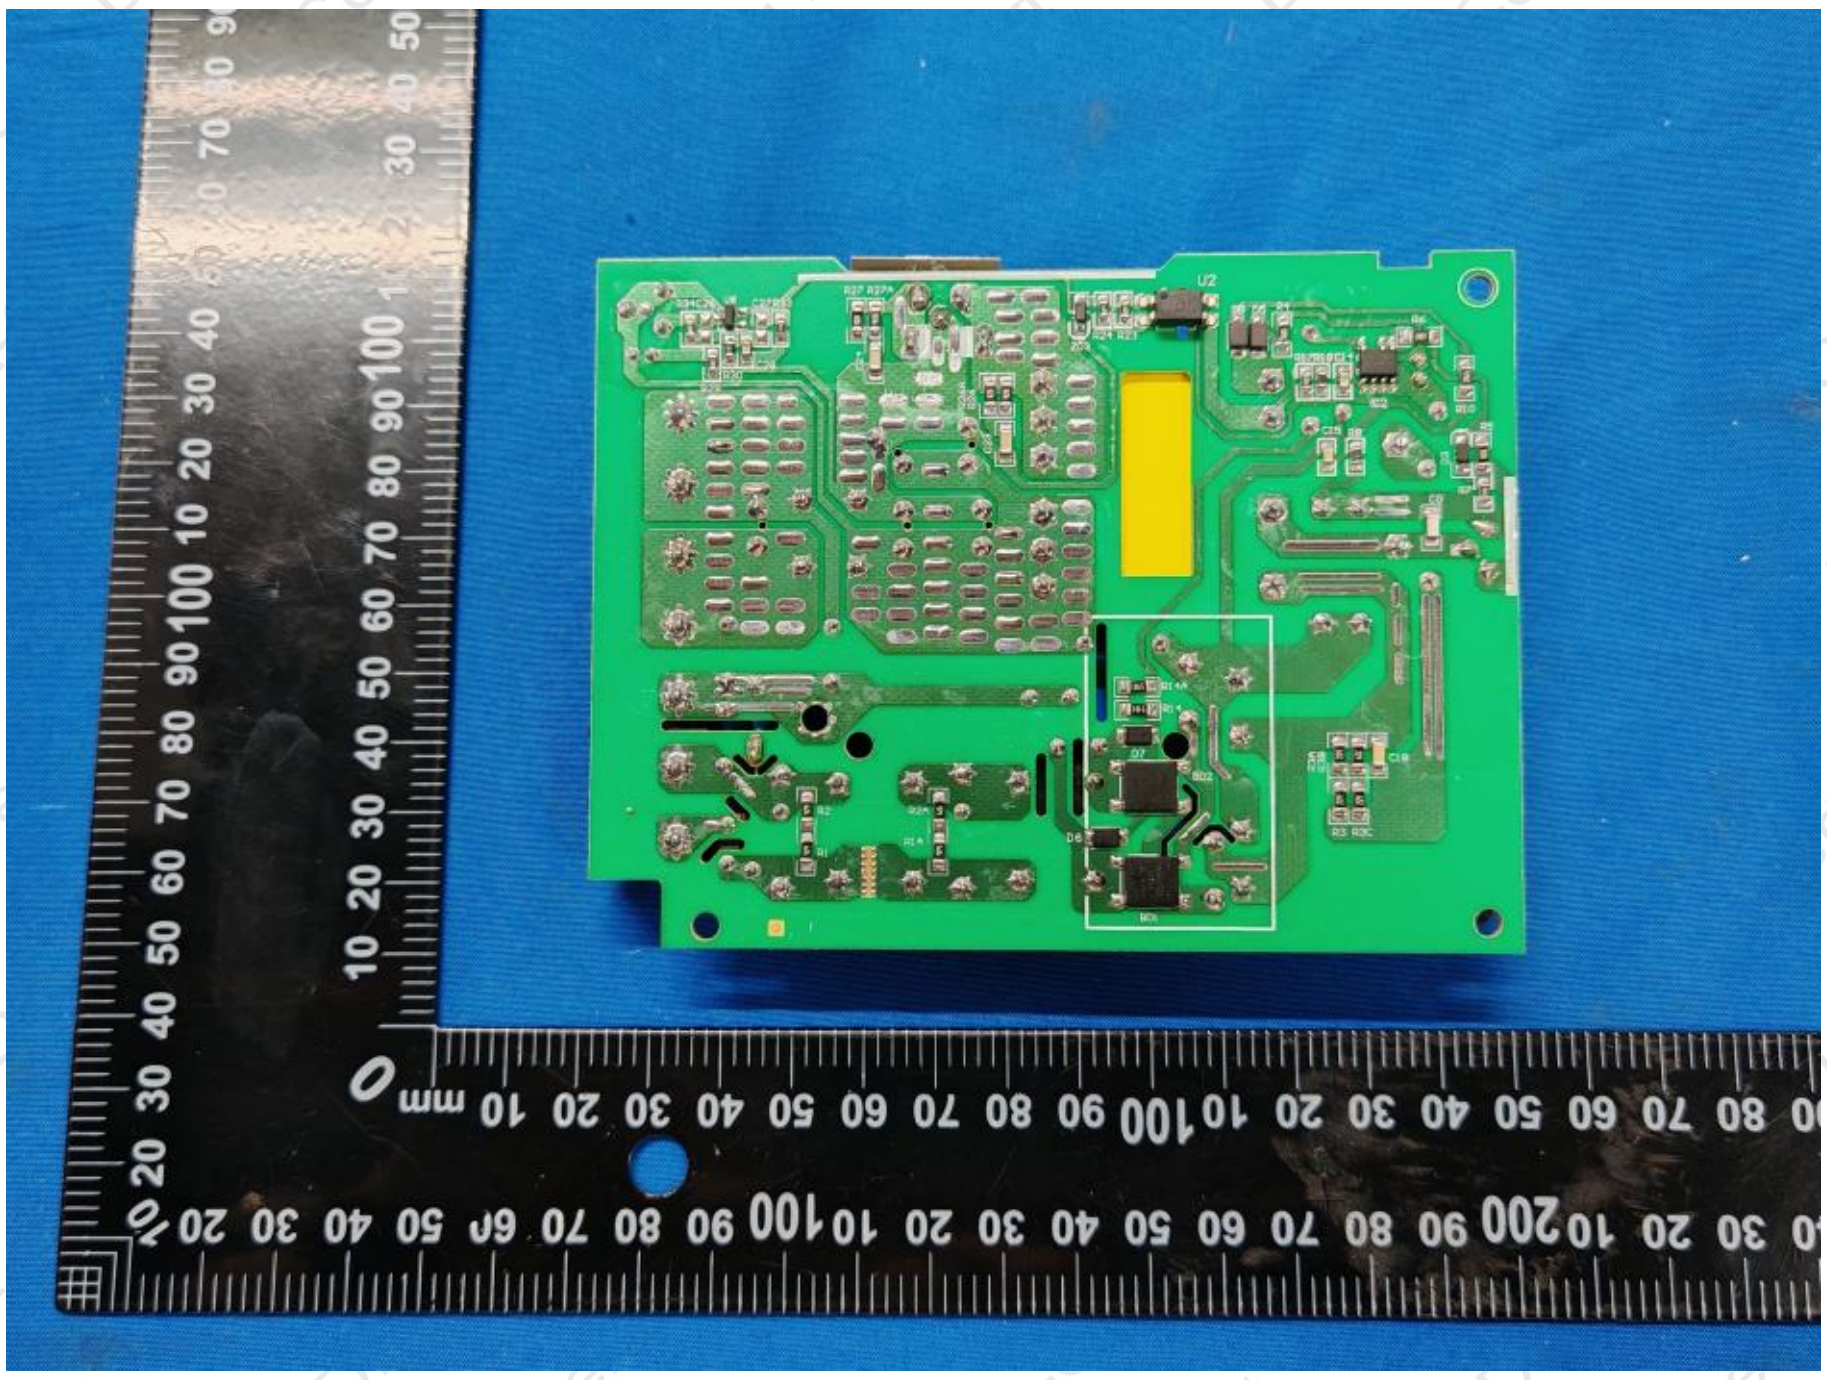

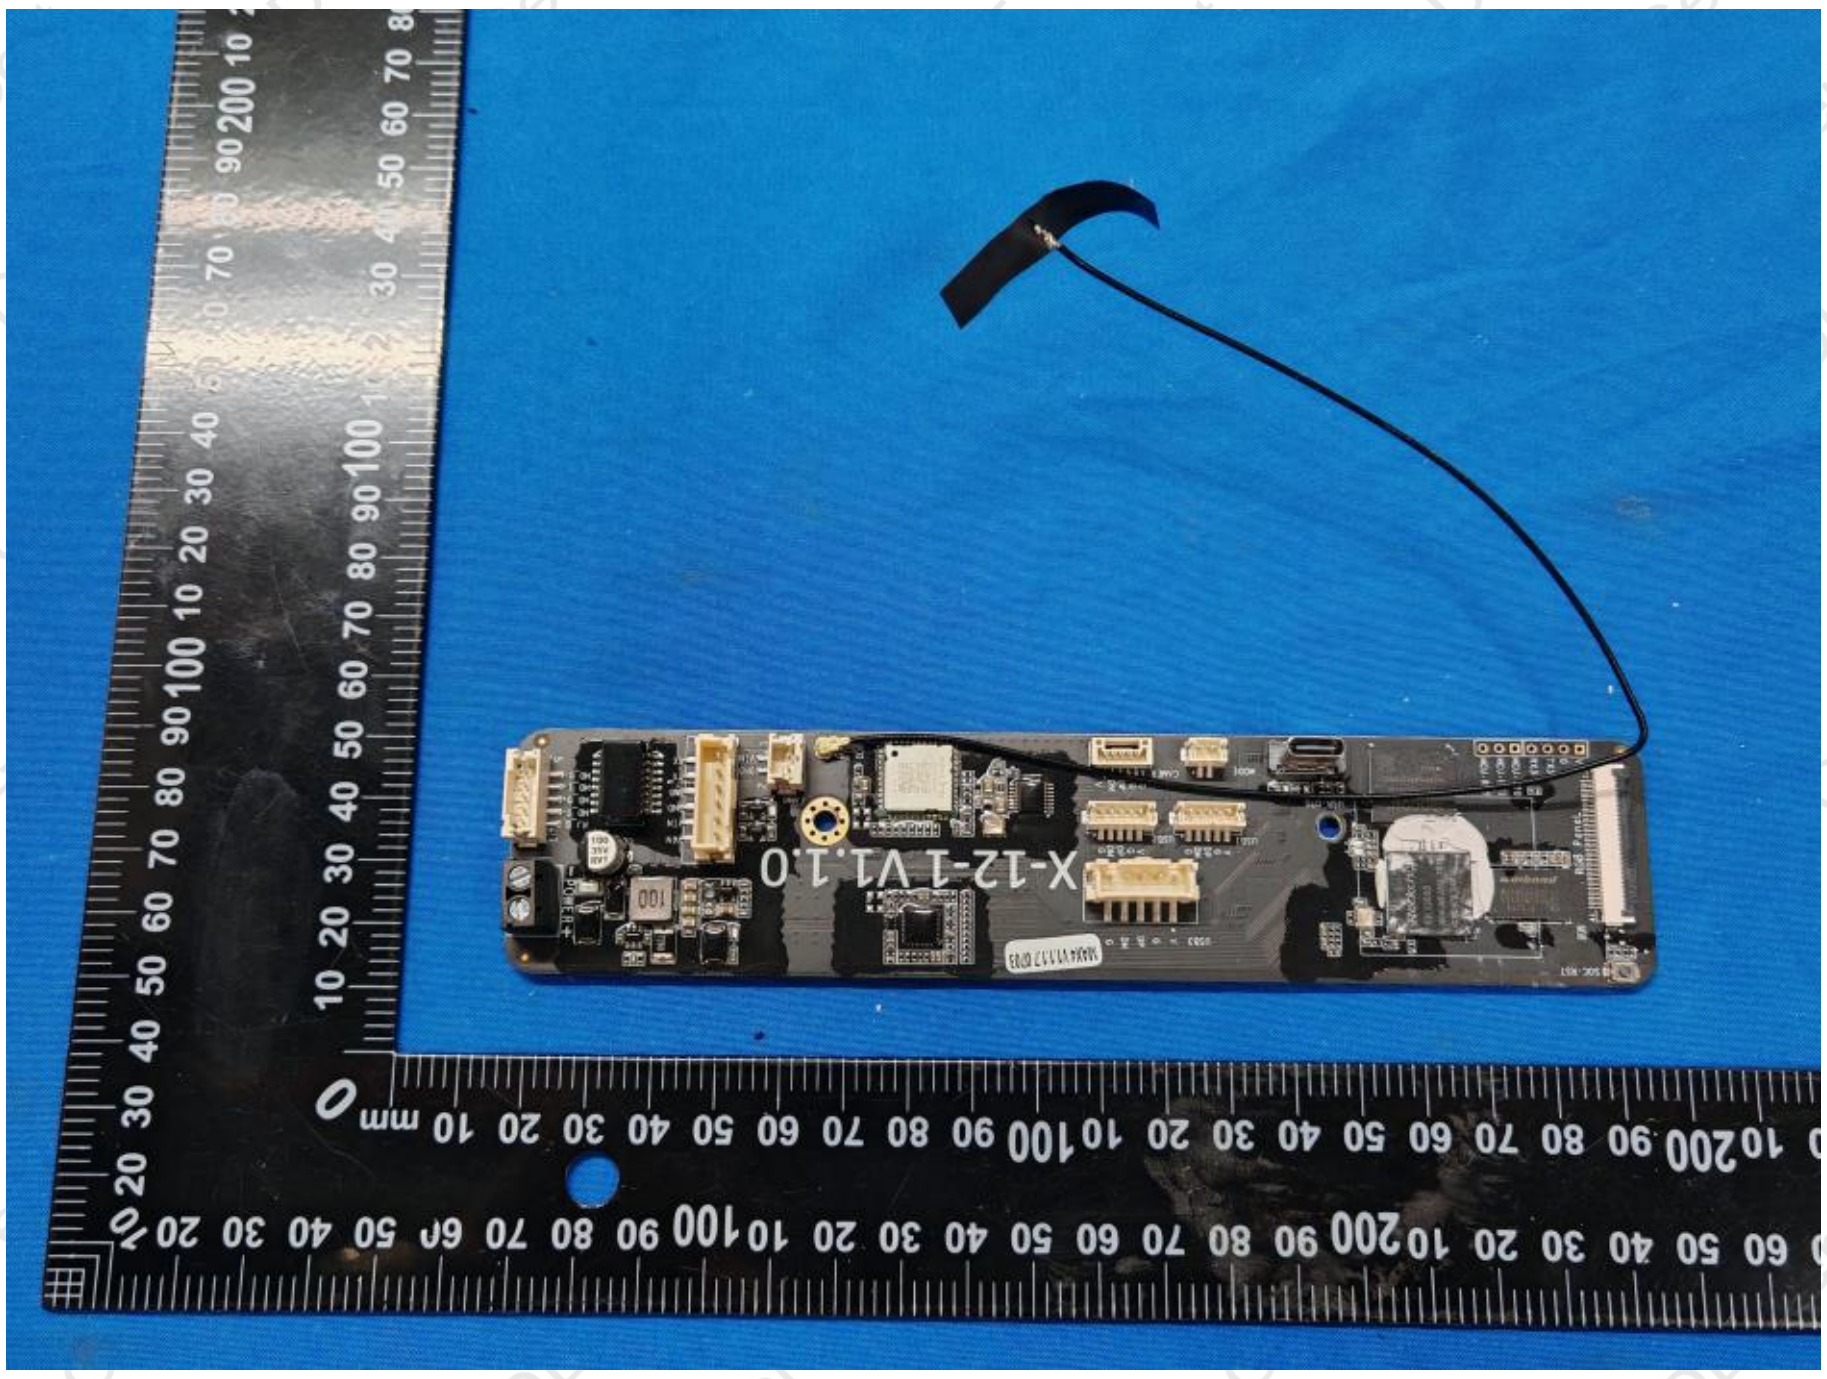
X-12-1 V1.1.0

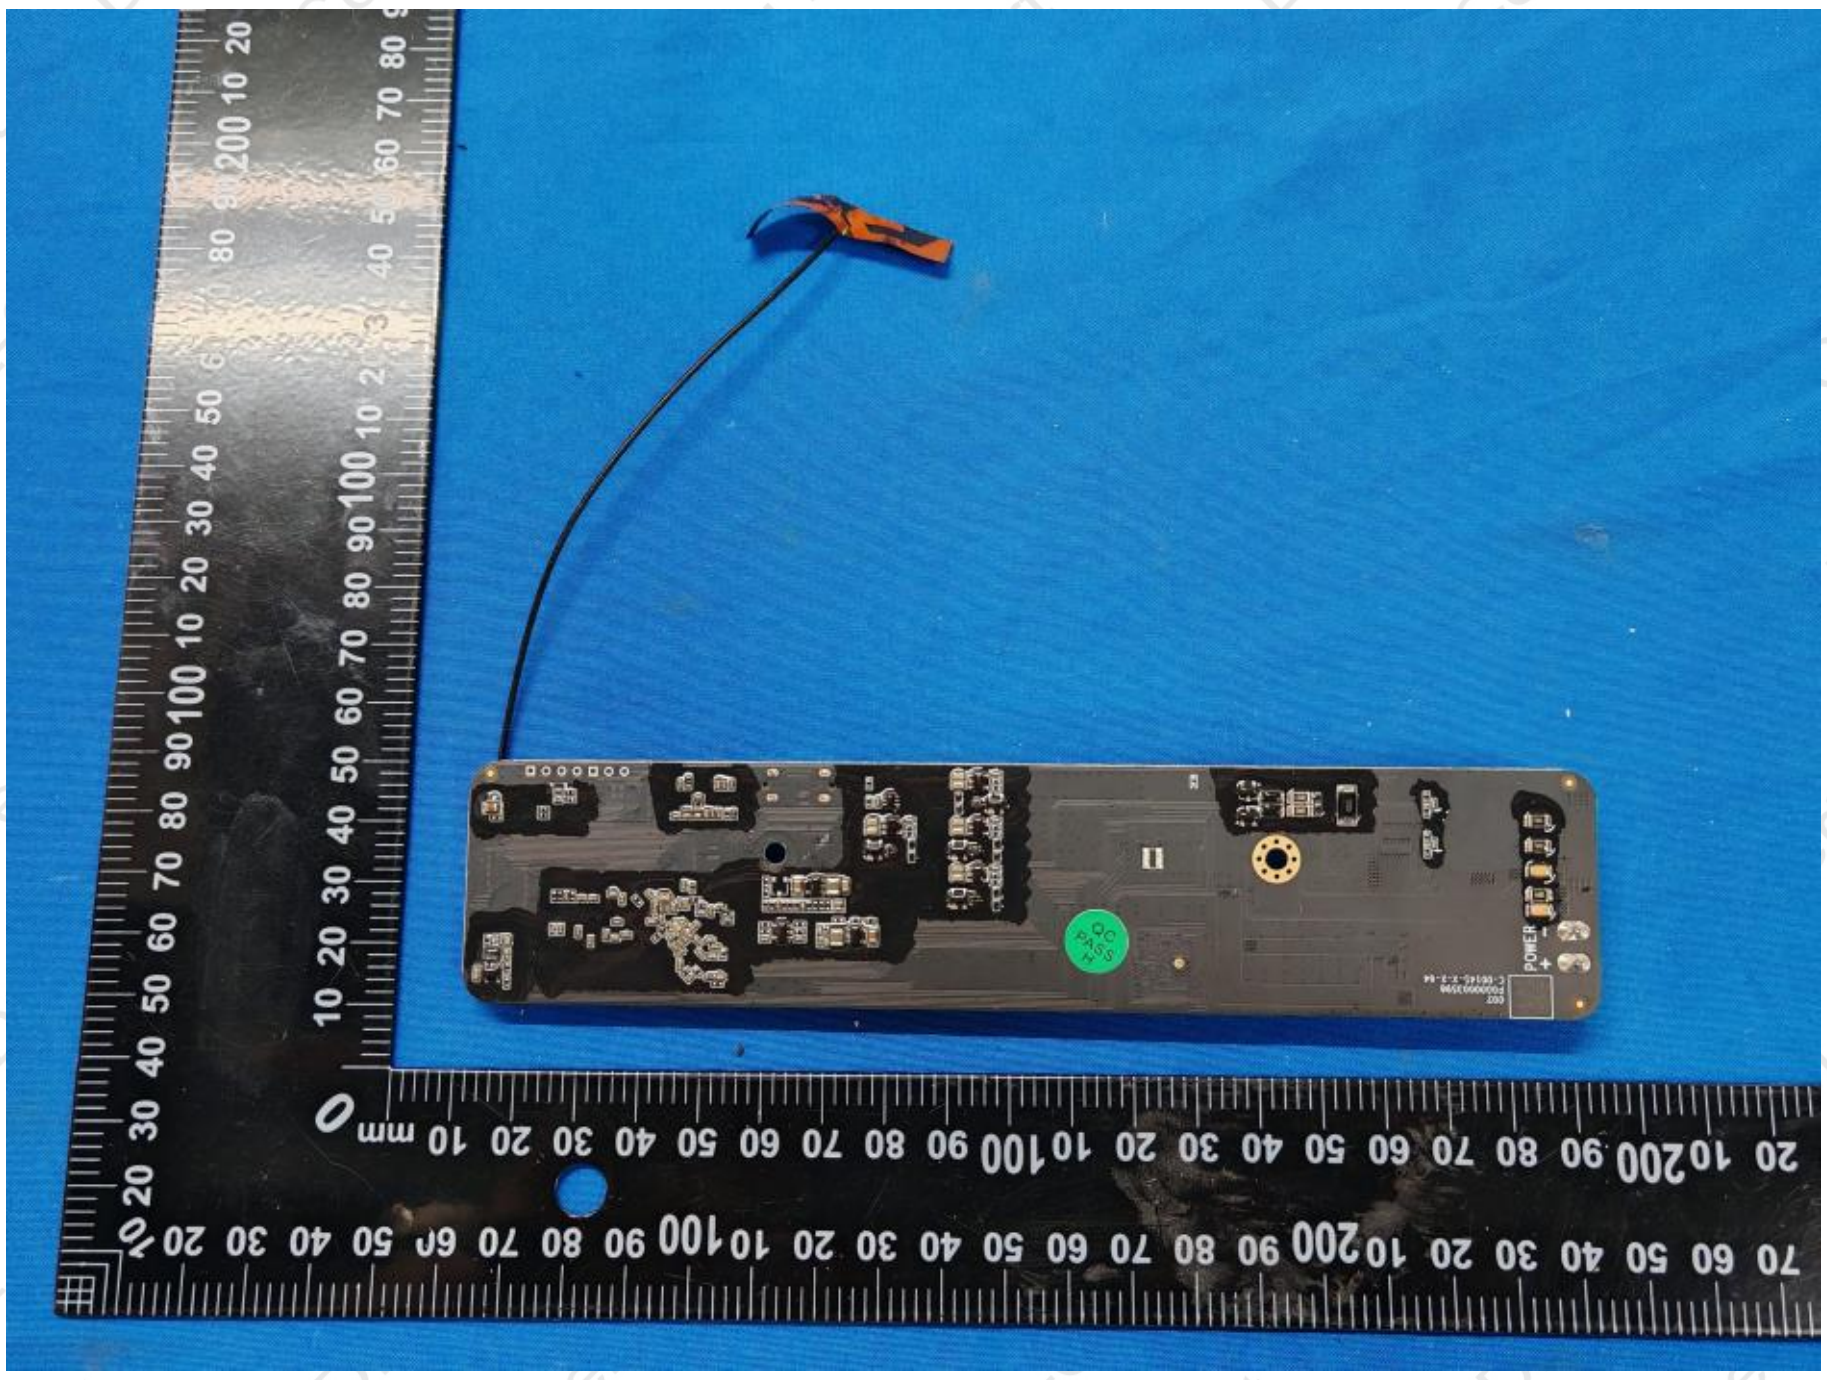

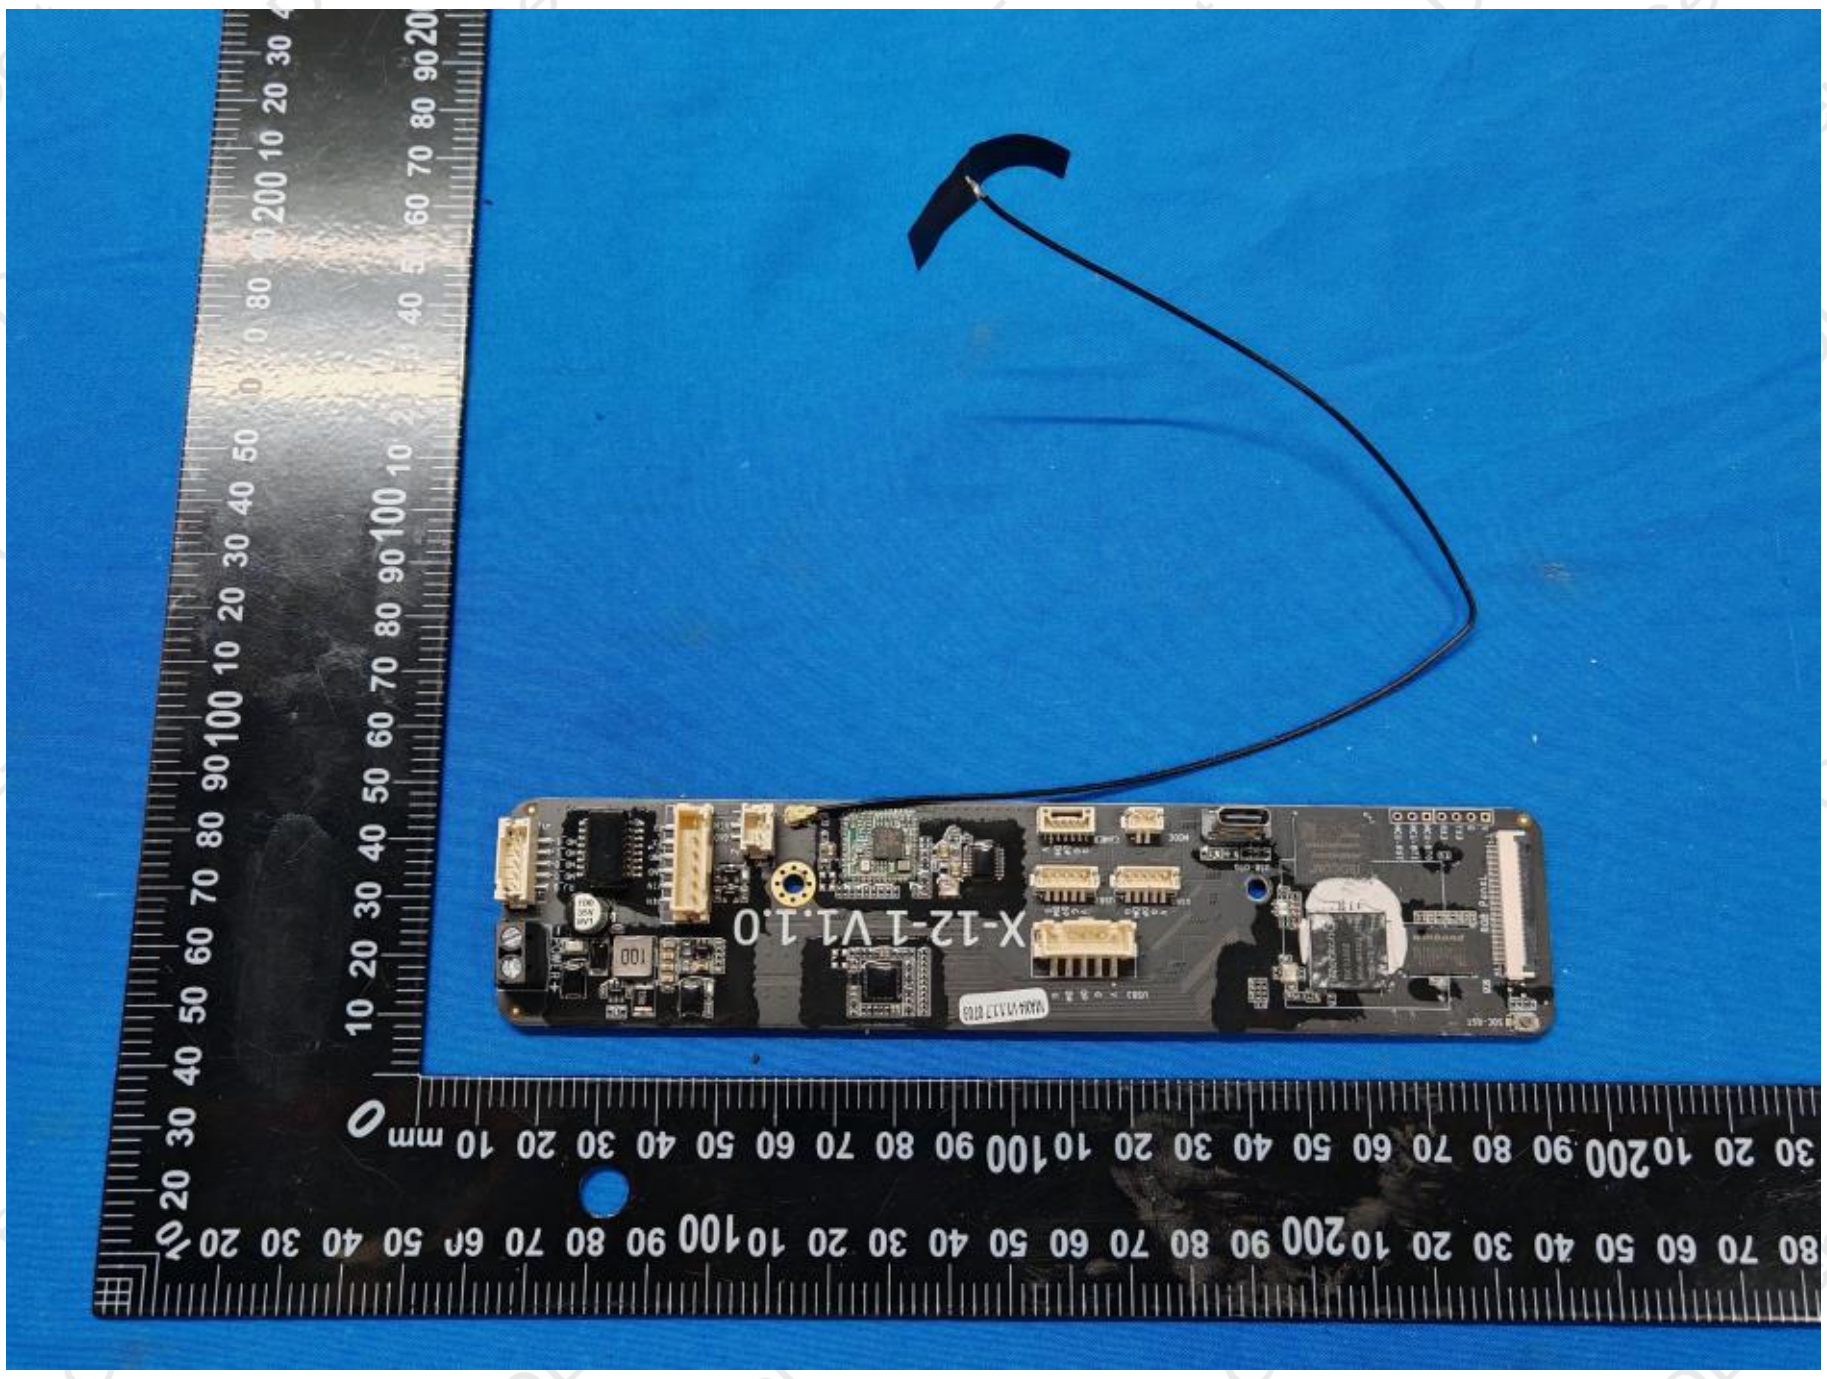
X-12-1 V1.1.0

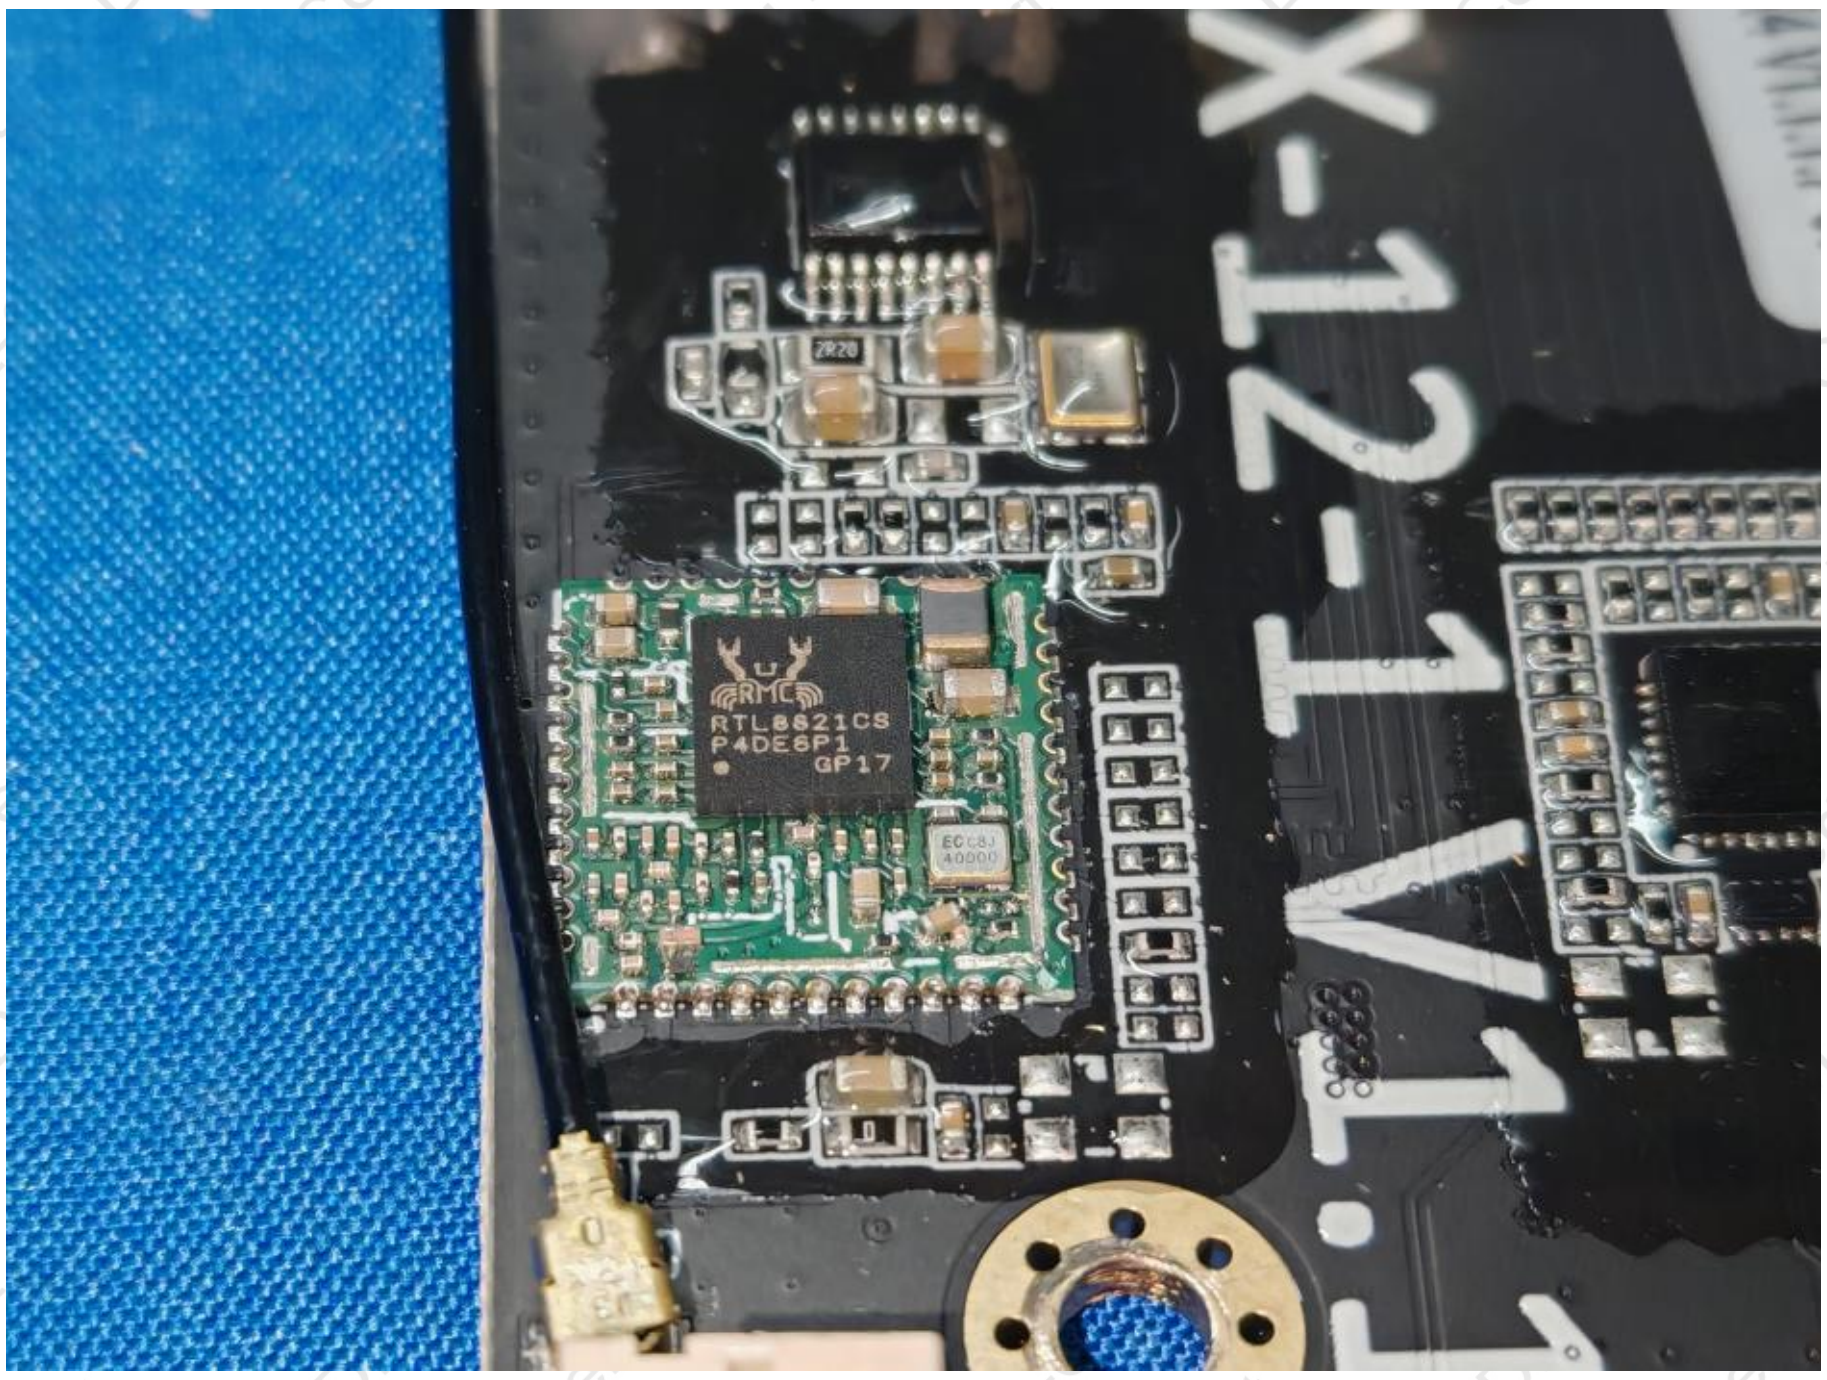
RTL8821CS
P4DE6P1
GP17

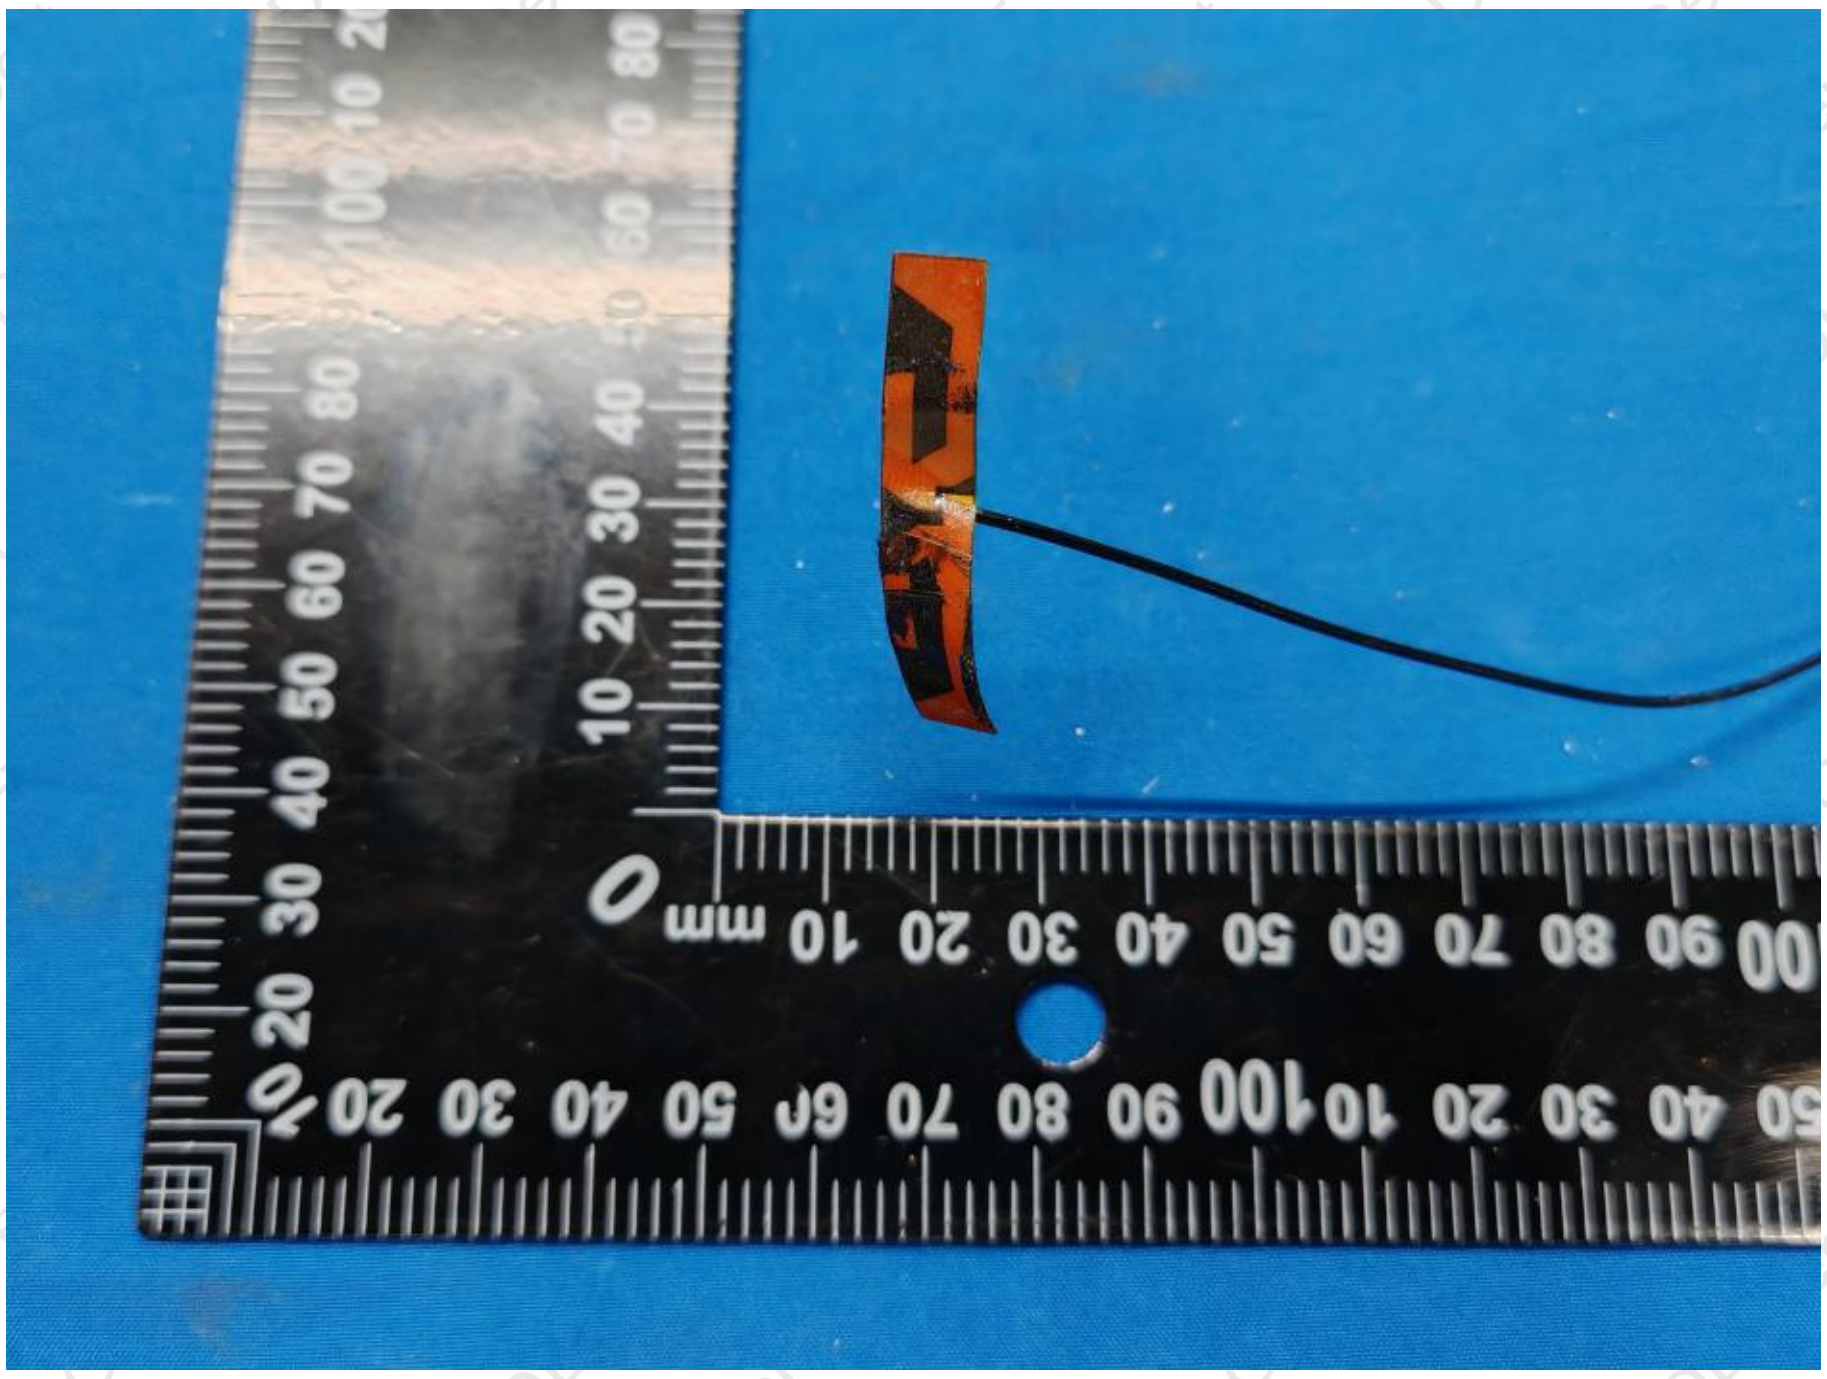

※※※※※ **END OF REPORT** ※※※※※