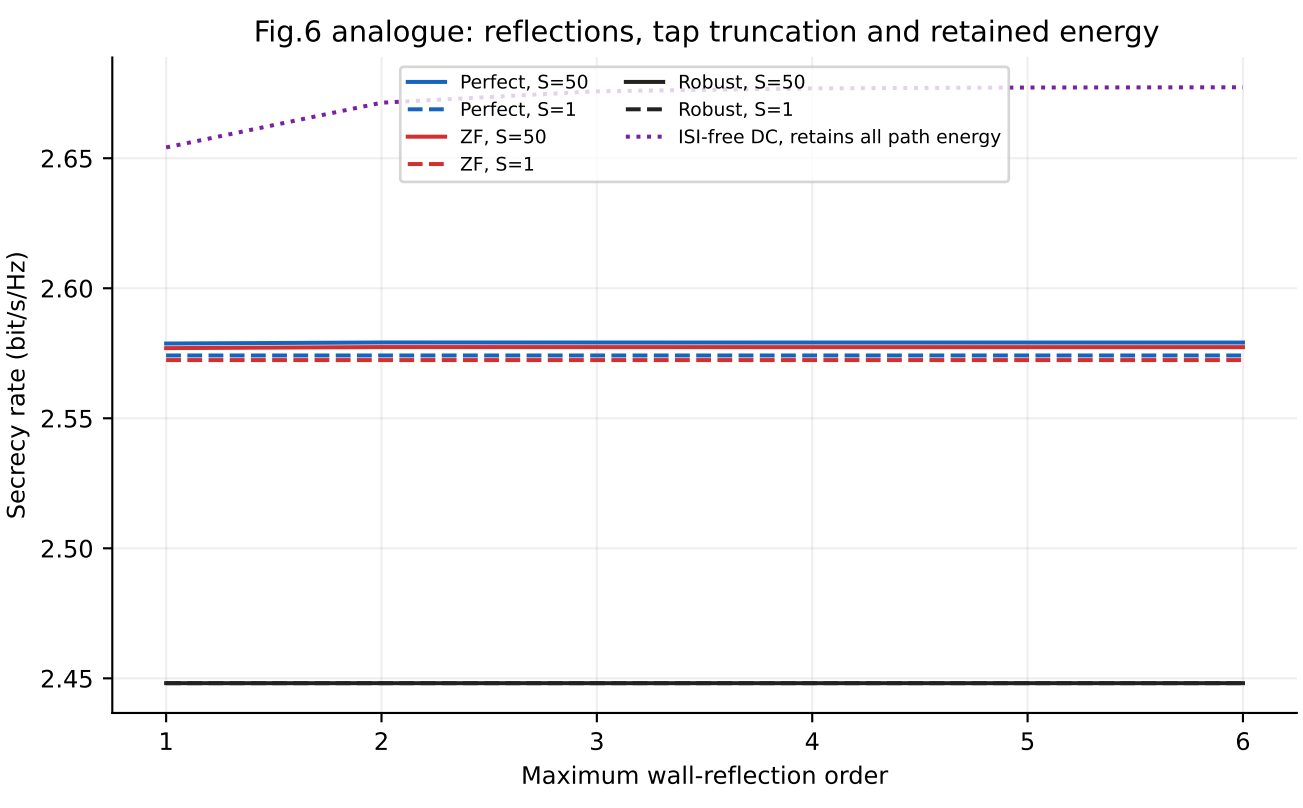
Fig.6 analogue: reflections, tap truncation and retained energy
Perfect, S=50
Perfect, S=1
ZF, S=50
ZF, S=1
Robust, S=50
Robust, S=1
ISI-free DC, retains all path energy
Secrecy rate (bit/s/Hz)
2.65
2.60
2.55
2.50
2.45
1
2
3
4
5
6
Maximum wall-reflection order