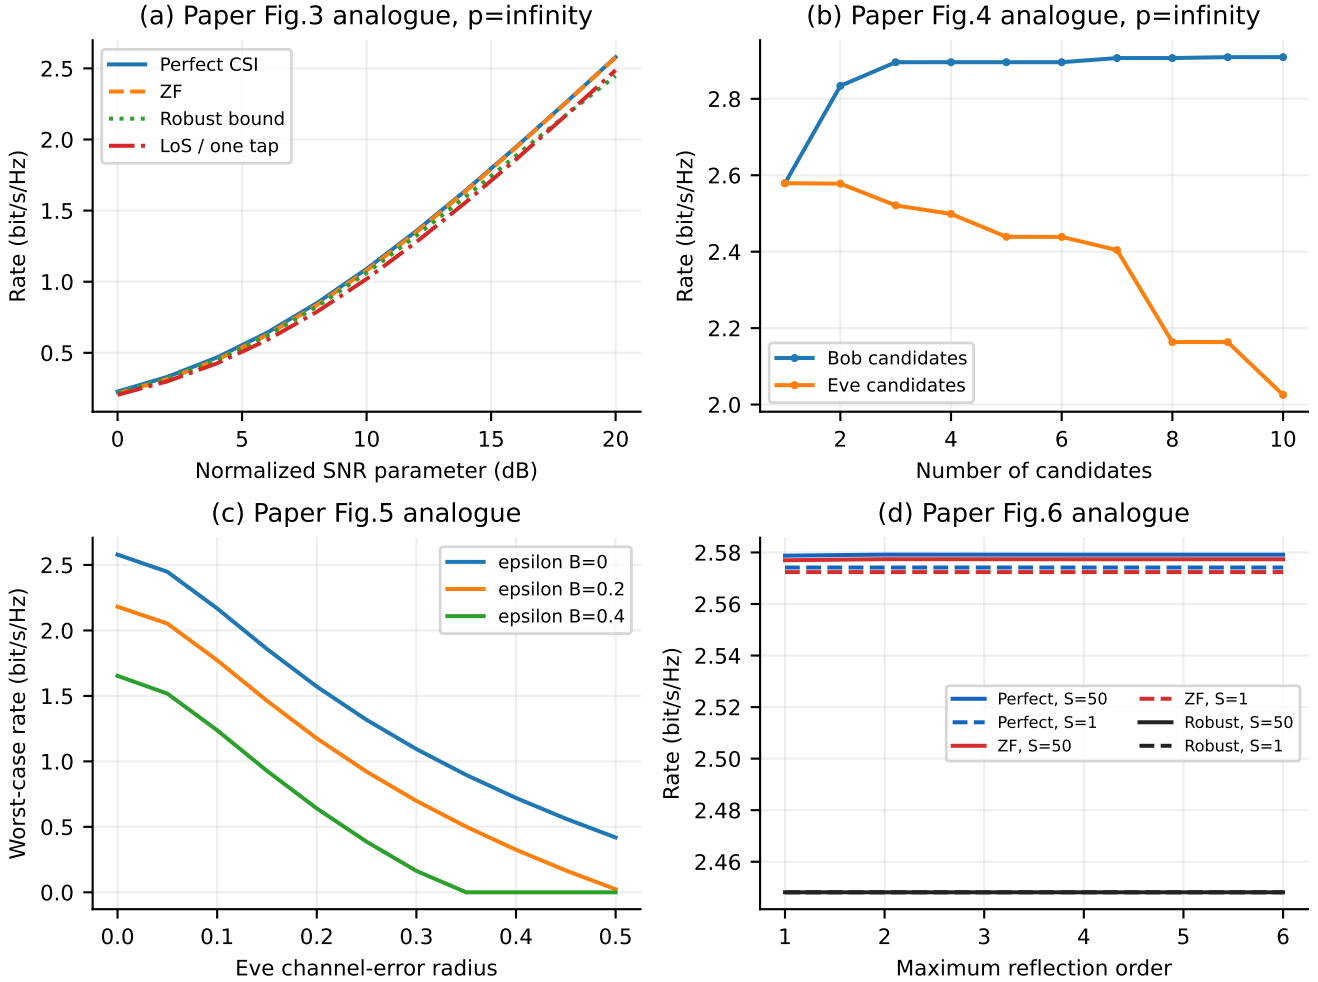
(a) Paper Fig.3 analogue, p=infinity
Perfect CSI
ZF
Robust bound
LoS / one tap
Rate (bit/s/Hz)
Normalized SNR parameter (dB)
(b) Paper Fig.4 analogue, p=infinity
Bob candidates
Eve candidates
Rate (bit/s/Hz)
Number of candidates
(c) Paper Fig.5 analogue
epsilon B=0
epsilon B=0.2
epsilon B=0.4
Worst-case rate (bit/s/Hz)
Eve channel-error radius
(d) Paper Fig.6 analogue
Perfect, S=50
Perfect, S=1
ZF, S=50
ZF, S=1
Robust, S=50
Robust, S=1
Rate (bit/s/Hz)
Maximum reflection order