

# MOS hands-on

Themiya Nanayakkara



# NIRSpec MOS hands-on



- Multi-object spectroscopy of distant galaxies
- In this hands-on session you will be asked to use
  - ▶ The **Astronomer's Proposal Tool** (APT)
  - ▶ More specifically, the **MOS Planning Tool** (MPT) which is part of the APT










Thinking about strategies - recap

# Shutter planning constraints




- Slit loss is a function of the relative location in the shutter
- MPT allows adjustment of the constraint on where sources can be placed in shutters

	Unconstrained (source may be behind the bar)	Entire open shutter area (default)	Midpoint	Constrained	Tightly constrained
					
Minimum relative flux transmission at 2.95μm	12%	30%	62%	75%	85%




# Nodding

- Open **slitlets** in cross-dispersion direction
- There are four selectable slitlets in MPT: 1, 2, **3**, 5
- Telescope is repositioned slightly between exposures
  - No MSA re-configuration
  - Background subtraction between nodded exposures
  - Improves PSF sampling and bad pixel mitigation
- The spectrum from a slitlet will be segmented, with bar shadows between the individual shutters

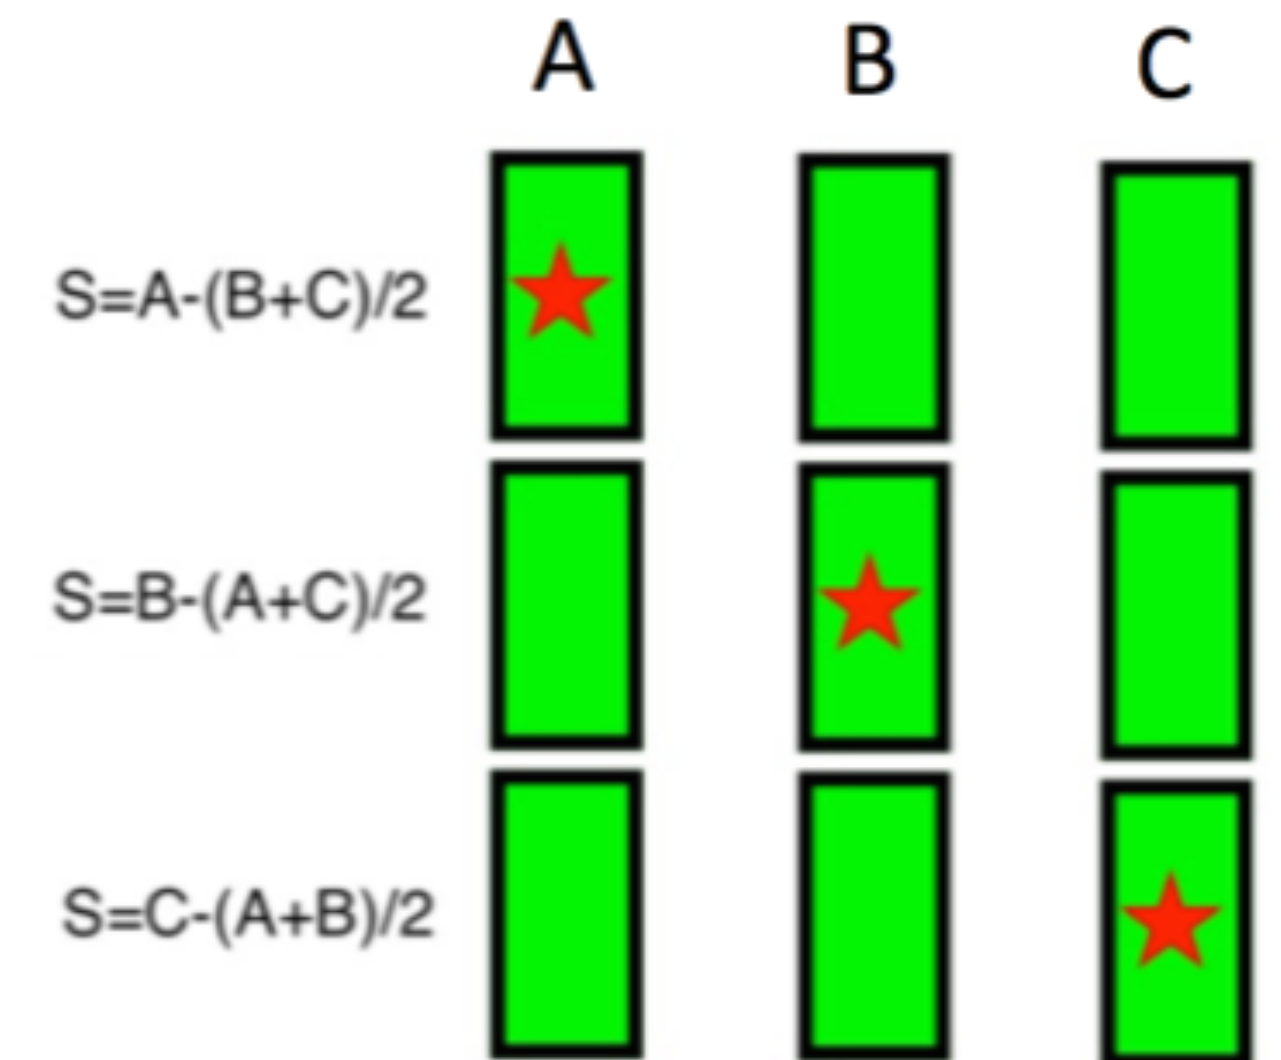

# Dithering (fixed dither)

- Telescope repointed and MSA re-configured so many of the same sources fall in different shutters
  - Can be used to cover the wavelength gap
  - Improves PSF sampling and mitigates bad pixels
  - Allows observation of additional sources e.g. those behind shutter bars or the MSA mounting plate
  - Can mitigate effects of light leakage through MSA
- During optimisation, MPT will attempt to observe as many sources as possible at all dithers
- **Nodding and dithering can be used alone or together**

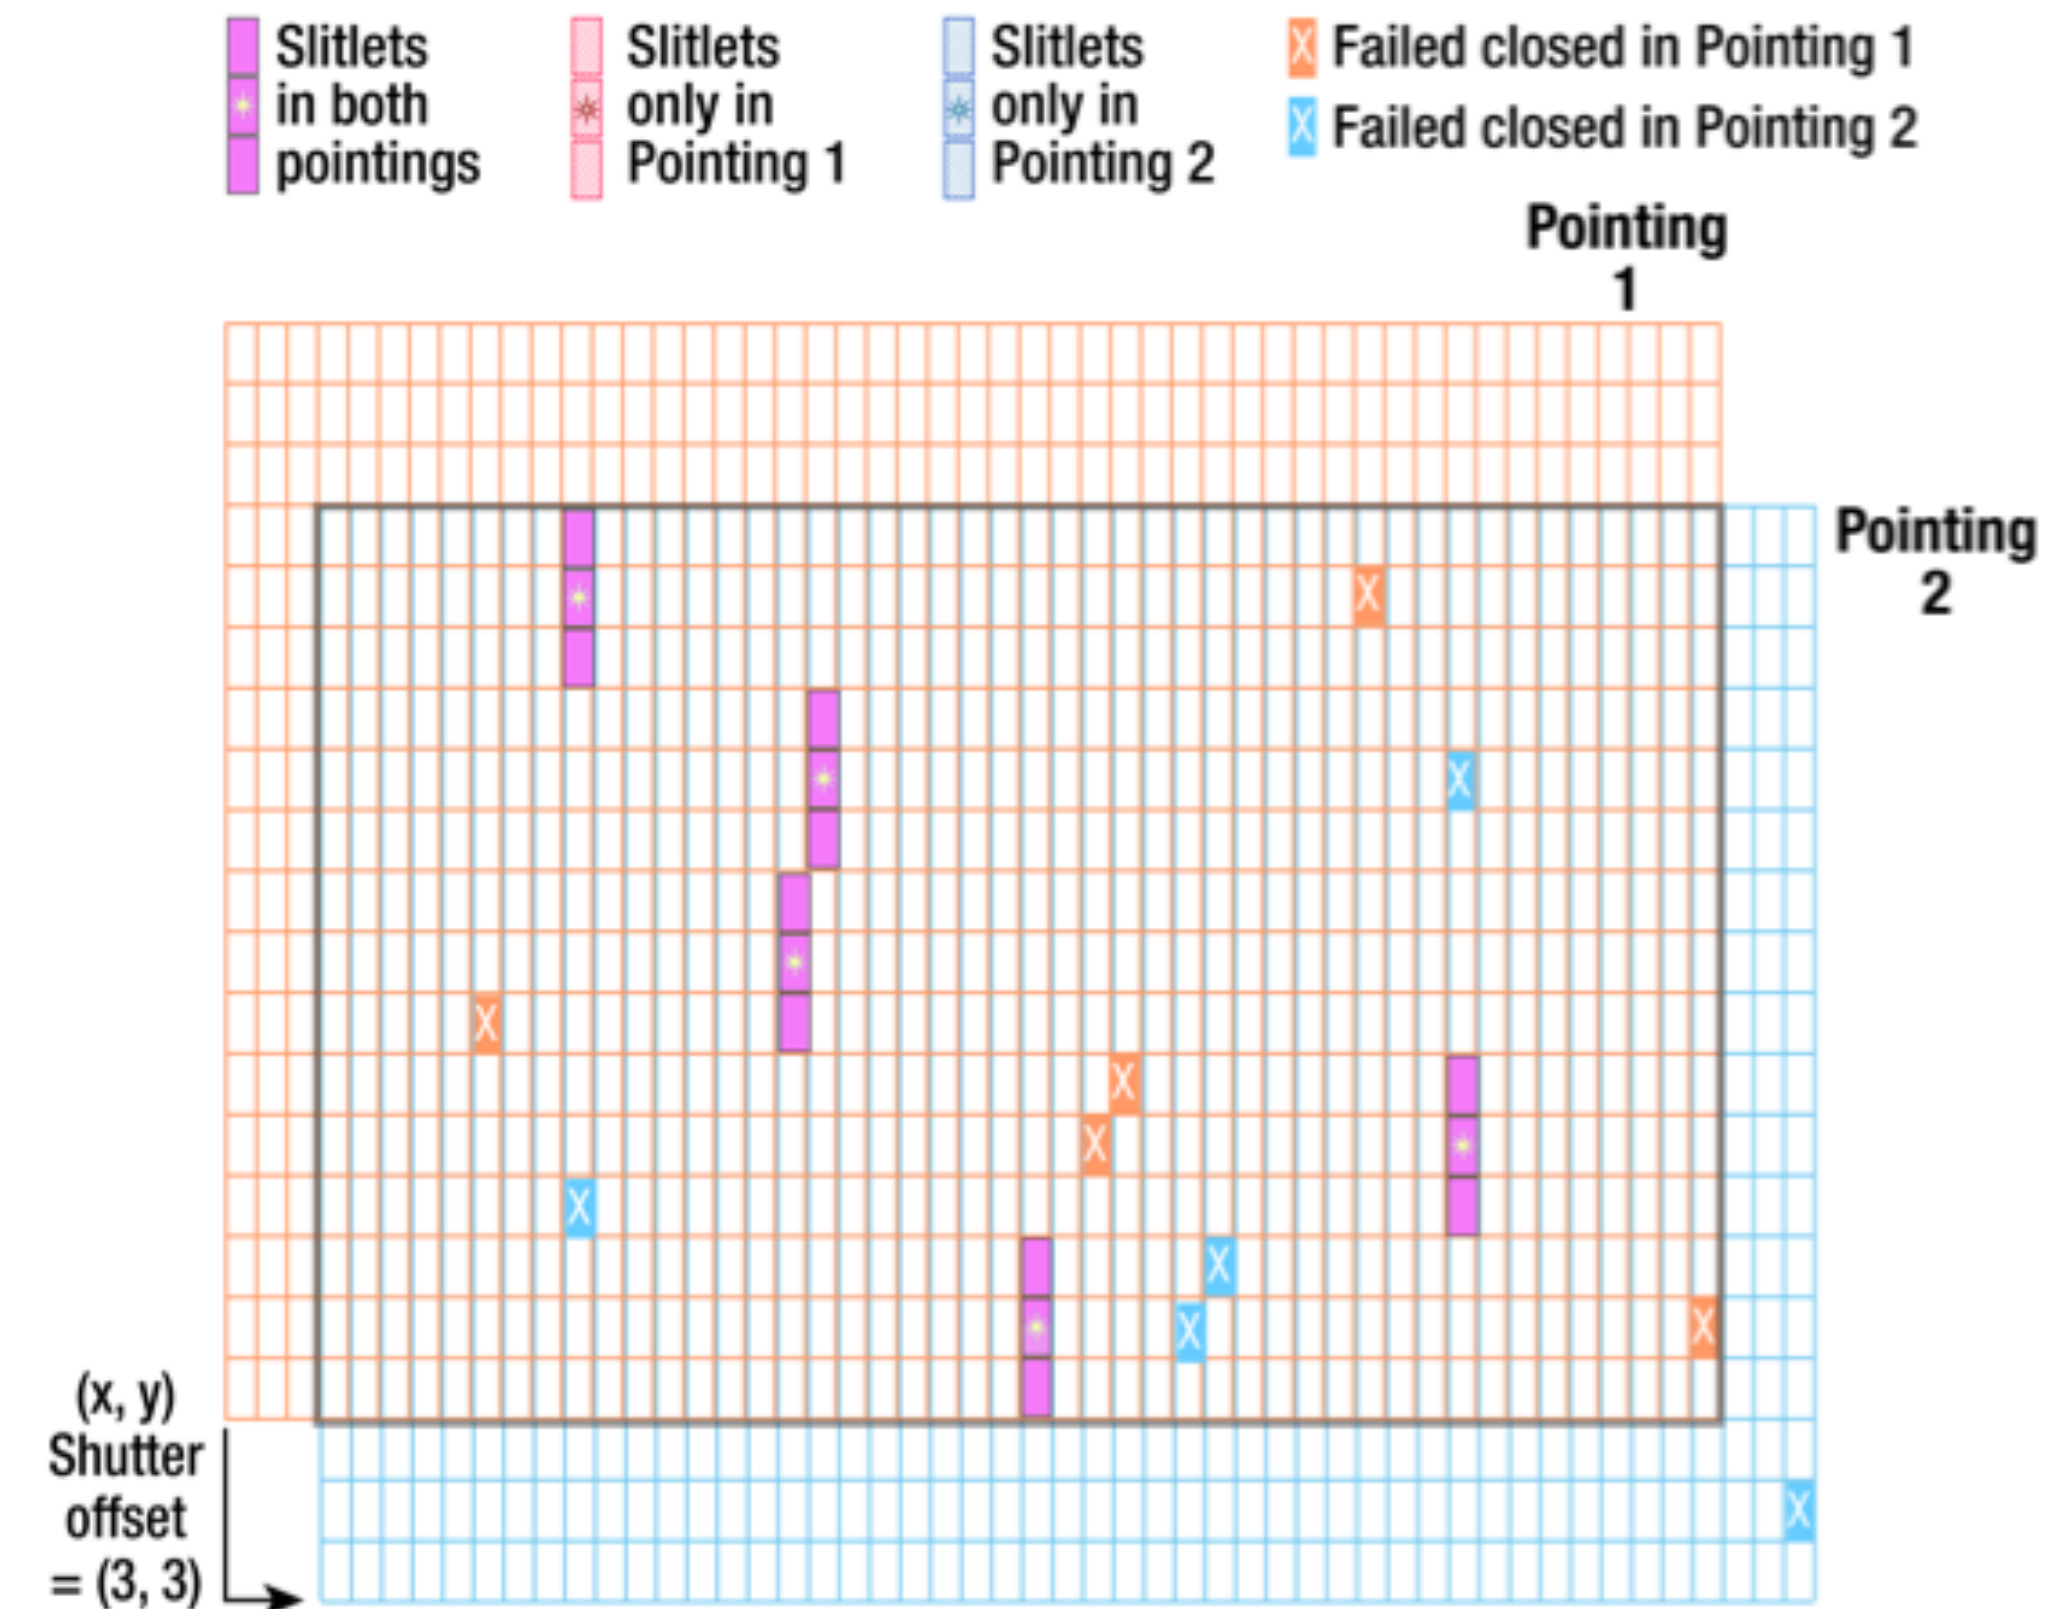




# Target acquisition



- **MSATA** is expected to be the usual TA method for the MOS
  - uses 5-8 reference stars over the entire MSA FoV
  - 8 chosen as a trade-off between TA accuracy and overheads
- MPT used to select reference stars at the assigned APA that will not be behind MSA bars or in failed shutters. This vetting is done at the Visit level at the first pointing in the Visit

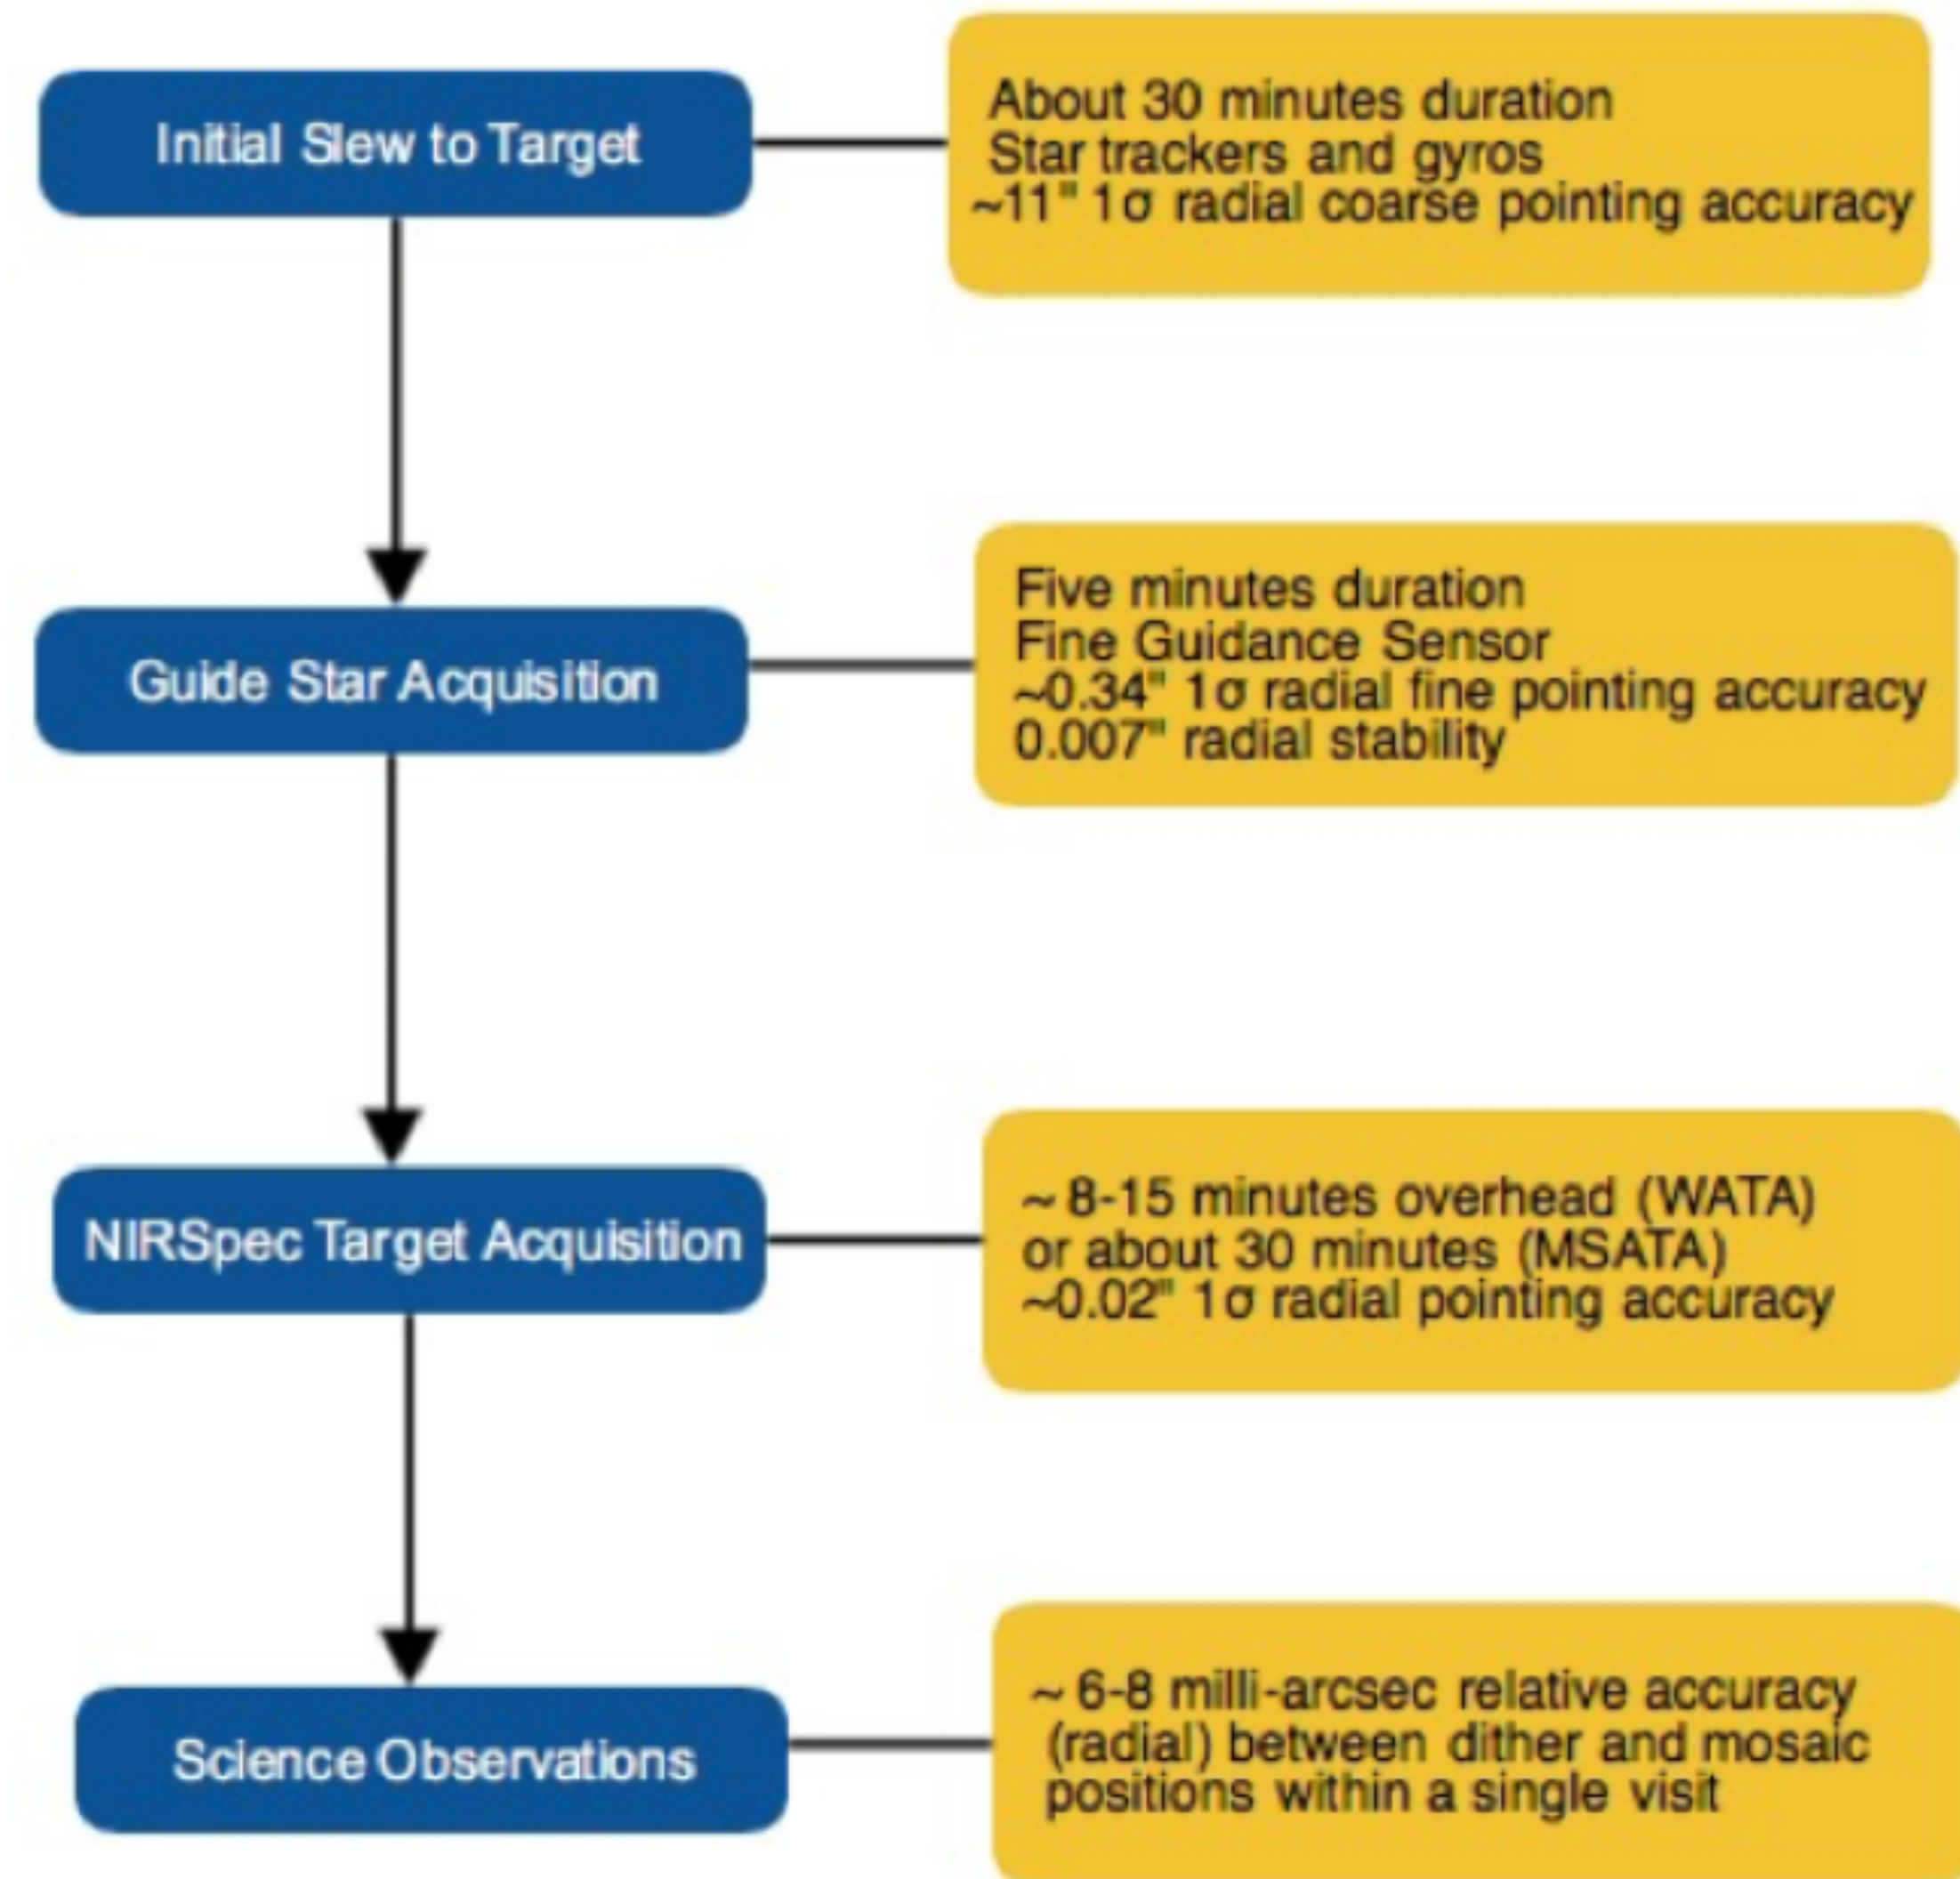

# Pre-imaging with NIRCcam



- Is imaging available with
  - deep enough to identify sources?
  - wide enough to fill the MSA and plan reference stars?
  - accurate enough astrometry to plan MOS?
- If not, request **NIRCcam pre-imaging** in your proposal
  - accurate enough astrometry to plan MOS?
  - NIRCcam image should be large enough to allow for any NIRSspec APA
    - Ideally 5x5 arcmin
    - typically a 2x1 mosaic + dithers to cover gaps
  - NIRCcam observations must be flight ready at proposal submission





# Getting started

# Getting started



- Open a terminal and go to a folder dedicated for the workshop:
- > git clone --branch handson
  - Open APT
  - Load the catalogue
  - Set-up the MPT Planner
  - Generate the plan
  - Create the observation





Further reading

# MOS/MPT Help and JDox



- JWST Help Desk: <https://jwsthhelp.stsci.edu>
- JDox Home page: <https://jwst-docs.stsci.edu/>
  - Updated for the new version of APT/MPT
- Specific MOS/MPT materials:
  - [MOS Roadmap](#)
  - [Multi-Object Spectroscopy](#)
  - [NIRSpec MOS Observing Process](#)
  - [NIRSpec MOS Operations](#)
    - Catalogues and Images
    - Pre-Imaging Using NIRCcam
    - Confirmation Images
    - Slit Losses
  - [NIRSpec MOS Recommended Strategies](#)
  - [MOS APT Template](#)