

# 10W Floodlight with PIR sensor

Product Code: FLED10WS

Barcode: 600284405 8494



- 120° beam angle
- 12m IR range
- Adjustable
- PIR sensor included
- Low wattage in comparison to Halogen lights

## The flood light


Ideal for lighting buildings, car parks, plazas, billboards, signs, factory premises, farming applications and much more. Equipped with safety glass cover lens with silicon seal. 240V IP65 adjustable 10WS LED floodlight with PIR sensor.

## Halogen/HID and LED comparison table

	Power (watt)	Power consumption based on 10 working hours a day	Lifetime (hours)	Lifetime cost (spanning LED lifetime)
Halogen	100	R30.42 p/month	2000	R2 500
LED	10	R3.04 p/month	25 000	R250
Halogen	200	R60.83 p/month	2000	R5000
LED	20	R6.08 p/month	25 000	R500
Halogen	300	R91.25 p/month	2000	R7 500
LED	30	R9.13 p/month	25 000	R750
HID	70	R21.29 p/month	2000	R1 750
LED	50	R15.21 p/month	25 000	R1 250
HID	150	R45.63 p/month	2000	R3 750
LED	80	R24.33 p/month	25 000	R2 000
HID	250	R76.04 p/month	2000	R6 250
LED	120	R36.50 p/month	25 000	R3 000

■ Electricity costs based on R1.00 per kWh

## Floodlight sensor operation

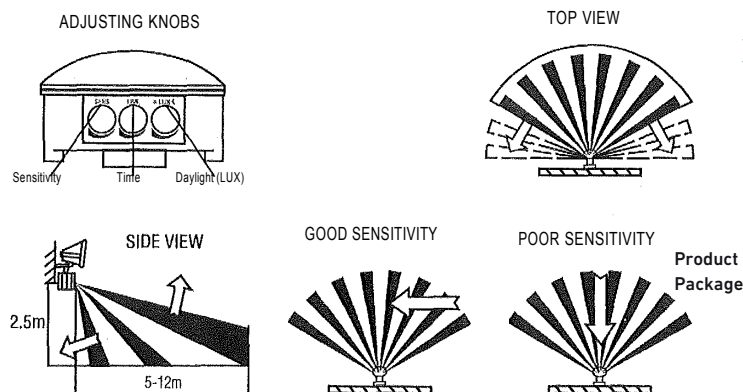

**AURORA**  
engineered & manufactured



## TECHNICAL INFORMATION

Materials	: AL+toughened glass
PCB materials	: FR-4
Working current (mA)	: 320mA
Input voltage (V)	: 90-264V
Power (W)	: 10W
Luminous flux (lm)	: 650lm
Color temperature (K)	: 3000-3500K 6000-6500K
CRI	: ≥70
Working temperature (C)	: -25 °C ~ 45 °C
Storage temperature (C)	: -40 °C ~ 80 °C
Beam angle	: 120°
LED quantity	: 1

## IMPORTANT NOTE

Installation must be done by a certified electrician if connected to a property's electrical mains.

## THE KIT CONTAINS

1 x Floodlight unit with sensor and mounting bracket

## PACKAGING DIMENSIONS

Weight (kg)	Length (mm)	Width (mm)	Height (mm)
1	80	115	166
	205	157	120

www.ellies.co.za

Brought to you by **ELLIES**

**ELLIES**