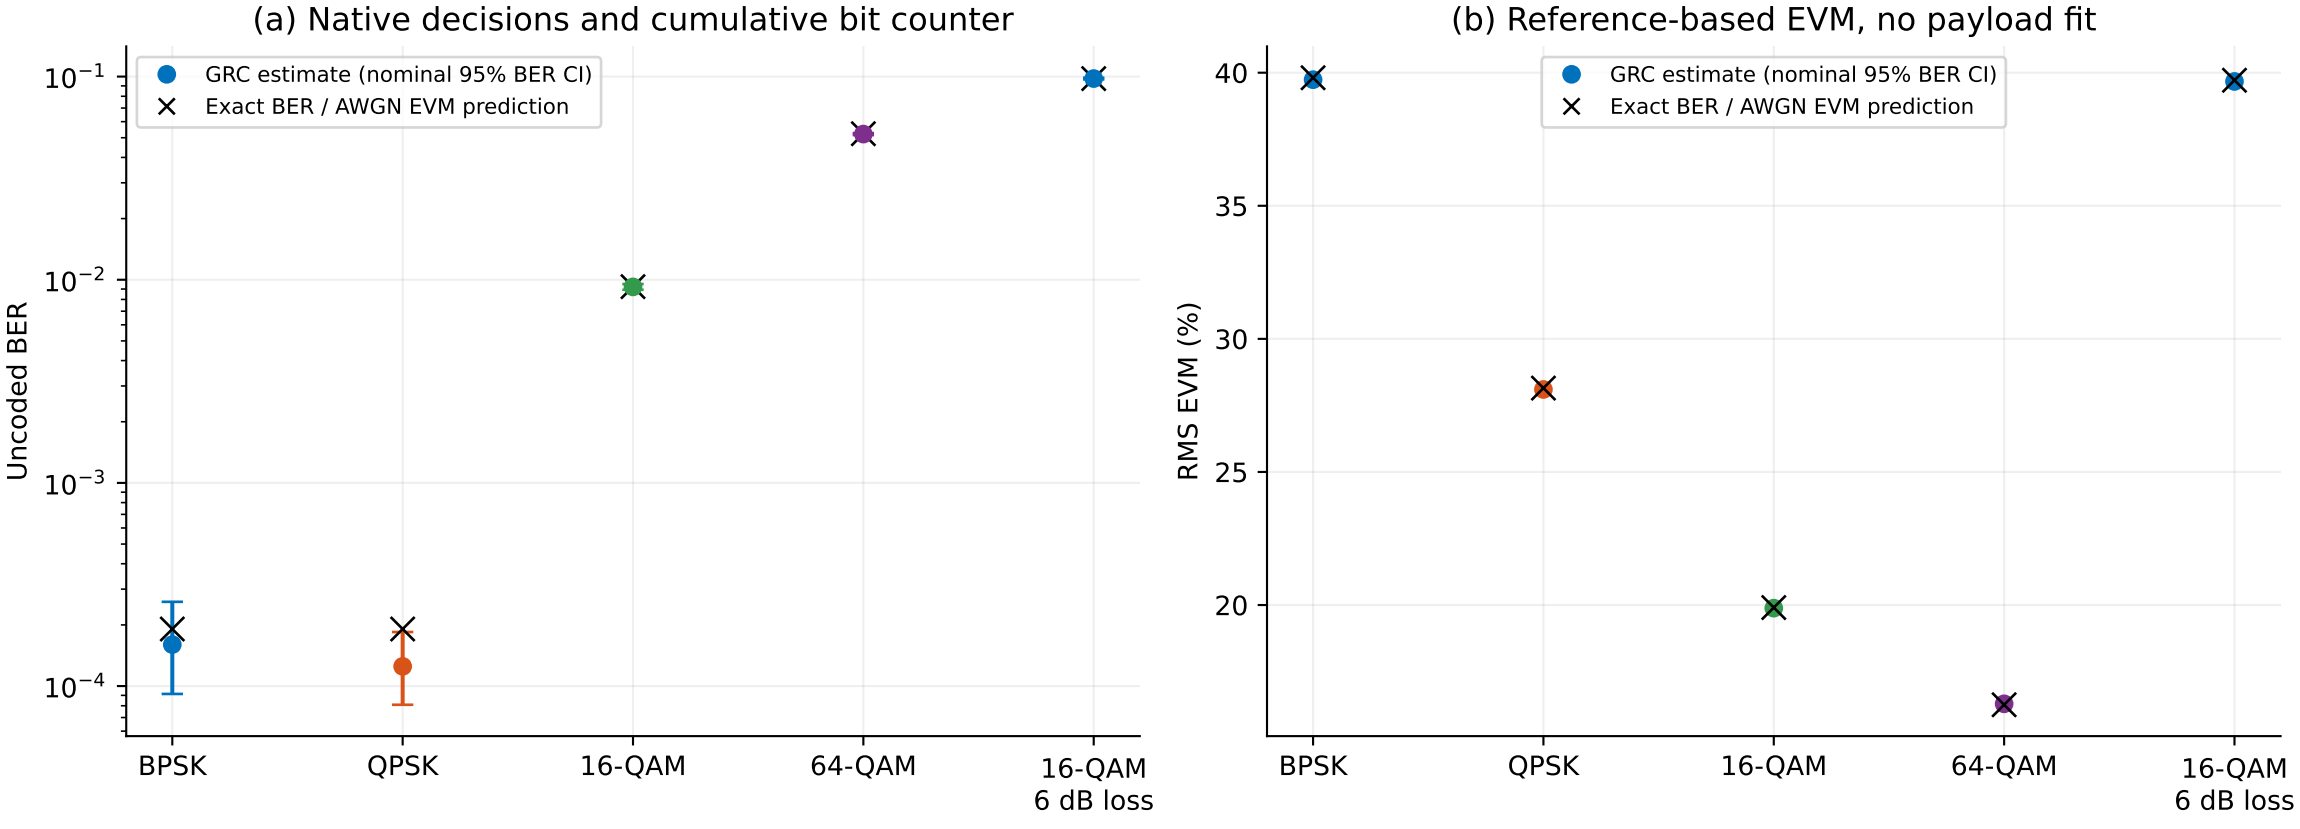Figure S3. Complete SISO modem: fixed TX Es = 1 and TX-reference Eb/N0 = 8 dB
100,000 symbols/case; the last case changes only channel loss