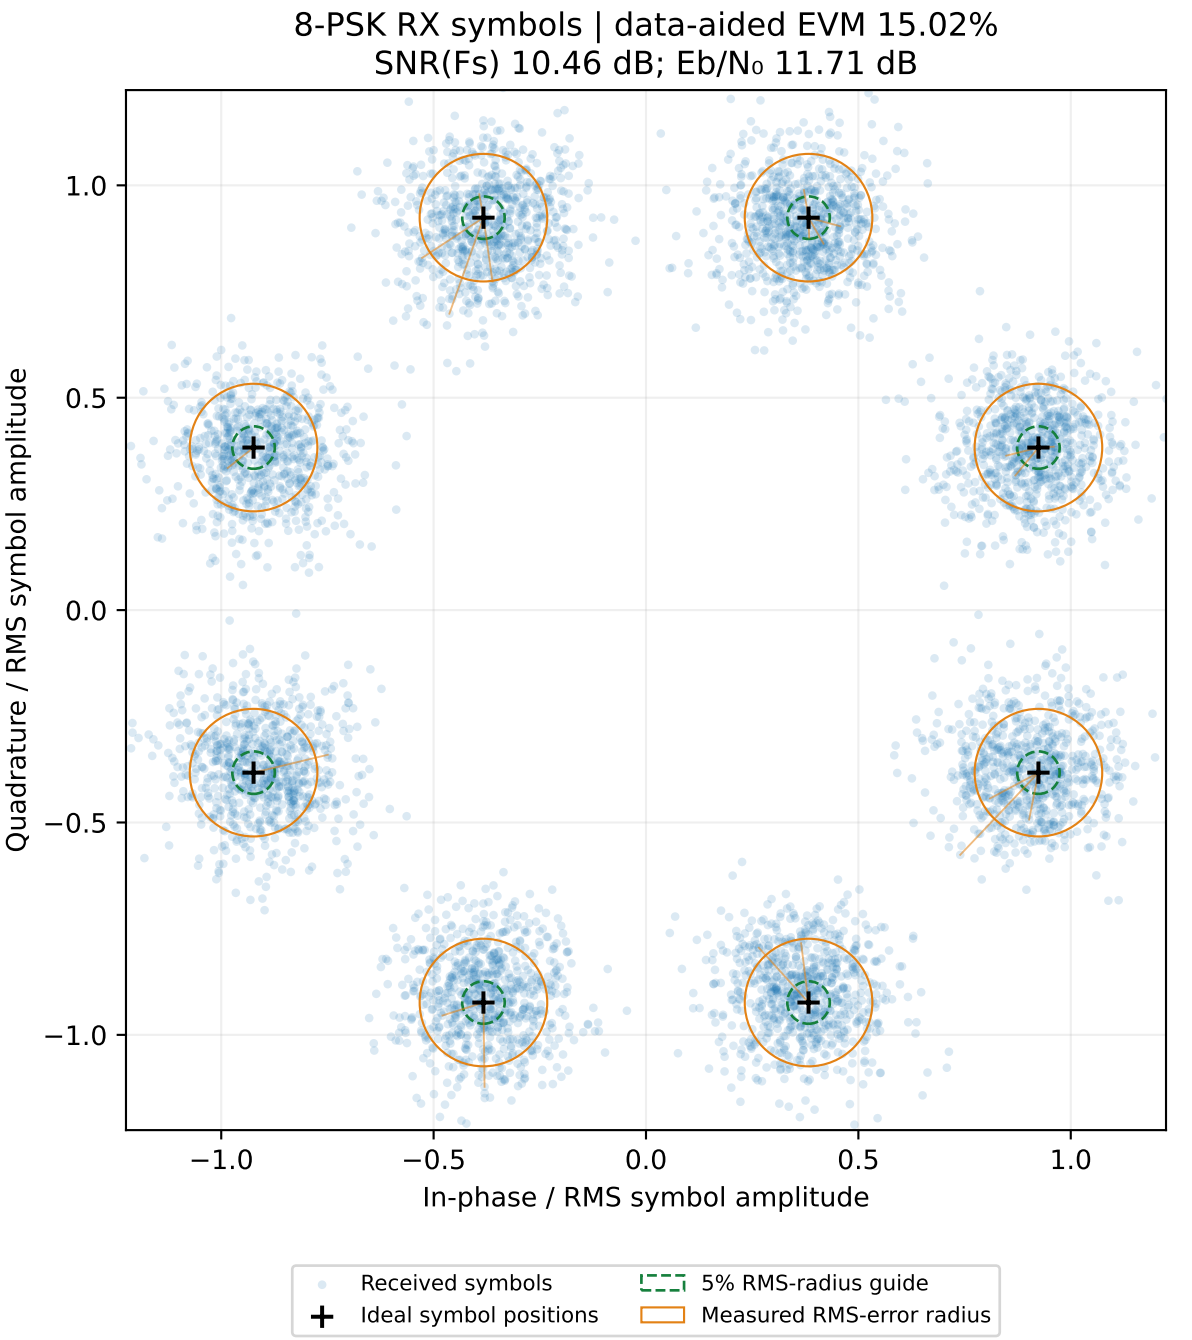

8-PSK RX symbols | data-aided EVM 15.02%
SNR(Fs) 10.46 dB; Eb/N₀ 11.71 dB
Quadrature / RMS symbol amplitude
In-phase / RMS symbol amplitude
1.0
0.5
0.0
−0.5
−1.0
−1.0
−0.5
0.0
0.5
1.0
Received symbols
Ideal symbol positions
5% RMS-radius guide
Measured RMS-error radius