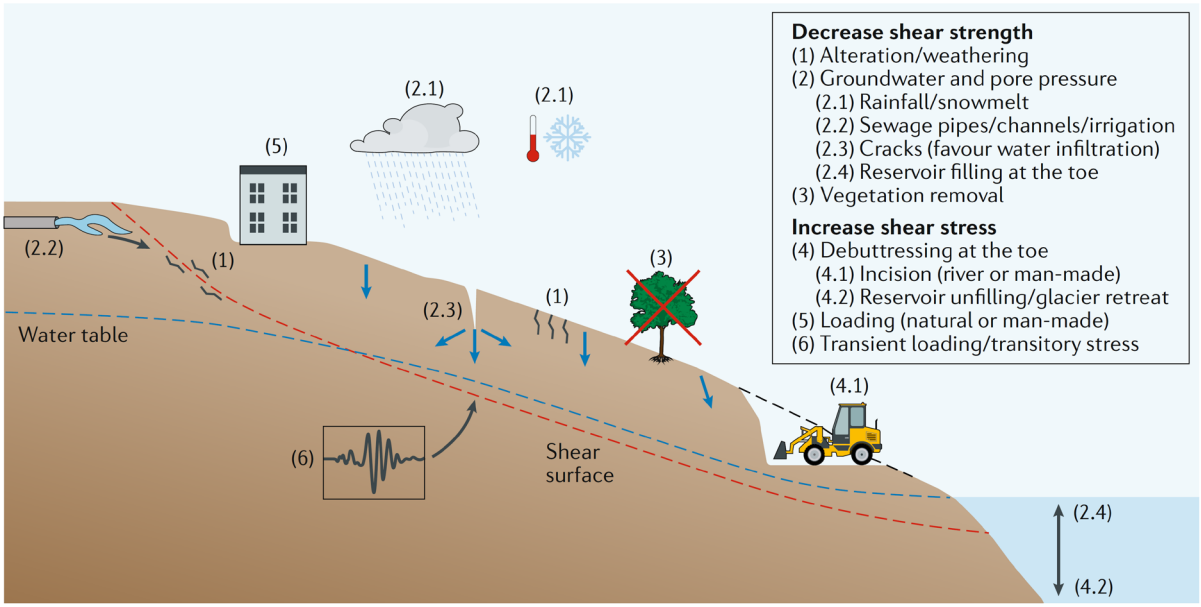


Figure 13: *Stability Schematic demonstrating the possible forcings of landslides. Source Lacroix et al., 2020.*

In order to reduce the probability of triggering, mitigation measures which aim to reduce the hazard of landslides occurring must act in the system in the opposite direction, by:

- A: increasing the resisting forces; and/or
- B: decreasing the driving forces.

While this could provide a first step in the classification of this type of mitigation measures, it is more convenient to classify them on the basis of the physical process involved. In particular, it is here recommended to distinguish between the classes indicated in Table 14. In Appendix 2 we propose extra information on the mitigation approaches to reduce the hazard.

Retaining structures are used extensively and can be considered as an additional class of hazard mitigation measures, even though they are used as means to modify slope geometry and/or to transfer load to more competent strata, rather than to address a specific physical process.