The basic idea of these measures is to intercept the sliding or falling material, or at least to deviate it, in order to protect existing elements at risk or points of particular interest located downslope of a potential landslide. Typical measures includes:

- Diversion channels;
- Re-modelling of the slope;
- Planting and vegetation on the slope;
- Catch trenches;
- Rockfall barriers;
- Rockfall nets (or Drapery)
- Rock sheds.

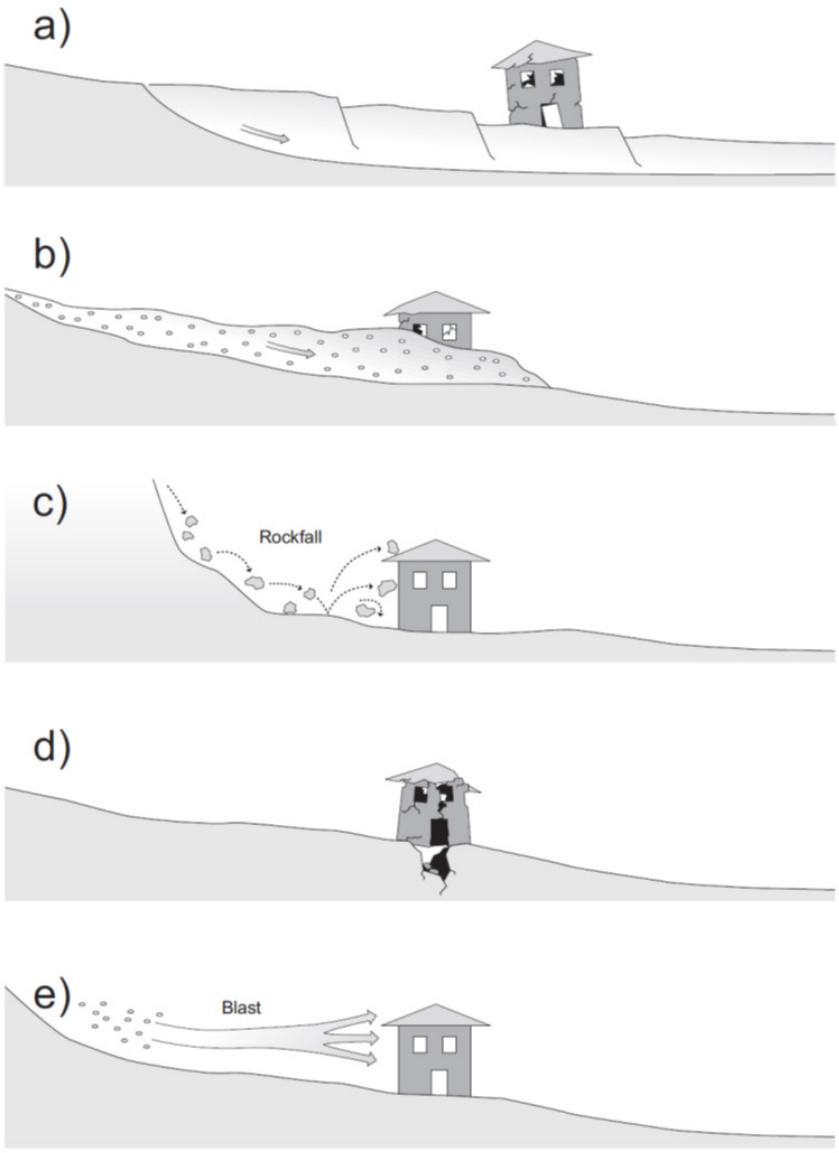


Figure 14: *Schematic representation of structural damage to buildings for different landslide types. Damage is assigned to slide and flow processes (a), to flows (b), to falls and topples (c), to subsidence (d), and to rock avalanches or large rock failures (e). Source: Glade and Crozier, 2005.*