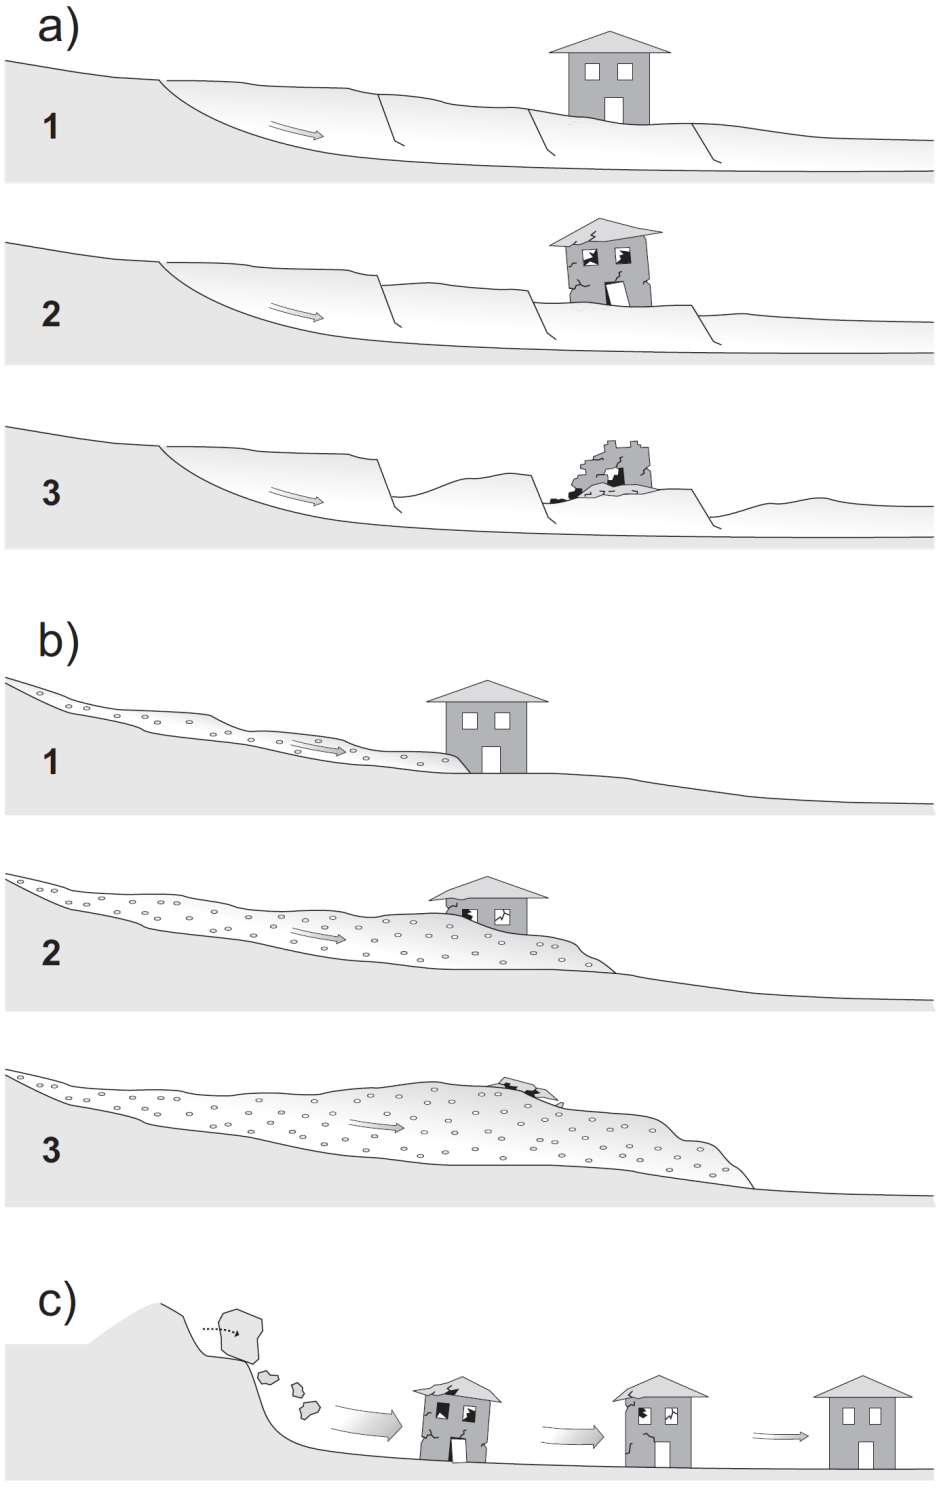


Figure 15: *Schematic consequences of different velocities of movement for different landslide types. A slide creeps (a.1) or fails suddenly (a.3). A debris flow progresses in low (b.1) or high velocities (b.3) with respective changes in flow height. A slow or fast moving rock fall damages, depending on the size and consequent momentum, elements at risk to a different degree (c). The degree depends on the distance between the process and the location of the element at risk. Source: Glade and Crozier, 2005.*