

paper yoyos quasi-static model

Brandon Wong, Ben Foster

August 18, 2026

1 Geometric model

The system can be modelled as a constant-width rectangular ribbon of negligible thickness wrapped around a uniform-radius cylinder at a uniform pitch. One end of the ribbon is fixed in place to prevent rigid body motion, while the other (“active” end) is displaced in the z direction (the axis of the cylinder). Refer to Figure 1 for a visual representation of the system. The system has the following geometric constants:

- L : the length of the unrolled rectangle.
- W : the width of the unrolled rectangle. Assume $L \gg W$.
- θ_L : the total wind angle of the helix, which is fixed based on the boundary conditions (the two ends of the ribbon cannot rotate about the z -axis relative to one another, only translate along it, so the total number of turns is a fixed topological property of how the ribbon was wound and does not change as it is pulled). $\theta_L = 2\pi n$ where n is the number of winds around the z axis (not necessarily integer).

The state of the system is parametrized by the parameter x , which describes how far the active end has displaced in the z direction relative to the base end.

1.1 Coordinate systems

Positions on the helix can be described with local surface u, v coordinates, which describe the unrolled rectangle. The u direction runs along the length of the unrolled rectangle, and the v direction runs across its width. Alternatively, positions can be described in 3d space using cylindrical r, θ, z coordinates.

To simplify the geometry, we assume that the helix has a constant radius r and a constant pitch angle ϕ (the angle the local $\hat{u}$ makes with the r, θ plane). Equivalently, the local orthonormal frame $(\hat{u}, \hat{v})$ tangent to the ribbon surface is related to the cylinder’s own natural frame $(\hat{\theta}, \hat{z})$ by a rotation through the angle ϕ :

$$\hat{u} = \cos \phi \hat{\theta} + \sin \phi \hat{z}, \quad \hat{v} = -\sin \phi \hat{\theta} + \cos \phi \hat{z}. \quad (1)$$

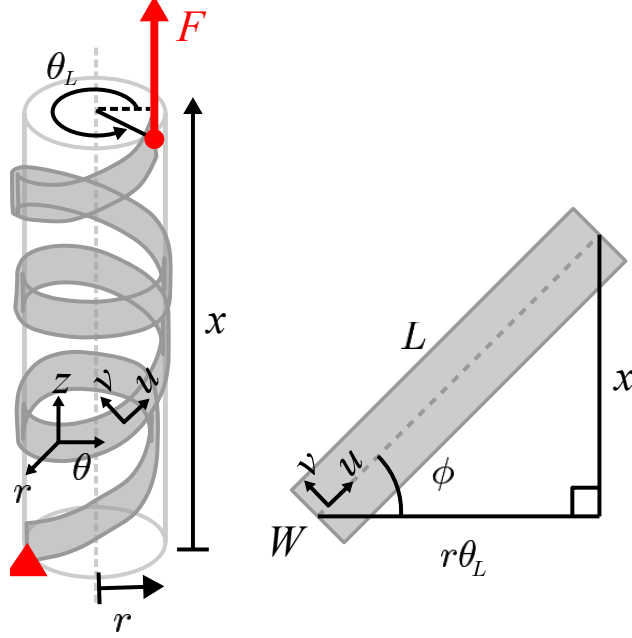


Figure 1: in progress

We now use Eq. (1) to relate the geometric constants L, θ_L to the pitch angle ϕ and radius r at a given extension x . From Eq. (1), $\hat{u}$ has z -component $\sin \phi$, so moving a distance du along the ribbon's own length produces an axial displacement $dz = \sin \phi du$. Since ϕ is constant along the whole ribbon at a given (frozen) extension x , integrating this from the base end ($u = 0$) to the active end ($u = L$) gives a total axial displacement of $L \sin \phi$. By definition, this total axial displacement between the two ends of the ribbon is exactly x , so

$$x = L \sin \phi \quad \implies \quad \phi = \sin^{-1} \left(\frac{x}{L} \right). \quad (2)$$

Likewise, $\hat{u}$ has θ -component $\cos \phi$, so moving a distance du along the ribbon produces a circumferential arc length $r d\theta = \cos \phi du$. Integrating over the whole ribbon length L , the ribbon sweeps out a total circumferential arc length $L \cos \phi$. This total arc length must also equal $r \theta_L$ (arc length equals radius times swept angle), since by construction the ribbon winds through the fixed total angle θ_L regardless of x . Equating the two expressions for this arc length and using $\cos \phi = \sqrt{1 - \sin^2 \phi}$ together with Eq. (2) gives

$$r \theta_L = L \cos \phi \quad \implies \quad r = \frac{L}{\theta_L} \cos \phi = \frac{L}{\theta_L} \sqrt{1 - \frac{x^2}{L^2}} = \frac{\sqrt{L^2 - x^2}}{\theta_L}. \quad (3)$$

1.2 Position vector

An area element $du \times dv$ at point (u, v) has a position vector given in cylindrical coordinates. We build this up from Eq. (1): since $\hat{u} = \cos \phi \hat{\theta} + \sin \phi \hat{z}$, moving along the ribbon by du produces $r d\theta = \cos \phi du$ and $dz = \sin \phi du$; since $\hat{v} = -\sin \phi \hat{\theta} + \cos \phi \hat{z}$, moving across the width by dv produces $r d\theta = -\sin \phi dv$ and $dz = \cos \phi dv$. Integrating these (at fixed, frozen x , so r and ϕ are

constants) from the reference point $(u, v) = (0, 0)$ gives

$$\vec{p}(u, v, x) = \begin{bmatrix} r \\ \theta \\ z \end{bmatrix} = \begin{bmatrix} \frac{\sqrt{L^2 - x^2}}{\theta_L} \\ \frac{u \cos \phi - v \sin \phi}{r} \\ u \sin \phi + v \cos \phi \end{bmatrix}. \quad (4)$$

1.3 Local curvature

A cylinder of radius r has two principal curvatures: $\kappa_\theta = 1/r$ in the circumferential ($\hat{\theta}$) direction in which it is rolled, and $\kappa_z = 0$ in the axial ($\hat{z}$) direction in which it is completely flat. Equivalently, the standard cylindrical basis vectors rotate with θ at the rates

$$\frac{\partial \hat{r}}{\partial \theta} = \hat{\theta}, \quad \frac{\partial \hat{\theta}}{\partial \theta} = -\hat{r}, \quad \frac{\partial \hat{z}}{\partial \theta} = 0, \quad (5)$$

(the first two follow from writing $\hat{r} = \cos \theta \hat{x} + \sin \theta \hat{y}$ and $\hat{\theta} = -\sin \theta \hat{x} + \cos \theta \hat{y}$ in terms of the fixed Cartesian basis and differentiating; the third holds because $\hat{z}$ does not depend on θ at all — this is exactly the statement $\kappa_z = 0$).

To differentiate the ribbon's own frame $(\hat{u}, \hat{v}, \hat{r})$ with respect to (u, v) we use the chain rule through θ . From $\theta(u, v) = (u \cos \phi - v \sin \phi)/r$ (Eq. 4), holding x — hence ϕ, r — fixed,

$$\frac{\partial \theta}{\partial u} = \frac{\cos \phi}{r}, \quad \frac{\partial \theta}{\partial v} = -\frac{\sin \phi}{r}. \quad (6)$$

Combining Eq. (5) and Eq. (6) via the chain rule (e.g. $\partial \hat{r} / \partial u = (\partial \hat{r} / \partial \theta)(\partial \theta / \partial u)$) gives

$$\frac{\partial \hat{r}}{\partial u} = \frac{\cos \phi}{r} \hat{\theta}, \quad \frac{\partial \hat{r}}{\partial v} = -\frac{\sin \phi}{r} \hat{\theta}, \quad \frac{\partial \hat{\theta}}{\partial u} = -\frac{\cos \phi}{r} \hat{r}, \quad \frac{\partial \hat{\theta}}{\partial v} = \frac{\sin \phi}{r} \hat{r}, \quad (7)$$

with $\hat{z}$ constant in u, v throughout. Now differentiate $\hat{u}, \hat{v}$ themselves, using $\hat{u} = \cos \phi \hat{\theta} + \sin \phi \hat{z}$, $\hat{v} = -\sin \phi \hat{\theta} + \cos \phi \hat{z}$ (Eq. 1) with ϕ held fixed:

$$\begin{aligned} \frac{\partial \hat{u}}{\partial u} &= \cos \phi \frac{\partial \hat{\theta}}{\partial u} = -\frac{\cos^2 \phi}{r} \hat{r}, & \frac{\partial \hat{u}}{\partial v} &= \cos \phi \frac{\partial \hat{\theta}}{\partial v} = \frac{\sin \phi \cos \phi}{r} \hat{r}, \\ \frac{\partial \hat{v}}{\partial u} &= -\sin \phi \frac{\partial \hat{\theta}}{\partial u} = \frac{\sin \phi \cos \phi}{r} \hat{r}, & \frac{\partial \hat{v}}{\partial v} &= -\sin \phi \frac{\partial \hat{\theta}}{\partial v} = -\frac{\sin^2 \phi}{r} \hat{r}. \end{aligned} \quad (8)$$

The same three coefficients, $\cos^2 \phi / r$, $\sin^2 \phi / r$, and $\sin \phi \cos \phi / r$ (the last one twice), keep reappearing; we name them for convenience,

$$\kappa_{uu} := \frac{\cos^2 \phi}{r}, \quad \kappa_{vv} := \frac{\sin^2 \phi}{r}, \quad \kappa_{uv} := \frac{\sin \phi \cos \phi}{r}, \quad (9)$$

so that Eq. (8) reads $\partial \hat{u} / \partial u = -\kappa_{uu} \hat{r}$, $\partial \hat{u} / \partial v = \kappa_{uv} \hat{r}$, $\partial \hat{v} / \partial u = \kappa_{uv} \hat{r}$, $\partial \hat{v} / \partial v = -\kappa_{vv} \hat{r}$.

What κ_{uv} means. κ_{uu} and κ_{vv} are the ordinary curvatures of the u - and v -coordinate curves themselves: κ_{uu} is how fast $\hat{u}$ tips toward $\hat{r}$ per unit distance moved *along* $\hat{u}$, and likewise κ_{vv} for

$\hat{v}$ along $\hat{v}$. κ_{uv} is instead a *cross* rate: how fast $\hat{u}$ tips toward $\hat{r}$ per unit distance moved in the v -direction — equivalently, how fast $\hat{v}$ tips toward $\hat{r}$ per unit distance moved in the u -direction, since Eq. (8) gives the same coefficient for both. It is not a slope like dv/du ; it has the same units (one over length) and the same geometric meaning as κ_{uu}, κ_{vv} — a rate at which a tangent direction tilts toward the surface normal — just for a mixed pair of directions rather than a single one.

Concretely, κ_{uv} arises above because $\hat{u}, \hat{v}$ are each a mix of $\hat{\theta}$ and $\hat{z}$ (Eq. 1), and only the $\hat{\theta}$ part of either vector rotates as θ changes ($\hat{z}$ does not, Eq. 5). Moving in v changes θ (Eq. 6), and therefore rotates the $\hat{\theta}$ -component of $\hat{u}$ toward $\hat{r}$ even though v is not $\hat{u}$'s own direction — that leftover rotation is exactly κ_{uv} . Put differently: $\hat{u}, \hat{v}$ are rotated by ϕ away from the cylinder's own principal directions $\hat{\theta}, \hat{z}$, which have no such cross term ($\hat{\theta}$ only ever rotates toward $\hat{r}$ as θ itself changes, never as z changes, and $\hat{z}$ never rotates at all); κ_{uv} is exactly the off-diagonal curvature this rotation introduces. Consistent with this, $\kappa_{uv} = \sin \phi \cos \phi / r$ vanishes at $\phi = 0, 90^\circ$ (where $\hat{u}, \hat{v}$ realign with $\hat{\theta}, \hat{z}$) and is largest at $\phi = 45^\circ$.

Rotation of $\hat{r}$. It remains to differentiate $\hat{r}$ itself. We already have $\partial \hat{r} / \partial u, \partial \hat{r} / \partial v$ in terms of $\hat{\theta}$ (Eq. 7); to express them in terms of $\hat{u}, \hat{v}$ instead, invert Eq. (1) for $\hat{\theta}$ (solving its two equations for $\hat{\theta}, \hat{z}$ in terms of $\hat{u}, \hat{v}$ gives $\hat{\theta} = \cos \phi \hat{u} - \sin \phi \hat{v}$). Substituting,

$$\frac{\partial \hat{r}}{\partial u} = \frac{\cos \phi}{r} \hat{\theta} = \frac{\cos \phi}{r} (\cos \phi \hat{u} - \sin \phi \hat{v}) = \kappa_{uu} \hat{u} - \kappa_{uv} \hat{v}, \quad (10)$$

and the identical substitution into $\partial \hat{r} / \partial v = -\frac{\sin \phi}{r} \hat{\theta}$ gives $\partial \hat{r} / \partial v = -\kappa_{uv} \hat{u} + \kappa_{vv} \hat{v}$. Collecting everything derived in this section,

$$\begin{aligned} \frac{\partial \hat{r}}{\partial u} &= \kappa_{uu} \hat{u} - \kappa_{uv} \hat{v}, & \frac{\partial \hat{r}}{\partial v} &= -\kappa_{uv} \hat{u} + \kappa_{vv} \hat{v}, \\ \frac{\partial \hat{u}}{\partial u} &= -\kappa_{uu} \hat{r}, & \frac{\partial \hat{u}}{\partial v} &= \kappa_{uv} \hat{r}, \\ \frac{\partial \hat{v}}{\partial u} &= \kappa_{uv} \hat{r}, & \frac{\partial \hat{v}}{\partial v} &= -\kappa_{vv} \hat{r}. \end{aligned} \quad (11)$$

Two features of Eq. (11) are worth flagging because they are used repeatedly below: (i) $\hat{u}, \hat{v}$ never rotate into each other ($\partial \hat{u} / \partial u$ and $\partial \hat{u} / \partial v$ have no $\hat{v}$ -component, and vice versa) — this holds because the u - and v -coordinate lines are straight lines on the flat unrolled rectangle, hence remain geodesics after the isometric wrapping into a helix, and a curve's own tangent frame only rotates toward the surface normal along a geodesic, never within the tangent plane; (ii) the rotation matrix is antisymmetric, e.g. $\partial \hat{u} / \partial u \cdot \hat{r} = -\partial \hat{r} / \partial u \cdot \hat{u}$, as required for any rotating orthonormal frame.

2 Stress balance

We will model the paper yoyo as a thin shell of small but finite thickness $t \ll r$. Because the ribbon's thickness ultimately carries the boundary tractions responsible for friction (Section 3), we work throughout with its full three-dimensional stress state. We use $\zeta \in [-t/2, t/2]$ for the coordinate measuring position through the thickness, i.e., displacement from the mid-surface along

$\hat{r}$: a general material point is at $\vec{p}(u, v, x) + \zeta \hat{r}(u, v)$, with $\vec{p}(u, v, x)$ the mid-surface position of Eq. (4).

2.1 The stress tensor

At a point (u, v, ζ) the material carries the full Cauchy stress tensor

$$\sigma = \begin{pmatrix} \sigma_{uu} & \sigma_{uv} & \sigma_{ur} \\ \sigma_{uv} & \sigma_{vv} & \sigma_{vr} \\ \sigma_{ur} & \sigma_{vr} & \sigma_{rr} \end{pmatrix}. \quad (12)$$

There are six independent components: the in-plane stresses $\sigma_{uu}, \sigma_{uv}, \sigma_{vv}$; the transverse shears σ_{ur}, σ_{vr} , by which the ribbon can transmit a load sideways from one part of its width to another; and σ_{rr} , the normal pressure caused by layer-layer contact at the ribbon's surface.

Static equilibrium gives three scalar force-balance equations, one per direction; we derive them in Sections 2.2 and 2.3. For now, we leave the boundary tractions at $\zeta = \pm t/2$ — that is, the friction and contact pressures transmitted between neighboring wound layers — as unknown functions of (u, v) of unspecified direction and magnitude, to be determined in Section 3; nothing in Sections 2.2–2.3 depends on that determination.

2.2 In-plane force balance

We perform a force balance on a differential volume element $du \times dv \times d\zeta$. On each of its six faces there is a traction vector: on the u -face (outward normal $\hat{u}$), the traction is $\vec{t}_u = \sigma_{uu}\hat{u} + \sigma_{uv}\hat{v} + \sigma_{ur}\hat{r}$, and similarly $\vec{t}_v = \sigma_{uv}\hat{u} + \sigma_{vv}\hat{v} + \sigma_{vr}\hat{r}$ on the v -face and $\vec{t}_\zeta = \sigma_{ur}\hat{u} + \sigma_{vr}\hat{v} + \sigma_{rr}\hat{r}$ on the ζ -face. Because $t \ll r$, the area of each face is independent of ζ ($dv d\zeta$, $du d\zeta$, $du dv$ respectively), so the net force on the element is

$$\left(\frac{\partial \vec{t}_u}{\partial u} + \frac{\partial \vec{t}_v}{\partial v} + \frac{\partial \vec{t}_\zeta}{\partial \zeta} \right) du dv d\zeta = 0. \quad (13)$$

Because $\hat{u}, \hat{v}, \hat{r}$ themselves depend on u, v (Eq. 11), differentiating $\vec{t}_u, \vec{t}_v$ produces extra terms beyond the plain derivatives of the stress components, in every direction alike ($\hat{u}$, $\hat{v}$, and, as Section 2.3 shows, $\hat{r}$ too). We work out the $\hat{u}$ -component first; the $\hat{v}$ -component follows by an identical argument, swapping $u \leftrightarrow v$ throughout (and, since $\kappa_{uv} = \kappa_{vu}$, changing only the sign on the cross term). Collecting the $\hat{u}$ -component of the sum (using Eq. 11; $\hat{u}, \hat{v}$ do not depend on ζ to leading order in t/r) gives

$$\frac{\partial \sigma_{uu}}{\partial u} + \frac{\partial \sigma_{uv}}{\partial v} + \frac{\partial \sigma_{ur}}{\partial \zeta} + \kappa_{uu}\sigma_{ur} - \kappa_{uv}\sigma_{vr} = 0. \quad (14)$$

This equation contains two kinds of term involving the transverse shears: their own ζ -derivative, and a curvature-weighted contribution ($\kappa_{uu}\sigma_{ur}$, etc.) with no derivative at all. The ζ -derivative term must be kept — integrating it through the thickness is exactly how the boundary tractions of Section 3 enter the in-plane balance, and dropping it would silently discard the friction mechanism entirely. The curvature-weighted terms, however, are negligible: transverse shear stresses in a thin shell are smaller than the in-plane stresses by a factor of order t/ℓ , where ℓ is the shortest relevant

length scale of variation (a standard thin-shell scaling result). A term like $\kappa_{uu}\sigma_{ur} \sim (1/r) \cdot \sigma_{uu}(t/\ell)$ is then smaller than the leading in-plane term $\partial\sigma_{uu}/\partial u \sim \sigma_{uu}/\ell$ by a factor of t/r , which is small for a thin ribbon ($t \ll r$) regardless of ℓ . Dropping these two terms, Eq. (14) becomes

$$\frac{\partial\sigma_{uu}}{\partial u} + \frac{\partial\sigma_{uv}}{\partial v} + \frac{\partial\sigma_{ur}}{\partial\zeta} \approx 0, \quad (15)$$

and, by the $u \leftrightarrow v$ symmetry noted above,

$$\frac{\partial\sigma_{uv}}{\partial u} + \frac{\partial\sigma_{vv}}{\partial v} + \frac{\partial\sigma_{vr}}{\partial\zeta} \approx 0. \quad (16)$$

Integrating each of these through the thickness ($\int_{-t/2}^{t/2} d\zeta$) and using the Fundamental Theorem of Calculus on the ζ -derivative term gives

$$\frac{\partial N_{uu}}{\partial u} + \frac{\partial N_{uv}}{\partial v} + f_u(u, v) = 0, \quad f_u := \sigma_{ur}(\zeta=t/2) - \sigma_{ur}(\zeta=-t/2),$$

(17)

where $N_{uu} := \int \sigma_{uu} d\zeta$, etc., are the thickness-integrated stress resultants, and the identical steps for the $\hat{v}$ -component define f_v analogously. The quantity f_u is exactly the *difference of the two contact tractions* on the ribbon's top and bottom surfaces — physically, the net friction transmitted by the neighboring wound layers — and Eq. (17) holds regardless of what that difference turns out to be. Section 3 is entirely devoted to determining f_u, f_v ; nothing above depends on the outcome. We box Eq. (17) because, together with its out-of-plane counterpart (Section 2.3) and the friction law itself, it survives essentially unchanged into the final closed system of Section 5.

In the further idealized limit of an infinitesimally thin membrane — where the stresses do not vary through the thickness at all ($N_{uu} \rightarrow \sigma_{uu}t$, etc.), and the boundary-traction difference f_u is simply treated as a prescribed force per unit volume rather than derived from a resolved thickness — Eq. (17) (divided through by t) reduces to the elementary two-component balance

$$\frac{\partial\sigma_{uv}}{\partial v} + \frac{\partial\sigma_{uu}}{\partial u} + f_u = 0, \quad (18)$$

$$\frac{\partial\sigma_{uv}}{\partial u} + \frac{\partial\sigma_{vv}}{\partial v} + f_v = 0. \quad (19)$$

We leave this simpler pair unboxed — it is not itself part of the final system, only a limit of it — but keep it on hand for comparison in Section 4.

2.3 Out-of-plane force balance

The same volume-element balance used above has an $\hat{r}$ -component too. Physically, the frame $(\hat{u}, \hat{v})$ tilts slightly as one moves from one side of a volume element to the opposite side — exactly as, for instance, uniform tension in a curved rope produces a net inward force — so even a spatially uniform in-plane stress produces a net radial force, purely because the element itself is not flat. This curvature-induced force is what the ribbon's own curvature-induced pressure ultimately balances against the contact pressure transmitted by the neighboring wound layers, through σ_{rr} .

Repeating the same traction-vector bookkeeping as Section 2.2, but now collecting the $\hat{r}$ -component of $\partial \vec{t}_u / \partial u + \partial \vec{t}_v / \partial v + \partial \vec{t}_\zeta / \partial \zeta = 0$ (again using Eq. 11 for how $\hat{u}, \hat{v}, \hat{r}$ rotate into one another) gives, by the identical procedure,

$$\frac{\partial \sigma_{ur}}{\partial u} + \frac{\partial \sigma_{vr}}{\partial v} + \frac{\partial \sigma_{rr}}{\partial \zeta} - \kappa_{uu} \sigma_{uu} + 2\kappa_{uv} \sigma_{uv} - \kappa_{vv} \sigma_{vv} = 0. \quad (20)$$

Here $-\kappa_{uu} \sigma_{uu} + 2\kappa_{uv} \sigma_{uv} - \kappa_{vv} \sigma_{vv}$ plays the role the curvature-weighted terms played in Eq. (14) — except here we do *not* get to drop the leading terms $\partial \sigma_{ur} / \partial u, \partial \sigma_{vr} / \partial v$: these are exactly the terms responsible for carrying load sideways in v (the mechanism absent from a pure membrane treatment), and whether they are negligible depends on the length scale ℓ over which σ_{ur}, σ_{vr} vary — small far from any edge, but not necessarily small near the overhang boundary, which is the entire reason for introducing them in the first place.

The pure-membrane limit. Dropping σ_{ur}, σ_{vr} entirely — the same idealized limit used for Eq. (18) — reduces Eq. (20) to $\partial \sigma_{rr} / \partial \zeta = \kappa_{uu} \sigma_{uu} + \kappa_{vv} \sigma_{vv} - 2\kappa_{uv} \sigma_{uv}$. The right-hand side, multiplied by r to work with a quantity of ordinary Cauchy stress dimensions (N/m²) rather than stress-per-length, is exactly the effective clamping pressure that a pure membrane treatment would balance against the contact pressure of the neighboring wound layers (Section 3); we call it P :

$$P := \sigma_{uu} \cos^2 \phi + \sigma_{vv} \sin^2 \phi - \sigma_{uv} \sin(2\phi) \quad (21)$$

(using $\kappa_{uu} = \cos^2 \phi / r$, $\kappa_{vv} = \sin^2 \phi / r$, $\kappa_{uv} = \sin \phi \cos \phi / r$, Eq. 9). In this limit P is nothing but σ_{rr} itself, up to sign: $\sigma_{rr} = -P$, so that compression ($\sigma_{rr} < 0$) corresponds to a positive clamping pressure ($P > 0$). We introduce the separate symbol P , rather than writing σ_{rr} everywhere, purely for convenience: it keeps the sign non-negative throughout (useful later, e.g. the monotonicity argument of Eq. 60), and its two boundary values, $P_{in} := -\sigma_{rr}(u, v, -t/2)$ and $P_{out} := -\sigma_{rr}(u, v, +t/2)$ (Eq. 22), read more naturally as “the pressure felt from the inner/outer neighbor” than the equivalent statements written directly in σ_{rr} . We box Eq. (21) because P is the quantity that does the work throughout Section 3 and Section 5.

Can σ_{rr} be treated as uniform through the thickness? Equation (20) shows σ_{rr} is *not* exactly constant in ζ in general: its ζ -derivative equals P/r minus the shear-divergence term. However, since $P/r \sim \sigma_{uu}/r$ and this is integrated over only the thin range $\zeta \in [-t/2, t/2]$, the resulting *change* in σ_{rr} across the thickness is of order $(\sigma_{uu}/r) \cdot t = \sigma_{uu} \cdot (t/r)$ — small compared to σ_{uu} itself for a thin ribbon. Treating σ_{rr} (and by the same argument σ_{ur}, σ_{vr}) as approximately uniform through the thickness is therefore a controlled, leading-order approximation, *provided* we track the resulting $O(t/r)$ correction explicitly rather than discard it silently: it is exactly what distinguishes the pressure available from an inner neighbor from that available from an outer one, which is the entire content of the friction law. We return to this in Section 3.3.

Under this approximation, the physical contact conditions become direct boundary conditions on σ_{rr} at the ribbon’s two surfaces: at $\zeta = +t/2$ (facing the outer neighbor, if present) and $\zeta = -t/2$ (facing the inner neighbor, if present), continuity of traction across a contact interface (Newton’s

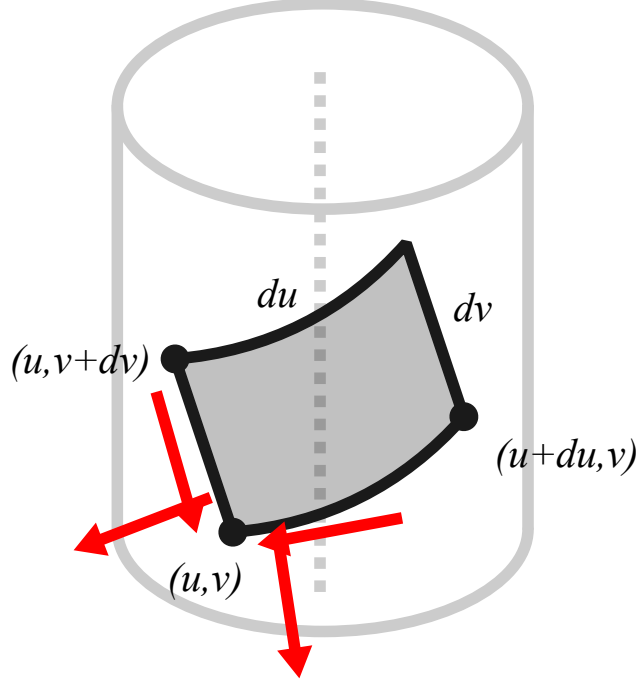


Figure 2: in progress

Third Law applied to the two touching surfaces) requires σ_{rr} there to equal the actual contact pressure, with sign such that compression corresponds to $\sigma_{rr} < 0$ (the standard tension-positive stress convention):

$$\sigma_{rr}(u, v, +t/2) = -P_{out}(u, v), \quad \sigma_{rr}(u, v, -t/2) = -P_{in}(u, v), \quad (22)$$

with $P_{in}, P_{out} \geq 0$ (a surface can only push, not pull). Where no neighbor is present on a given side, the corresponding pressure is simply zero.

3 Friction

Sections 2.2–2.3 left the boundary tractions at $\zeta = \pm t/2$ — equivalently, the quantities f_u, f_v of Eq. (17) and P_{in}, P_{out} of Eq. (22) — entirely unspecified. We now determine them: first the slip direction based on the layer kinematics, and then their magnitude based on Coulomb friction applied to the contact pressure of Section 2.3.

3.1 Overlapping neighbors

Because the ribbon is wound around itself, a given area element at (u, v) could physically overlap with another area element one full turn away along the ribbon. Specifically, an area element at point (u, v) overlaps with the neighboring interior layer at point (u^-, v^-) if their cylindrical coordinates have equal r and z , but differ by one full turn in θ . In terms of the physical (arc-length) displacement

between the two points, this is

$$\vec{p}(u, v, x) - \vec{p}(u^-, v^-, x) = \begin{bmatrix} 0 \\ 2\pi \\ 0 \end{bmatrix}, \quad \text{i.e., a } \theta\text{-difference of exactly one full turn.} \quad (23)$$

Plugging in Eq. (4) — $\theta(u, v) = (u \cos \phi - v \sin \phi)/r$, $z(u, v) = u \sin \phi + v \cos \phi$ — turns this into the linear system $(\Delta u \cos \phi - \Delta v \sin \phi)/r = 2\pi$, $\Delta u \sin \phi + \Delta v \cos \phi = 0$ for $\Delta u := u^- - u$, $\Delta v := v^- - v$, with solution

$$u^- = u - 2\pi r \cos \phi, \quad (24)$$

$$v^- = v + 2\pi r \sin \phi. \quad (25)$$

By the identical argument with $\theta(u^+, v^+) = \theta(u, v) + 2\pi$ (i.e., the neighboring *outer* layer, one full turn further out), the element has an outer overlapping neighbor at

$$u^+ = u + 2\pi r \cos \phi, \quad (26)$$

$$v^+ = v - 2\pi r \sin \phi. \quad (27)$$

3.2 Relative slip direction

The position vector $\vec{p}(u, v, x)$ of a material point (u, v) is given by Eq. (4). Substituting Eq. (2) and Eq. (3) to expose the dependence on x gives

$$\vec{p}(u, v, x) = \begin{bmatrix} \frac{\sqrt{L^2 - x^2}}{\theta_L} \\ \frac{u\theta_L}{L} - \frac{v x \theta_L}{L\sqrt{L^2 - x^2}} \\ \frac{ux}{L} + \frac{v\sqrt{L^2 - x^2}}{L} \end{bmatrix}. \quad (28)$$

The velocity of a given material point (u, v) as the active end of the ribbon is displaced (i.e., as x changes) is then obtained by taking the partial derivative of each component with respect to x :

$$\frac{\partial}{\partial x} \vec{p}(u, v, x) = \begin{bmatrix} \frac{\partial r}{\partial x} \\ \frac{\partial \theta}{\partial x} \\ \frac{\partial z}{\partial x} \end{bmatrix} = \begin{bmatrix} -\frac{x}{\theta_L \sqrt{L^2 - x^2}} \\ -\frac{L \theta_L v}{(L^2 - x^2)^{3/2}} \\ \frac{u}{L} - \frac{vx}{L\sqrt{L^2 - x^2}} \end{bmatrix}. \quad (29)$$

We can then plug u^-, v^- into Eq. (29) to compute the velocity of the element relative to its inner overlapping neighbor, which gives the relative slip direction in the r, θ, z frame:

$$\frac{\partial \vec{p}(u, v, x)}{\partial x} - \frac{\partial \vec{p}(u^-, v^-, x)}{\partial x} = \begin{bmatrix} 0 \\ \frac{2\pi x}{L^2 - x^2} \\ \frac{2\pi}{\theta_L} \end{bmatrix}. \quad (30)$$

As expected, there is no relative velocity in the radial direction (i.e., the layers are not lifting away from each other). We can now compute the relative slip direction in the local frame by projecting

this slip velocity from the θ, z basis onto the u, v basis using the relation described by Eq. (1). Since $\partial\theta/\partial x$ above is an *angular* rate, we first convert it to a linear (arc-length) rate by multiplying by r , giving $v_\theta = r \partial\theta/\partial x$; then projecting as just described:

$$\vec{v}_{slip}(u, v, x) = \begin{bmatrix} \cos \phi & \sin \phi \\ -\sin \phi & \cos \phi \end{bmatrix} \begin{bmatrix} r \cdot \frac{2\pi x}{L^2 - x^2} \\ \frac{2\pi}{\theta_L} \end{bmatrix}. \quad (31)$$

We simplify this expression by substituting x and r in terms of ϕ (Eq. (2), (3)) to expose the double-angle combination, then applying double-angle trig identities to factor out common terms. The result is a scaled unit vector:

$$\vec{v}_{slip}(u, v, x) = \frac{2\pi}{\theta_L \cos \phi} \begin{bmatrix} \sin(2\phi) \\ \cos(2\phi) \end{bmatrix}. \quad (32)$$

The prefactor is strictly positive for all $x \in (0, L)$. Therefore, the relative slip velocity points in the direction of the unit vector $(\sin 2\phi, \cos 2\phi)$ in the local u, v frame, so the Coulomb friction force opposing this motion must point in the opposite direction:

$$\hat{f} = - \begin{bmatrix} \sin(2\phi) \\ \cos(2\phi) \end{bmatrix}. \quad (33)$$

Recall that this is the friction exerted on the element by the inner layer, which resists the element from sliding forward with x . By the same argument, the friction exerted by the outer layer is the exact opposite, dragging the element forward.

3.3 Magnitude and domain of the friction force

We now determine the magnitude and the area over which the friction force acts, by attributing it directly to boundary tractions in σ_{ur}, σ_{vr} at each of the ribbon's two surfaces — exactly the unknown quantities left open in Eq. (17).

At $\zeta = +t/2$, the traction exerted on the ribbon by its outer neighbor has u -component $\sigma_{ur}(u, v, t/2)$ (by definition of the Cauchy traction on the outward-normal face). Since the outer neighbor slips forward relative to this element and drags it forward (Section 3.2), this traction is $+\mu P_{out}$ (Coulomb's law) times the forward slip-direction component, i.e.

$$\sigma_{ur}(u, v, +t/2) = \mu P_{out}(u, v) \sin(2\phi), \quad \sigma_{vr}(u, v, +t/2) = \mu P_{out}(u, v) \cos(2\phi), \quad (34)$$

where an outer neighbor is present, and zero otherwise. At $\zeta = -t/2$, the traction on the ribbon from the inner neighbor points in the opposite direction to oppose slip:

$$\sigma_{ur}(u, v, -t/2) = \mu P_{in}(u, v) \sin(2\phi), \quad \sigma_{vr}(u, v, -t/2) = \mu P_{in}(u, v) \cos(2\phi), \quad (35)$$

again valid only where an inner neighbor is present. Note that the sign of the expression does not flip due to the sign convention for shear stresses. Using Eq. (22), both reduce to the same functional

form, $\sigma_{ur} = -\mu\sigma_{rr}\sin(2\phi)$, $\sigma_{vr} = -\mu\sigma_{rr}\cos(2\phi)$, evaluated at whichever surface is in contact, as a direct relation between the shear and normal tractions at each surface.

3.4 Overlap conditions

We neglect edge effects where u^-, u^+ could be outside the $[0, L]$ bounds. As a result, an inner neighbor is present exactly whenever v^- lies within $[-W/2, W/2]$, i.e. (using Eq. 25) whenever $v \leq v_c^{in}(\phi) := \frac{W}{2} - \Delta v$, and an outer neighbor is present exactly whenever v^+ lies within $[-W/2, W/2]$, i.e. whenever $v \geq v_c^{out}(\phi) := -\frac{W}{2} + \Delta v$, with $\Delta v := 2\pi r \sin \phi$.

Both thresholds are stated purely in terms of ϕ , and together they partition the width into (up to) three bands: inner only, outer only, and either both or neither. Every combination is accommodated automatically by evaluating the two conditions independently.

Once the width-integrated equilibrium equation of Section 2.2 (Eq. 17) is used to connect $N_{uu} = \int \sigma_{uu} d\zeta$ back to the boundary-traction difference $\sigma_{ur}(t/2) - \sigma_{ur}(-t/2)$, the total, effective friction force entering that equation is the *sum* of the two independent, piecewise contributions above:

$$\boxed{\begin{aligned} f_u(u, v) &= \underbrace{\begin{cases} \mu P_{out}(u, v) \sin(2\phi) & v \geq v_c^{out}(\phi) \\ 0 & \text{otherwise} \end{cases}}_{\text{outer neighbor, forward drag}} - \underbrace{\begin{cases} \mu P_{in}(u, v) \sin(2\phi) & v \leq v_c^{in}(\phi) \\ 0 & \text{otherwise} \end{cases}}_{\text{inner neighbor, backward drag}}, \\ f_v(u, v) &= \underbrace{\begin{cases} \mu P_{out}(u, v) \cos(2\phi) & v \geq v_c^{out}(\phi) \\ 0 & \text{otherwise} \end{cases}}_{\text{outer neighbor, forward drag}} - \underbrace{\begin{cases} \mu P_{in}(u, v) \cos(2\phi) & v \leq v_c^{in}(\phi) \\ 0 & \text{otherwise} \end{cases}}_{\text{inner neighbor, backward drag}}. \end{aligned}} \quad (36)$$

We assume $P_{in}, P_{out} \geq 0$, deferring a rigorous justification to Section 5 (Eq. 60). We box Eq. (36) together with Eq. (17) and Eq. (21), since these are exactly the relations that let $\sigma_{ur}, \sigma_{vr}, \sigma_{rr}$ be eliminated in favor of $\sigma_{uu}, \sigma_{uv}, \sigma_{vv}$ once compatibility closes the system (Section 4.1 makes this elimination explicit).

4 Compatibility

4.1 Where this leaves the count

We now have three verified equilibrium equations—Eq. (14), (16) (or their reduced forms, Eq. 15), and (20)—for six unknown stress components. This is short exactly three equations, and it is worth being precise about how that gap actually closes, since it is *not* that three brand-new independent equations appear from nowhere to match the missing three. Rather, three of the six unknowns are eliminated entirely before compatibility is ever needed:

- The uniform-through-thickness approximation of Section 2.3 reduces $\sigma_{ur}, \sigma_{vr}, \sigma_{rr}$, to leading order in t/r , from full (u, v, ζ) -dependent fields to a single pair of boundary values each, at $\zeta = \pm t/2$.

- Those boundary values are then pinned down explicitly, not left free: Coulomb friction and Newton's Third Law fix σ_{ur}, σ_{vr} via Eqs. (34)–(35), and fix σ_{rr} via Eq. (22) together with the definition of P (Eq. 21) — both entirely in terms of $\sigma_{uu}, \sigma_{uv}, \sigma_{vv}$.

So $\sigma_{ur}, \sigma_{vr}, \sigma_{rr}$ never appear as independent unknowns in the final system at all: they are substituted away, leaving exactly $\sigma_{uu}, \sigma_{uv}, \sigma_{vv}$ (or, after thickness-averaging, $\hat{\sigma}_{uu}, \hat{\sigma}_{uv}, \hat{\sigma}_{vv}$) as the genuine remaining unknowns. Those are governed by two equilibrium equations (Eq. 17, or its membrane limit Eq. 18) — now correctly sourced by the boundary-traction friction of Eq. (36) rather than assumed as an external body force — which is exactly the classic, two-equations-for-three-unknowns gap of plane-stress equilibrium. The one remaining equation must come from a constitutive law (Hooke's law) plus the kinematic compatibility of the mid-surface strain field, derived next.

4.2 Thickness-averaged in-plane stresses

Define the thickness average $\hat{\sigma}_{uu}(u, v) := \frac{1}{t} \int_{-t/2}^{t/2} \sigma_{uu} d\zeta = N_{uu}(u, v)/t$, and likewise $\hat{\sigma}_{uv}, \hat{\sigma}_{vv}$, using the resultants $N_{uu} = \int \sigma_{uu} d\zeta$ introduced in Section 2.2. Dividing Eq. (17) through by t , and repeating the identical steps for the $\hat{v}$ -component of Eq. (15), gives

$$\boxed{\frac{\partial \hat{\sigma}_{uu}}{\partial u} + \frac{\partial \hat{\sigma}_{uv}}{\partial v} + \frac{f_u(u, v)}{t} = 0, \quad \frac{\partial \hat{\sigma}_{uv}}{\partial u} + \frac{\partial \hat{\sigma}_{vv}}{\partial v} + \frac{f_v(u, v)}{t} = 0,} \quad (37)$$

with f_u, f_v exactly the boundary-traction friction of Eq. (36), since $f_u \equiv \sigma_{ur}(t/2) - \sigma_{ur}(-t/2)$ by construction. Equation (37) has precisely the form of the original membrane balance, Eq. (18), with $\sigma_{ij} \rightarrow \hat{\sigma}_{ij}$ and the volumetric friction body force replaced by $f_u/t, f_v/t$: the geometry of the balance is unchanged, and only the physical origin of the driving term has been sharpened. As before, this is two equations for the three unknowns $\hat{\sigma}_{uu}, \hat{\sigma}_{uv}, \hat{\sigma}_{vv}$; we close the gap using compatibility.

4.3 Saint-Venant compatibility and the Beltrami–Michell equation

For a continuous sheet undergoing small deformation without tearing or overlap, the mid-surface strain components $\hat{\epsilon}_{uu}, \hat{\epsilon}_{vv}, \hat{\epsilon}_{uv}$ must be derivable from a single, continuous in-plane displacement field, which requires the Saint-Venant compatibility condition

$$\frac{\partial^2 \hat{\epsilon}_{uu}}{\partial v^2} + \frac{\partial^2 \hat{\epsilon}_{vv}}{\partial u^2} - 2 \frac{\partial^2 \hat{\epsilon}_{uv}}{\partial u \partial v} = 0. \quad (38)$$

Under linear isotropic plane-stress elasticity, Hooke's law relates these strains to the thickness-averaged stresses via Young's modulus E and Poisson ratio ν :

$$\hat{\epsilon}_{uu} = \frac{1}{E}(\hat{\sigma}_{uu} - \nu \hat{\sigma}_{vv}), \quad \hat{\epsilon}_{vv} = \frac{1}{E}(\hat{\sigma}_{vv} - \nu \hat{\sigma}_{uu}), \quad \hat{\epsilon}_{uv} = \frac{1 + \nu}{E} \hat{\sigma}_{uv}. \quad (39)$$

Substituting Eq. (39) into Eq. (38) and multiplying through by E , the elastic modulus cancels out entirely:

$$\frac{\partial^2 \hat{\sigma}_{uu}}{\partial v^2} - \nu \frac{\partial^2 \hat{\sigma}_{vv}}{\partial v^2} + \frac{\partial^2 \hat{\sigma}_{vv}}{\partial u^2} - \nu \frac{\partial^2 \hat{\sigma}_{uu}}{\partial u^2} - 2(1 + \nu) \frac{\partial^2 \hat{\sigma}_{uv}}{\partial u \partial v} = 0. \quad (40)$$

To eliminate the mixed shear derivative, we differentiate the first equation of Eq. (37) with respect to u and the second with respect to v , then add:

$$2\frac{\partial^2\hat{\sigma}_{uv}}{\partial u\partial v} = -\left(\frac{\partial^2\hat{\sigma}_{uu}}{\partial u^2} + \frac{\partial^2\hat{\sigma}_{vv}}{\partial v^2}\right) - \frac{1}{t}\left(\frac{\partial f_u}{\partial u} + \frac{\partial f_v}{\partial v}\right). \quad (41)$$

Substituting Eq. (41) into Eq. (40), the coefficients of $\partial^2\hat{\sigma}_{uu}/\partial u^2$ collect to $-\nu + (1 + \nu) = 1$ (matching the coefficient 1 already present on $\partial^2\hat{\sigma}_{uu}/\partial v^2$), and likewise the coefficients of $\partial^2\hat{\sigma}_{vv}/\partial v^2$ collect to 1; the $\hat{\sigma}_{uu}, \hat{\sigma}_{vv}$ terms therefore combine into the plain 2D Laplacian $\nabla^2 := \partial^2/\partial u^2 + \partial^2/\partial v^2$ acting on their sum, giving the Beltrami–Michell equation for plane stress in the presence of a boundary-traction body force:

$$\boxed{\nabla^2(\hat{\sigma}_{uu} + \hat{\sigma}_{vv}) + \frac{1 + \nu}{t}\left(\frac{\partial f_u}{\partial u} + \frac{\partial f_v}{\partial v}\right) = 0,} \quad (42)$$

with f_u, f_v given by Eq. (36). This is the third equation needed to close Eq. (37): together they form three equations for the three unknowns $\hat{\sigma}_{uu}, \hat{\sigma}_{uv}, \hat{\sigma}_{vv}$, subject to the free-edge boundary conditions on the long, unloaded edges of the ribbon,

$$\boxed{\sigma_{uv}\left(u, v = \pm\frac{W}{2}\right) = 0, \quad \sigma_{vv}\left(u, v = \pm\frac{W}{2}\right) = 0,} \quad (43)$$

which hold at every ζ and therefore, in particular, for $\hat{\sigma}_{uv}, \hat{\sigma}_{vv}$. Unlike the earlier treatment of Section 2.1, Eqs. (37)–(43) constitute a genuinely closed, well-posed boundary value problem for $\hat{\sigma}_{uu}, \hat{\sigma}_{uv}, \hat{\sigma}_{vv}$ on $(u, v) \in [0, L] \times [-W/2, W/2]$, at any frozen extension x .

5 PDE formulation and closed-form solution

We now seek to solve the system of PDEs for the stress field. To recap (Section 4.1): of the six stress components introduced in Section 2.1, three — $\sigma_{ur}, \sigma_{vr}, \sigma_{rr}$ — were eliminated along the way rather than solved for, via the uniform-through-thickness approximation together with Coulomb friction and Newton’s Third Law (Eqs. 34–35, 22), leaving them expressed entirely in terms of the remaining three through the clamping pressure P (Eq. 21),

$$P = \sigma_{uu} \cos^2 \phi + \sigma_{vv} \sin^2 \phi - \sigma_{uv} \sin(2\phi).$$

What survives is a genuinely closed system for $\hat{\sigma}_{uu}, \hat{\sigma}_{uv}, \hat{\sigma}_{vv}$ alone: the two thickness-averaged in-plane equilibrium equations (Eq. 37),

$$\frac{\partial \hat{\sigma}_{uu}}{\partial u} + \frac{\partial \hat{\sigma}_{uv}}{\partial v} + \frac{f_u}{t} = 0, \quad \frac{\partial \hat{\sigma}_{uv}}{\partial u} + \frac{\partial \hat{\sigma}_{vv}}{\partial v} + \frac{f_v}{t} = 0,$$

closed by the Beltrami–Michell compatibility equation (Eq. 42),

$$\nabla^2(\hat{\sigma}_{uu} + \hat{\sigma}_{vv}) + \frac{1 + \nu}{t} \left(\frac{\partial f_u}{\partial u} + \frac{\partial f_v}{\partial v} \right) = 0,$$

subject to the free-edge boundary conditions (Eq. 43), $\sigma_{uv} = \sigma_{vv} = 0$ at $v = \pm W/2$. The friction body force f_u, f_v entering both is the two-piece law of Eq. (36), built from P above. These equations, together with Eqs. (34)–(35) and (22) (already folded into P and f_u, f_v , so not solved separately), are the only ones carried forward as genuinely independent relations from Sections 2–4; everything else derived along the way (Eqs. 14, 20, and the pure-membrane limit Eq. 18) was superseded by its own reduced or thickness-averaged form and is kept only for reference.

5.1 Smooth relaxation of the two overlap boundaries

The friction law of Eq. (36) is linear in the stress field (through P_{in}, P_{out}), with coefficients that switch off discontinuously at the two geometric overlap boundaries $v_c^{in}(x)$ and $v_c^{out}(x)$. As before, we relax each hard indicator into a smooth sigmoidal gate. Let $\sigma(z) = 1/(1 + e^{-z})$ denote the logistic sigmoid, and define

$$S_w^{in}(v; x) = \sigma\left(\frac{v_c^{in}(x) - v}{\ell_w}\right), \quad S_w^{out}(v; x) = \sigma\left(\frac{v - v_c^{out}(x)}{\ell_w}\right), \quad (44)$$

where $\ell_w \ll W$ is a regularization length scale; $S_w^{in} \rightarrow 1$ deep in the region with an inner neighbor and $\rightarrow 0$ past v_c^{in} , while $S_w^{out} \rightarrow 1$ deep in the region with an outer neighbor and $\rightarrow 0$ past v_c^{out} , recovering the hard indicators of Eq. (36) as $\ell_w \rightarrow 0$. Using the leading-order approximation $P_{in} \approx P_{out} \approx P(u, v)$ (Eq. 21, evaluated pointwise; exact in the “both present” band up to the $O(t/r)$ correction already noted, and the natural leading-order closure for each single-neighbor band), the smoothed friction body forces become

$$\begin{aligned} f_u^s(u, v, x) &= \frac{\mu}{r} \sin(2\phi) P(u, v) \left[S_w^{out}(v; x) - S_w^{in}(v; x) \right], \\ f_v^s(u, v, x) &= \frac{\mu}{r} \cos(2\phi) P(u, v) \left[S_w^{out}(v; x) - S_w^{in}(v; x) \right]. \end{aligned} \quad (45)$$

The outer-only term S_w^{out} is the genuinely new piece relative to the earlier, single-sided treatment, and it is exactly the term whose driving pressure P_{out} we flagged in Section 3.3 as set by a contact one full turn away rather than by the local stress state. Resolving it in full requires tracking a recursive chain of contact pressures across the whole stack of wound layers—genuinely new physics beyond a single, local closure, and a natural next step once the present, simpler system is confirmed correct. For a first, leading-order treatment, we extend to the outer-only band the same reasoning already used to argue (Section 3, in the original membrane treatment) that the ribbon’s bending stiffness carries load sideways across regions with no direct local support: an isolated outer-only contact, resting only on material that is itself only barely supported further out, transmits a contact pressure that is subdominant at leading order, exactly like the true overhang

region of the original single-sided model. We therefore set $S_w^{out} \rightarrow 0$ at leading order, leaving

$$f_u^s(u, v, x) \approx -S_w^{in}(v; x) \frac{\mu}{r} \sin(2\phi) P(u, v), \quad f_v^s(u, v, x) \approx -S_w^{in}(v; x) \frac{\mu}{r} \cos(2\phi) P(u, v), \quad (46)$$

which are smooth (infinitely differentiable) functions of v for any $\ell_w > 0$ and, since P is linear in $\hat{\sigma}_{uu}, \hat{\sigma}_{uv}, \hat{\sigma}_{vv}$, linear in the stress field at every point. We revisit the dropped S_w^{out} term, and what refining it would change, at the end of this section.

5.2 Width-averaged 1D reduction

We first use compatibility itself to justify, rather than assume, that the width-averaged $\bar{\sigma}_{vv}$ is negligible relative to $\bar{\sigma}_{uu}$. The free-edge condition of Eq. (43) pins $\hat{\sigma}_{vv} = 0$ at $v = \pm W/2$, so $\hat{\sigma}_{vv}$ can only be nonzero in the interior of the width by varying over the *short* length scale W ; consequently $\partial^2 \hat{\sigma}_{vv} / \partial v^2 \sim \hat{\sigma}_{vv} / W^2$ in Eq. (42), whereas $\hat{\sigma}_{uu}$ (uniform across the width, by the closure below, and varying only over the *long* scale L set by the friction-driven exponential buildup) contributes $\partial^2 \hat{\sigma}_{uu} / \partial u^2 \sim \hat{\sigma}_{uu} / L^2$, at most as large as the friction-source terms on the right of Eq. (42), themselves $O(\hat{\sigma}_{uu} / r)$. Balancing $\hat{\sigma}_{vv} / W^2$ against terms of order $\hat{\sigma}_{uu} / L^2$ or $\hat{\sigma}_{uu} / (rL)$ gives $\hat{\sigma}_{vv} \sim \hat{\sigma}_{uu} (W/L)^2$ or smaller, which vanishes in the narrow-ribbon limit $L \gg W$ already invoked throughout. (We do not width-average Eq. (42) directly, since its second-order derivatives do not reduce to a clean boundary-flux argument the way the first-order equilibrium equations below do; this is an order-of-magnitude estimate, in the same spirit as the t/r scaling arguments of Section 2.) We therefore take, exactly as before but now justified,

$$\bar{\sigma}_{vv}(u) \approx 0, \quad \bar{\sigma}_{uu}(u) := \frac{1}{W} \int_{-W/2}^{W/2} \hat{\sigma}_{uu} dv, \quad \text{and similarly for } \bar{\sigma}_{uv}, \quad (47)$$

and the corresponding uniform closure $\hat{\sigma}_{uu}(u, v) \approx \bar{\sigma}_{uu}(u)$, $\hat{\sigma}_{uv}(u, v) \approx \bar{\sigma}_{uv}(u)$.

Integrating the first equation of Eq. (37), with $f_u \rightarrow f_u^s$ of Eq. (46), across the width exactly as before: the $\partial \hat{\sigma}_{uu} / \partial u$ term gives $W d\bar{\sigma}_{uu} / du$; the $\partial \hat{\sigma}_{uv} / \partial v$ term integrates, via the free-edge condition, to $\sigma_{uv}(u, W/2) - \sigma_{uv}(u, -W/2) = 0$; and dividing by W gives

$$\frac{d\bar{\sigma}_{uu}}{du} + \frac{1}{W} \int_{-W/2}^{W/2} f_u^s(u, v, x) dv = 0, \quad (48)$$

with the identical steps applied to the second equation of Eq. (37) giving the corresponding equation for $\bar{\sigma}_{uv}$. Using Eq. (47), the clamping pressure of Eq. (21) becomes, under the uniform closure,

$$P(u, v) \approx \bar{P}(u) := \cos^2 \phi \bar{\sigma}_{uu}(u) - \sin(2\phi) \bar{\sigma}_{uv}(u), \quad (49)$$

independent of v , so it factors outside the remaining width integral in Eq. (46), leaving only the gate $S_w^{in}(v; x)$ of Eq. (44) to be integrated:

$$\int_{-W/2}^{W/2} f_u^s(u, v, x) dv \approx -\frac{\mu}{r} \sin(2\phi) \bar{P}(u) \left[\int_{-W/2}^{W/2} S_w^{in}(v; x) dv \right]. \quad (50)$$

Using the antiderivative $\int \sigma(z) dz = \text{softplus}(z) := \ln(1 + e^z)$ of the logistic sigmoid, and $v_c^{in}(x) = \frac{W}{2} - \Delta v$ with $\Delta v(x) := 2\pi r \sin \phi$, the width-averaged, dimensionless *overlap fraction* is

$$\eta_s(x) := \frac{1}{W} \int_{-W/2}^{W/2} S_w^{in}(v; x) dv = \frac{\ell_w}{W} \left[\text{softplus}\left(\frac{W-\Delta v}{\ell_w}\right) - \text{softplus}\left(\frac{-\Delta v}{\ell_w}\right) \right], \quad (51)$$

which, as $\ell_w \rightarrow 0$ (for $0 < \Delta v < W$), tends to $\eta(x) = 1 - \Delta v/W$, the geometrically supported fraction of the width. Substituting Eq. (51) into Eq. (50), dividing by W , and writing out $\bar{P}(u)$ from Eq. (49) explicitly, the width-averaged equilibrium equations become the linear ODE system

$$\frac{d\bar{\sigma}_{uu}}{du} = \eta_s(x) [A_u \bar{\sigma}_{uu} + B_u \bar{\sigma}_{uv}], \quad \frac{d\bar{\sigma}_{uv}}{du} = \eta_s(x) [A_v \bar{\sigma}_{uu} + B_v \bar{\sigma}_{uv}], \quad (52)$$

$$A_u = \frac{\mu}{r} \cos^2 \phi \sin(2\phi), \quad B_u = -\frac{\mu}{r} \sin^2(2\phi), \quad A_v = \frac{\mu}{r} \cos^2 \phi \cos(2\phi), \quad B_v = -\frac{\mu}{2r} \sin(4\phi). \quad (53)$$

This is exactly Eq. (4)–(5) of the earlier, single-sided closure, but now arrived at as the leading-order limit of the compatibility-closed system of Section 4, with $\bar{\sigma}_{vv} \approx 0$ justified rather than assumed.

5.3 Exact rank-one structure and reduction to a scalar equation

The 2×2 coefficient matrix in Eq. (52), $M(x) = \begin{pmatrix} A_u & B_u \\ A_v & B_v \end{pmatrix}$, is singular for every x : both rows are fixed multiples of $(\cos^2 \phi, -\sin 2\phi)$, since f_u^s and f_v^s are always the *same* scalar P times $\sin 2\phi$ and $\cos 2\phi$ respectively (Eq. 46). Equivalently, M is the rank-one outer product

$$M(x) = \frac{\mu}{r} \vec{u} \vec{w}^\top, \quad \vec{u} = \begin{pmatrix} \sin 2\phi \\ \cos 2\phi \end{pmatrix}, \quad \vec{w} = \begin{pmatrix} \cos^2 \phi \\ -\sin 2\phi \end{pmatrix}, \quad \bar{P}(u) = \vec{w} \cdot \begin{pmatrix} \bar{\sigma}_{uu}(u) \\ \bar{\sigma}_{uv}(u) \end{pmatrix}, \quad (54)$$

with eigenvalues $\{0, \kappa(x)\}$, where $\vec{u}$ is the eigenvector for

$$\kappa(x) := \frac{\mu}{r} (\vec{w} \cdot \vec{u}) = \frac{\mu}{r} (\cos^2 \phi \sin 2\phi - \sin 2\phi \cos 2\phi) = \frac{\mu}{r} \sin^2 \phi \sin(2\phi), \quad (55)$$

and the null eigenvector, satisfying $\vec{w} \cdot \vec{v}_0 = 0$ and therefore carrying zero contact pressure, is

$$\vec{v}_0 = \begin{pmatrix} 2 \sin \phi \\ \cos \phi \end{pmatrix}. \quad (56)$$

Writing the general solution as $\begin{pmatrix} \bar{\sigma}_{uu}(u) \\ \bar{\sigma}_{uv}(u) \end{pmatrix} = A(u) \vec{u} + B_0 \vec{v}_0$ and substituting into Eq. (52) using $M\vec{u} = \kappa\vec{u}$, $M\vec{v}_0 = 0$, and the linear independence of $\vec{u}, \vec{v}_0$ for $\phi \neq 0, 90^\circ$, gives B_0 as a genuine constant of the motion together with a single autonomous scalar equation for $A(u)$:

$$\frac{dA}{du} = \eta_s(x) \kappa(x) A(u), \quad P(u) = A(u) \sin(2\phi) \sin^2 \phi. \quad (57)$$

As before, we take the minimal, best-conditioned choice $B_0 = 0$, with the single constant $A_0 := A(0)$ carrying the free physical scale of the whole solution (the “holding tension” at the base, exactly as

in the classical capstan problem).

5.4 Closed-form solution

With $B_0 = 0$ and $\eta_s(x)\kappa(x)$ constant in u (both depend only on the frozen extension x), Eq. (57) integrates immediately:

$$\boxed{A(u) = A_0 \exp [\eta_s(x) \kappa(x) u]}, \quad (58)$$

$$\boxed{\bar{\sigma}_{uu}(u) = A_0 e^{\eta_s(x)\kappa(x)u} \sin 2\phi, \quad \bar{\sigma}_{uv}(u) = A_0 e^{\eta_s(x)\kappa(x)u} \cos 2\phi.} \quad (59)$$

Choosing $A_0 > 0$ gives, since $\eta_s, \kappa \geq 0$ everywhere,

$$A_0 > 0 \implies A(u) \geq A_0 > 0 \text{ for all } u \in [0, L], \quad (60)$$

so $P(u) = A(u) \sin 2\phi \sin^2 \phi \geq A_0 \sin 2\phi \sin^2 \phi > 0$ throughout the ribbon, confirming the non-negativity of P (and hence, via $P_{in} \approx P$, of P_{in}) assumed in Section 3.3.

5.5 Force-displacement relation

Projecting the stress resultant at the active end ($u = L$) onto the global pulling direction, exactly as before, gives $F(x) = W[\bar{\sigma}_{uu}(L) \sin \phi(x) + \bar{\sigma}_{uv}(L) \cos \phi(x)]$; substituting Eq. (59) and using $\sin 2\phi \sin \phi + \cos 2\phi \cos \phi = \cos(2\phi - \phi) = \cos \phi$ collapses the double-angle dependence, giving $F(x) = W A_0 \cos \phi(x) e^{\eta_s(x)\kappa(x)L}$. Writing $\kappa(x)$ out in terms of x (via $\sin \phi = x/L$, $\cos \phi = \sqrt{L^2 - x^2}/L$, $\mu/r = \mu\theta_L/\sqrt{L^2 - x^2}$) gives $\kappa(x) = 2\mu\theta_L x^3/L^4$, and the final closed-form force-displacement law,

$$\boxed{F(x) = \frac{W}{L} A_0 \sqrt{L^2 - x^2} \exp \left[\frac{2\mu\theta_L \eta_s(x) x^3}{L^3} \right]}, \quad (61)$$

with $r(x), \Delta v(x), \eta_s(x)$ exactly as in Eq. (3) and Eq. (51).

What the six-component treatment changed, and what it did not. At the leading order adopted here— $S_w^{out} \rightarrow 0$ in Section 5.1, and the resulting $\bar{\sigma}_{vv} \approx 0$ closure of Section 5.2—Eq. (61) is identical in form to the closed-form law obtained from the simpler, single-sided membrane treatment. What has changed is the status of that law: $\bar{\sigma}_{vv} \approx 0$ is now a controlled consequence of compatibility (Section 4) rather than an assumption, the friction driving it is now derived from genuine boundary tractions on a resolved thickness rather than posited as a volume force, and the model now explicitly exposes a further, previously invisible effect — the outer-only contact band’s forward drag, of the same order $\mu P/r$ as the resisting term it was set to zero against — as a concrete, quantified target for refinement, rather than an effect the simpler treatment had no way to even represent. Resolving P_{out} properly, via the recursive contact-pressure chain across the wound layers flagged in Section 3.3, would modify $\eta_s(x)$ (and hence the exponent of Eq. 61) directly; this is the natural next step.

6 Experimental validation

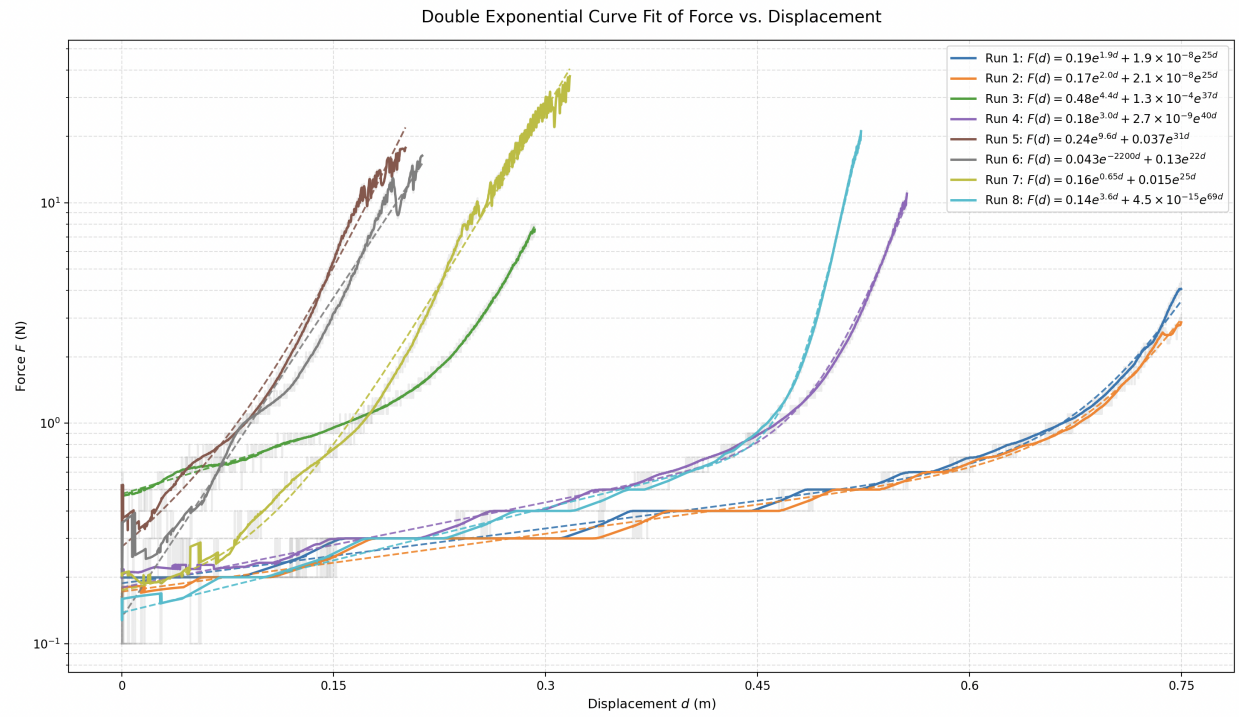


Figure 3: Instron force-displacement data, with raw quantized data (grey), smoothed data (solid colored), and curve fit (dashed colored).