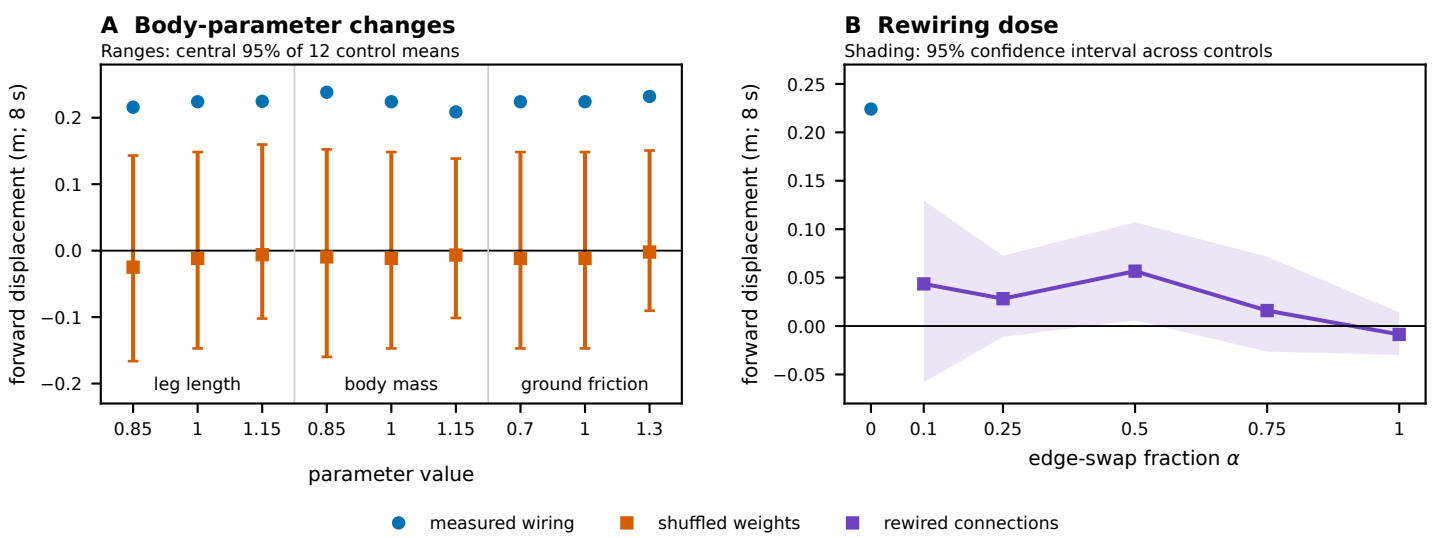
A Body-parameter changes
Ranges: central 95% of 12 control means
forward displacement (m; 8 s)
0.2
0.1
0.0
−0.1
−0.2
leg length
body mass
ground friction
0.85
1
1.15
0.85
1
1.15
0.7
1
1.3
parameter value
B Rewiring dose
Shading: 95% confidence interval across controls
forward displacement (m; 8 s)
0.25
0.20
0.15
0.10
0.05
0.00
−0.05
0
0.1
0.25
0.5
0.75
1
edge-swap fraction α
measured wiring
shuffled weights
rewired connections