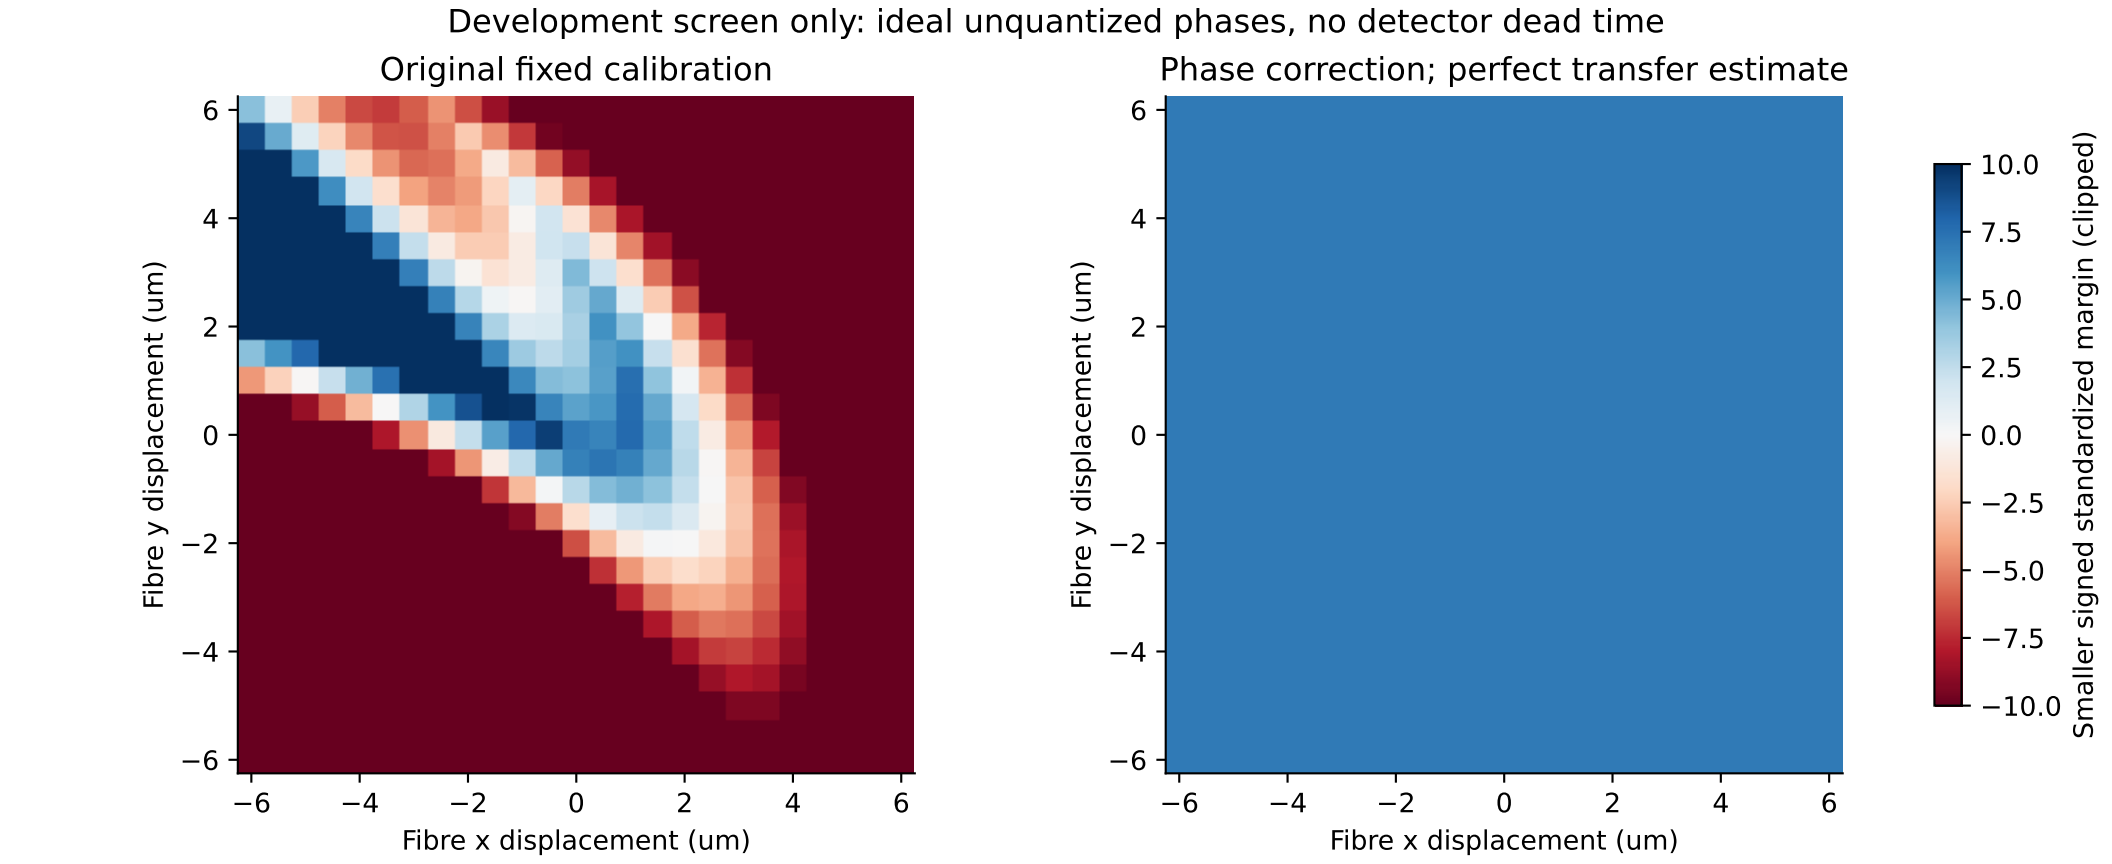
Development screen only: ideal unquantized phases, no detector dead time
Original fixed calibration
Phase correction; perfect transfer estimate
Fibre y displacement (um)
Fibre x displacement (um)
Smaller signed standardized margin (clipped)
6
4
2
0
−2
−4
−6
10.0
7.5
5.0
2.5
0.0
−2.5
−5.0
−7.5
−10.0