



A COMMUNITY OF CHOICE

Development Department

2101 O'Neil Avenue, Suite 202, Cheyenne WY 82001
(Phone) 307-637-6282 (Fax) 307-637-6366

October 3, 2016

City Council
City of Cheyenne, WY

RE: Waterford Square 2nd Filing Final Plat Recommendation

Owing to a clarification made by the City Engineer of the comments made during the review period, City staff hereby withdraws the recommendation of approval of this plat.

The original Waterford Square plat proposed 4-plex buildings with a shared public parking area in the middle with a 26' wide drive aisle. This plat proposes reducing the density by half and placing the parking on private lots. A 20' wide drive aisle (or accessway) remains. The plat proposes parcels which are located between the accessway and I-80. In order for these parcels to be effectively serviced by emergency response agencies, the accessway will be **required** to be named by Fire Code. If the development had remained as 4-plexes, the drive aisle of the parking lot would still have been required to be named. For apartment-style development, the City does allow named parking lot drive aisles (see the Carter Cottage plat development).

The applicant proposes that the accessway will be maintained by an HOA. If the accessway is built as proposed, the City is concerned that if the HOA fails, and if the City is required to take over maintenance of the accessway, and if the accessway has a name, those living off the accessway may expect street-level maintenance of what is effectively an alley.

Staff maintains that by naming an accessway, it will be considered a private street. Private streets are **not** allowed per section 4.3.2.c of the Unified Development Code, except *"in some extraordinary cases where there is no public right-of-way, and no feasible means of access to public right-of-way, it may be necessary for property owners to provide access by means of easements or other agreements and to construct a private access road."* As private streets are not allowed, this accessway will be required to be built to a City street standard. The narrowest City street is 50' wide. The current accessway is proposed at 20' wide (the 20' wide access is proposed on the revised map).

The product the developer wishes to place on these lots will not be able to be placed once the necessary 30' is added. As staff requires a street section to replace the proposed accessway, and the proposed development does not have enough room for the street and the proposed product to be built, staff recommends denial of this plat.

Regards,

Seth Lloyd, Planner

Encl: 2015 International Fire Code section regarding addressing (5.505)
Unified Development Code section regarding private streets (4.3.2.c)
Cc: City Clerk, City Attorney, Mayor's office

503.2.3 Surface. Fire apparatus access roads shall be designed and maintained to support the imposed loads of fire apparatus and shall be surfaced so as to provide all-weather driving capabilities.

503.2.4 Turning radius. The required turning radius of a fire apparatus access road shall be determined by the *fire code official*.

503.2.5 Dead ends. Dead-end fire apparatus access roads in excess of 150 feet (45 720 mm) in length shall be provided with an *approved* area for turning around fire apparatus.

503.2.6 Bridges and elevated surfaces. Where a bridge or an elevated surface is part of a fire apparatus access road, the bridge shall be constructed and maintained in accordance with AASHTO HB-17. Bridges and elevated surfaces shall be designed for a live load sufficient to carry the imposed loads of fire apparatus. Vehicle load limits shall be posted at both entrances to bridges where required by the *fire code official*. Where elevated surfaces designed for emergency vehicle use are adjacent to surfaces that are not designed for such use, *approved* barriers, *approved* signs or both shall be installed and maintained where required by the *fire code official*.

503.2.7 Grade. The grade of the fire apparatus access road shall be within the limits established by the *fire code official* based on the fire department's apparatus.

503.2.8 Angles of approach and departure. The angles of approach and departure for fire apparatus access roads shall be within the limits established by the *fire code official* based on the fire department's apparatus.

503.3 Marking. Where required by the *fire code official*, *approved* signs or other *approved* notices or markings that include the words NO PARKING—FIRE LANE shall be provided for fire apparatus access roads to identify such roads or prohibit the obstruction thereof. The means by which *fire lanes* are designated shall be maintained in a clean and legible condition at all times and be replaced or repaired when necessary to provide adequate visibility.

503.4 Obstruction of fire apparatus access roads. Fire apparatus access roads shall not be obstructed in any manner, including the parking of vehicles. The minimum widths and clearances established in Sections 503.2.1 and 503.2.2 shall be maintained at all times.

503.4.1. Traffic calming devices. Traffic calming devices shall be prohibited unless *approved* by the *fire code official*.

503.5 Required gates or barricades. The *fire code official* is authorized to require the installation and maintenance of gates or other *approved* barricades across fire apparatus access roads, trails or other accessways, not including public streets, alleys or highways. Electric gate operators, where provided, shall be *listed* in accordance with UL 325. Gates intended for automatic operation shall be designed, constructed and installed to comply with the requirements of ASTM F 2200.

503.5.1 Secured gates and barricades. Where required, gates and barricades shall be secured in an *approved* man-

ner. Roads, trails and other accessways that have been closed and obstructed in the manner prescribed by Section 503.5 shall not be trespassed on or used unless authorized by the *owner* and the *fire code official*.

Exception: The restriction on use shall not apply to public officers acting within the scope of duty.

503.6 Security gates. The installation of security gates across a fire apparatus access road shall be *approved* by the fire chief. Where security gates are installed, they shall have an *approved* means of emergency operation. The security gates and the emergency operation shall be maintained operational at all times. Electric gate operators, where provided, shall be *listed* in accordance with UL 325. Gates intended for automatic operation shall be designed, constructed and installed to comply with the requirements of ASTM F 2200.

SECTION 504

ACCESS TO BUILDING OPENINGS AND ROOFS

504.1 Required access. Exterior doors and openings required by this code or the *International Building Code* shall be maintained readily accessible for emergency access by the fire department. An *approved* access walkway leading from fire apparatus access roads to exterior openings shall be provided when required by the *fire code official*.

504.2 Maintenance of exterior doors and openings. Exterior doors and their function shall not be eliminated without prior approval. Exterior doors that have been rendered non-functional and that retain a functional door exterior appearance shall have a sign affixed to the exterior side of the door with the words THIS DOOR BLOCKED. The sign shall consist of letters having a principal stroke of not less than $\frac{3}{4}$ inch (19.1 mm) wide and not less than 6 inches (152 mm) high on a contrasting background. Required fire department access doors shall not be obstructed or eliminated. Exit and *exit access* doors shall comply with Chapter 10. Access doors for *high-piled combustible storage* shall comply with Section 3206.6.1.

504.3 Stairway access to roof. New buildings four or more stories above grade plane, except those with a roof slope greater than four units vertical in 12 units horizontal (33.3-percent slope), shall be provided with a *stairway* to the roof. *Stairway* access to the roof shall be in accordance with Section 1011.12. Such *stairway* shall be marked at street and floor levels with a sign indicating that the *stairway* continues to the roof. Where roofs are used for roof gardens or for other purposes, *stairways* shall be provided as required for such occupancy classification.

SECTION 505

PREMISES IDENTIFICATION

505.1 Address identification. New and existing buildings shall be provided with *approved* address identification. The address identification shall be legible and placed in a position that is visible from the street or road fronting the property. Address identification characters shall contrast with their background. Address numbers shall be Arabic numbers or alphabetical letters. Numbers shall not be spelled out. Each

character shall be not less than 4 inches (102 mm) high with a minimum stroke width of $\frac{1}{2}$ inch (12.7 mm). Where required by the *fire code official*, address identification shall be provided in additional *approved* locations to facilitate emergency response. Where access is by means of a private road and the building cannot be viewed from the *public way*, a monument, pole or other sign or means shall be used to identify the structure. Address identification shall be maintained.

505.2 Street or road signs. Streets and roads shall be identified with *approved* signs. Temporary signs shall be installed at each street intersection when construction of new roadways allows passage by vehicles. Signs shall be of an *approved* size, weather resistant and be maintained until replaced by permanent signs.

SECTION 506 KEY BOXES

506.1 Where required. Where access to or within a structure or an area is restricted because of secured openings or where immediate access is necessary for life-saving or fire-fighting purposes, the *fire code official* is authorized to require a key box to be installed in an *approved* location. The key box shall be of an *approved* type listed in accordance with UL 1037, and shall contain keys to gain necessary access as required by the *fire code official*.

506.1.1 Locks. An *approved* lock shall be installed on gates or similar barriers where required by the *fire code official*.

506.1.2 Key boxes for nonstandardized fire service elevator keys. Key boxes provided for nonstandardized fire service elevator keys shall comply with Section 506.1 and all of the following:

1. The key box shall be compatible with an existing rapid entry key box system in use in the jurisdiction and *approved* by the *fire code official*.
2. The front cover shall be permanently labeled with the words "Fire Department Use Only—Elevator Keys."
3. The key box shall be mounted at each elevator bank at the lobby nearest to the lowest level of fire department access.
4. The key box shall be mounted 5 feet 6 inches (1676 mm) above the finished floor to the right side of the elevator bank.
5. Contents of the key box are limited to fire service elevator keys. Additional elevator access tools, keys and information pertinent to emergency planning or elevator access shall be permitted where authorized by the *fire code official*.
6. In buildings with two or more elevator banks, a single key box shall be permitted to be used where such elevator banks are separated by not more than 30 feet (9144 mm). Additional key boxes shall be pro-

vided for each individual elevator or elevator bank separated by more than 30 feet (9144 mm).

Exception: A single key box shall be permitted to be located adjacent to a *fire command center* or the non-standard fire service elevator key shall be permitted to be secured in a key box used for other purposes and located in accordance with Section 506.1.

506.2 Key box maintenance. The operator of the building shall immediately notify the *fire code official* and provide the new key where a lock is changed or rekeyed. The key to such lock shall be secured in the key box.

SECTION 507 FIRE PROTECTION WATER SUPPLIES

507.1 Required water supply. An *approved* water supply capable of supplying the required fire flow for fire protection shall be provided to premises upon which facilities, buildings or portions of buildings are hereafter constructed or moved into or within the jurisdiction.

507.2 Type of water supply. A water supply shall consist of reservoirs, pressure tanks, elevated tanks, water mains or other fixed systems capable of providing the required fire flow.

507.2.1 Private fire service mains. Private fire service mains and appurtenances shall be installed in accordance with NFPA 24.

507.2.2 Water tanks. Water tanks for private fire protection shall be installed in accordance with NFPA 22.

507.3 Fire flow. Fire flow requirements for buildings or portions of buildings and facilities shall be determined by an *approved* method.

507.4 Water supply test. The *fire code official* shall be notified prior to the water supply test. Water supply tests shall be witnessed by the *fire code official* or *approved* documentation of the test shall be provided to the *fire code official* prior to final approval of the water supply system.

507.5 Fire hydrant systems. Fire hydrant systems shall comply with Sections 507.5.1 through 507.5.6.

507.5.1 Where required. Where a portion of the facility or building hereafter constructed or moved into or within the jurisdiction is more than 400 feet (122 m) from a hydrant on a fire apparatus access road, as measured by an *approved* route around the exterior of the facility or building, on-site fire hydrants and mains shall be provided where required by the *fire code official*.

Exceptions:

1. For Group R-3 and Group U occupancies, the distance requirement shall be 600 feet (183 m).
2. For buildings equipped throughout with an *approved automatic sprinkler system* installed in accordance with Section 903.3.1.1 or 903.3.1.2, the distance requirement shall be 600 feet (183 m).

4.3 Transportation Networks and Street Designs

- 4.3.1 Intent
- 4.3.2 Transportation Network Plan
- 4.3.3 Block Size and Connectivity Requirements
- 4.3.4 Street Design Types
- 4.3.5 Intersection Designs
- 4.3.6 Block and Lot Access
- 4.3.7 Access Management for High-volume / High-speed Roadways

4.3.1 Intent

The Intent of this Section is to:

- a. Prioritize planning street networks and the design of street types as an important and substantial civic asset that establishes permanent patterns and the character of the public realm of the City.
- b. Provide for efficient and safe movement and access along all public ways through a variety of modes of transportation, including automobiles, bicycles, pedestrians, and potentially transit.
- c. Coordinate the findings of any required Transportation Impact Study or Transportation Impact Assessment with the development and division of land.
- d. Complement regional transportation systems with local networks that support multiple and alternative routes for daily trips, do not overly burden any single roadway, and include logical connections to existing, planned, or potential future streets.
- e. Coordinate available street designs with the appropriate transportation networks and development patterns.
- f. Plan street networks that allow the design of streets to transition along their length to best support anticipated and adjacent land uses and development patterns.
- g. Develop balanced street designs ("complete streets") for regional and local routes that accommodate all potential users of the street and rights-of-way, so that the interests of a single mode of transportation do not unnecessarily compromise other modes of transportation.

4.3.2 Transportation Network Plan

- a. **General Requirements.** All divisions of land shall include a transportation network plan that shall:

1. Comply with long range transportation plan and the master street plan, and provide a local street network for connections with these plans.
2. Comply with the findings of any Transportation Impact Study or Transportation Impact Assessment conducted for the area or required by the development, particularly incorporating recommended mitigation alternatives.
3. Provide connectivity at the local street level sufficient to meet the goals, policies and principles of the Comprehensive Plan and Transportation Plan.
4. Coordinate with planned land uses within the subdivision, and integrate with existing or planned and anticipated land uses beyond the subdivision.
5. Coordinate with other geographical, topographical and utility constraints.

Applications featuring small parcels or platting within previously developed area shall relate any proposed streets and access points to the surrounding existing transportation network according to these standards.

- b. **Functional Classification.** The functional classification of a street refers to the general function in the overall transportation system and addresses primarily the continuity of the street and the traffic capacity that it is designed for when considered in context of the entire transportation system. Functional classification does not necessarily dictate the cross section design or design on any one segment of the street. A number of different cross sections may be appropriate for a single functional classification depending on the extent of the surrounding transportation network, the planned and anticipated adjacent land uses, and the speeds desired for that particular segment of the street.

Table 4-5 provides planning parameters for the Transportation Network Plan based on the functional classification and the role of the street in the entire street network, including areas beyond the development site. Specific cross sections that may be applicable to segments of streets should be based on existing or planned land uses fronting on the segment and are provided in Section 4.3.4 Street Design Types.

- c. **Private Street Standards.** All roads and streets platted and constructed within new subdivisions shall be public. In some extraordinary cases where there is no public right-of-way, and no feasible means of access to public right-of-

ARTICLE 4

SUBDIVISION REGULATIONS

4.3 TRANSPORTATION NETWORKS AND STREET DESIGNS

TABLE 4-5: FUNCTIONAL CLASSIFICATIONS AND APPLICABILITY

Classification	Intent and Characteristics	Applicability*
<i>Interstate</i>	The interstate system provides high-speed movement of large volumes of traffic with minimum interference. This is accomplished through the use of access control, divided roadways, and grade-separated interchanges. Expressways can be expected to accommodate lower volumes of traffic, but where uninterrupted, high-speed movement is desired across broad areas.	Located only on the City's initiative through its official Major Roadway System Plan. Volume Range : 40,000 – 80,000 ADT
<i>Principal Arterial</i>	A street of considerable continuity over long distances that provides direct connections to different areas within the City and surrounding areas for large volumes of vehicles. Arterial streets are characterized by few interruptions, except at major community destinations, topographical obstacles, or important natural features.	Principal Arterial Streets should be located every 1 to 1½ miles apart, except more frequent location of Minor Arterials and Collector streets can result in less frequent need for Principal Arterial Streets. Volume Range: 15,000 to 50,000 ADT
<i>Minor Arterial</i>	A street of moderate continuity over medium distances that provides direct access between adjacent neighborhoods or districts for medium volumes of traffic. Minor Arterial streets are occasionally interrupted or diverted by neighborhood destinations or natural barriers.	Minor Arterials Streets should be located every 1/3 to 1 mile apart, except more frequent location of Collector Streets can result in less frequent need for Minor Arterial Streets. Volume Range : 7,500 to 35,000 ADT
<i>Collector</i>	A street of moderate continuity over medium distances that provides direct access between adjacent neighborhoods or districts for low volumes of traffic. Collector Streets are occasionally interrupted or diverted by neighborhood destinations or natural barriers, or intersections with higher order streets.	Collector Streets should be located every ¼ to ½ mile apart. Volume Range : 2,500 to 7,500 ADT
<i>Local</i>	A street of limited continuity that provides connections, local circulation, and access within neighborhoods and districts for low volumes of traffic. Local streets are interrupted frequently by intersections with higher order street classifications or by interruptions or off-sets in the street grid (i.e. "T"-intersections). Local streets should still maintain high connectivity to the transportation network, but should be designed to discourage regional through traffic.	Local Streets to meet the connectivity standards in Section 4.3.3. Generally Local Streets are located every 250' to 1000' apart. Volume Range : High volume: < 2,500 ADT Low volume: < 250 ADT

* This Applicability is for general planning purposes and should be interpreted with the Transportation Master Plan portion of *PlanCheyenne*. Additionally, a TIS, TIA or Transportation Network Plan may propose alternate applicability, provided the intent of this section is equally or better met by the modifications.

TABLE 4-6: STREET CONNECTIVITY / BLOCK SIZES

Context / Development Pattern*	Block Perimeter
<i>Downtown Neighborhood Business Activity Centers Mixed-use Activity Centers</i>	☐ 1,600' maximum perimeter; ☐ 500' maximum on any one block face; ☐ 200' minimum on any one block face
<i>Community/Regional Commercial Activity Center</i>	☐ 2,000' maximum; ☐ 600' maximum on any one block face; ☐ 250' minimum on any one block face
<i>Urban Residential</i>	☐ 2,200' maximum; ☐ 800' maximum on any one block face; ☐ 250' minimum on any one block face
<i>Urban Transition Residential</i>	☐ 2,600' maximum; ☐ 1,000' maximum on any one block face; ☐ 250' minimum on any one block face; Except no requirement if subdivided according the Open Space Subdivision guidelines in <i>PlanCheyenne</i>
<i>Commercial</i>	☐ 3,000' maximum perimeter ☐ 1,320' maximum on any one block face; ☐ 300' minimum on any one block face
<i>Industrial</i>	No requirement
<i>Rural / Agriculture</i>	No requirement
<i>Special Planning Districts</i>	No requirement; block sizes may be based on an overall development plan provided it supports the Transportation Network Plan for this property and adjacent properties.

* Per *PlanCheyenne*

ARTICLE 4

SUBDIVISION REGULATIONS

4.3 TRANSPORTATION NETWORKS AND STREET DESIGNS

way, it may be necessary for property owners to provide access by means of easements or other agreements and to construct a private access road. Such private access roads will not be constructed, maintained, repaired, or replaced by the City. Private accesses shall meet all requirements of the Cheyenne Fire Department.



In the event the owners of a private access road wish to convert the access to public use and public maintenance, the proposed road shall be dedicated to the public and accepted by the City as provided by law. The road or street shall be constructed at the applicant's expense in accordance with these standards and the plans, specifications, and construction approved as described for public streets.

4.3.3 Block Sizes and Connectivity Requirements

All Transportation Network Plans or subdivision applications platting new streets that connect to existing public streets shall propose an orderly system of blocks and lots. These standards shall be implemented consistent with the Transportation Master Plan, the Functional Classification and Street Design Type standards of this section, the Pedestrian and Bicycle Guidelines in Appendix G and any required Transportation Impact Study or Transportation Impact Assessment. Deviations that better meet the Intent of this Section may be required or approved by the City Council through applicable procedures and criteria established in Article 2.3.1, Subdivision Standard Waiver.

- a. **Block Sizes.** The block size standards are specified in Table 4-6, and shall be based upon the development pattern identified in the Comprehensive Plan. Standards are based on the perimeter formed by the centerline of the public street rights-of-way forming the block. For the purposes of the block perimeter measurement, alleys, cul-de-sacs, and disconnected streets are not considered streets. Blocks on the perimeter of the property being subdivided which are formed by the streets, any stub streets, and the subdivision boundary with property that may be subdivided in the future shall not exceed 60% of the maximum perimeter in Table 4-6. The length of the subdivision boundary is not considered in the 60% calculation. See Figure 4-1 for examples.
- b. **Arrangement.** Blocks shall be numbered consecutively within the subdivision and/or sections of an overall plat and arranged as follows:

1. All blocks shall be designed to provide two tiers of lots with each fronting on public streets.
 2. Double-frontage lots or single-tier blocks with lots backing to any street should be avoided, but may be approved by City Council. When single tier blocks are approved, Council may require additional design elements either in the right-of-way or easements to mitigate the adverse impacts of double frontage lots and blocks. Conditions may include but are not limited to requiring double frontage blocks to back to portions of the Civic Open Space system in Section 4.4 such as trail corridors, requirements related to unified fencing designs, or other conditions. Where single tier blocks are allowed, the minimum block lengths do not apply.
 3. Blocks may be irregular in shape if necessary to serve important urban design goals, transportation planning goals, or address topographic and natural features, provided they still meet the general street network and connectivity standards.
 4. Side lot lines should be substantially at right angles or radial to the lot frontage lines along the block face. All lot arrangements and dimensions shall meet the requirements of the zoning district. Unique lot designs will only be considered where they promote the intent of this Section and good civic design.
 5. Whenever feasible, each lot should face the front of a similar lot across the street. Transitions between distinct lot types and land uses should occur at the rear of lots internal to the block rather than across the frontage and public streetscape.
- c. **Exceptions.** The following exceptions to the Street Connectivity / Block Size standards in Table 4-6 may be granted by the Planning Commission or City Council, after consideration of the recommendations of the Planning and Development Department.
 1. **Natural Features & Open Space System.** Blocks or parcels abutting or containing important natural features, topographical constraints, or open space may be larger, provided the proposed street layout preserves important natural features or open space in accordance with the Open Space System standards in Section 4.4.
 2. **Regional Transportation Routes.** Blocks or parcels abutting intervening regional transportation routes such as highways or rail rights-of-way may be larger provided that street layouts and development patterns



FILING RECORD

VACATION STATEMENT


IT IS THE INTENT OF THIS PLAT TO VACATE ALL OF LOTS 2 THRU 18 WITHIN THE WATERFORD SQUARE R&D FILING, CITY OF CHICAGO, LAKE COUNTY, WISCONSIN, INCLUDING ALL INTERESTS THEREIN, AND TO RE-OPEN THE SAME TO THE CITY OF CHICAGO, LAKE COUNTY, WISCONSIN, AS SHOWN ON THE PLAT OF WATERFORD SQUARE R&D FILING.

GENERAL NOTES

- 1) THE CITY OF CHICAGO, LAKE COUNTY, WISCONSIN, IS THE OWNER OF THE PROPERTY SHOWN ON THIS PLAT.
- 2) THE CITY OF CHICAGO, LAKE COUNTY, WISCONSIN, IS THE OWNER OF THE PROPERTY SHOWN ON THIS PLAT.
- 3) THE CITY OF CHICAGO, LAKE COUNTY, WISCONSIN, IS THE OWNER OF THE PROPERTY SHOWN ON THIS PLAT.
- 4) THE CITY OF CHICAGO, LAKE COUNTY, WISCONSIN, IS THE OWNER OF THE PROPERTY SHOWN ON THIS PLAT.
- 5) THE CITY OF CHICAGO, LAKE COUNTY, WISCONSIN, IS THE OWNER OF THE PROPERTY SHOWN ON THIS PLAT.
- 6) THE CITY OF CHICAGO, LAKE COUNTY, WISCONSIN, IS THE OWNER OF THE PROPERTY SHOWN ON THIS PLAT.
- 7) THE CITY OF CHICAGO, LAKE COUNTY, WISCONSIN, IS THE OWNER OF THE PROPERTY SHOWN ON THIS PLAT.
- 8) THE CITY OF CHICAGO, LAKE COUNTY, WISCONSIN, IS THE OWNER OF THE PROPERTY SHOWN ON THIS PLAT.
- 9) THE CITY OF CHICAGO, LAKE COUNTY, WISCONSIN, IS THE OWNER OF THE PROPERTY SHOWN ON THIS PLAT.
- 10) THE CITY OF CHICAGO, LAKE COUNTY, WISCONSIN, IS THE OWNER OF THE PROPERTY SHOWN ON THIS PLAT.
- 11) THE CITY OF CHICAGO, LAKE COUNTY, WISCONSIN, IS THE OWNER OF THE PROPERTY SHOWN ON THIS PLAT.
- 12) THE CITY OF CHICAGO, LAKE COUNTY, WISCONSIN, IS THE OWNER OF THE PROPERTY SHOWN ON THIS PLAT.
- 13) THE CITY OF CHICAGO, LAKE COUNTY, WISCONSIN, IS THE OWNER OF THE PROPERTY SHOWN ON THIS PLAT.
- 14) THE CITY OF CHICAGO, LAKE COUNTY, WISCONSIN, IS THE OWNER OF THE PROPERTY SHOWN ON THIS PLAT.
- 15) THE CITY OF CHICAGO, LAKE COUNTY, WISCONSIN, IS THE OWNER OF THE PROPERTY SHOWN ON THIS PLAT.
- 16) THE CITY OF CHICAGO, LAKE COUNTY, WISCONSIN, IS THE OWNER OF THE PROPERTY SHOWN ON THIS PLAT.
- 17) THE CITY OF CHICAGO, LAKE COUNTY, WISCONSIN, IS THE OWNER OF THE PROPERTY SHOWN ON THIS PLAT.
- 18) THE CITY OF CHICAGO, LAKE COUNTY, WISCONSIN, IS THE OWNER OF THE PROPERTY SHOWN ON THIS PLAT.

LEGEND

- 3/4" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/2" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/4" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/8" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/16" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/32" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/64" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/128" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/256" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/512" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/1024" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/2048" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/4096" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/8192" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/16384" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/32768" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/65536" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/131072" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/262144" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/524288" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/1048576" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/2097152" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/4194304" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/8388608" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/16777216" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/33554432" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/67108864" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/134217728" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/268435456" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/536870912" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/1073741824" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/2147483648" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/4294967296" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/8589934592" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/17179869184" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/34359738368" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/68719476736" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/137438953472" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/274877906944" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/549755813888" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/1099511627776" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/2199023255552" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/4398046511104" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/8796093022208" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/17592186044416" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/35184372088832" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/70368744177664" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/140737488355328" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/281474976710656" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/562949953421312" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/1125899906842624" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/2251799813685248" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/4503599627370496" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/9007199254740992" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/18014398509481984" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/36028797018963968" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/72057594037927936" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/144115188075855872" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/288230376151711744" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/576460752303423488" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/1152921504606846976" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/2305843009213693952" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/4611686018427387904" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/9223372036854775808" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/18446744073709551616" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/36893488147419103232" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/73786976294838206464" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/147573952589676412928" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/295147905179352825856" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/590295810358705651712" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/1180591620717411303424" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/2361183241434822606848" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/4722366482869645213696" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/9444732965739290427392" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/18889465931478580854784" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/37778931862957161709568" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/75557863725914323419136" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/151115727451828646838272" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/302231454903657293676544" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/604462909807314587353088" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/1208925819614629174706176" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/2417851639229258349412352" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/4835703278458516698824704" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/9671406556917033397649408" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/19342813113834066795298816" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/38685626227668133590597632" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/77371252455336267181195264" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/154742504910672534362390528" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/309485009821345068724781056" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/618970019642690137449562112" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/1237940039285380274899124224" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/2475880078570760549798248448" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/4951760157141521099596496896" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/9903520314283042199192993792" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/19807040628566084398385987584" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/39614081257132168796771975168" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/79228162514264337593543950336" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/158456325028528675187087900672" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/316912650057057350374175801344" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/633825300114114700748351602688" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/1267650600228229401496703205376" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/2535301200456458802993406410752" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/5070602400912917605986812821504" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/10141204801825835211973625643008" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/20282409603651670423947251286016" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/40564819207303340847894502572032" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/81129638414606681695789005144064" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/162259276829213363391578010288128" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/324518553658426726783156020576256" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/649037107316853453566312041152512" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/1298074214633706907132624082305024" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/2596148429267413814265248164610048" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/5192296858534827628530496329220096" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/10384593717069655257060992658440192" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/20769187434139310514121985316880384" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/41538374868278621028243970633760768" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/83076749736557242056487941267521536" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/166153499473114484112975882535043072" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/332306998946228968225951765070086144" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/664613997892457936451903530140172288" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/1329227995784915872903807060280344576" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/2658455991569831745807614120560689152" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/5316911983139663491615228241121378304" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/10633823966279326983230456482242756608" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/21267647932558653966460912964485513216" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/42535295865117307932921825928971026432" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/85070591730234615865843651857942052864" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/170141183460469231731687303715884105728" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/340282366920938463463374607431768211456" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/680564733841876926926749214863536422912" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/1361129467683753853853498429727072845824" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/2722258935367507707706996859454145691648" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/5444517870735015415413993718908291383296" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/10889035741470030830827987437816582766592" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/21778071482940061661655974875633165533184" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/43556142965880123323311949751266331066368" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/87112285931760246646623899502532662132736" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/174224571863520493293247799005065244265472" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/348449143727040986586495598010130488530944" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/696898287454081973172991196020260977061888" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/1393796574908163946345982392040521954123776" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/2787593149816327892691964784081043908247552" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/5575186299632655785383929568162087816495104" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/11150372599265311570767859136324173632990208" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/22300745198530623141535718272648347265980416" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/44601490397061246283071436545296694531960832" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/89202980794122492566142873090593389063921664" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/178405961588244985132285746181186778127843328" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/356811923176489970264571492362373556255686656" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/713623846352979940529142984724747112511373312" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/1427247692705959881058285969449494225022746624" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/2854495385411919762116571938898988450045493248" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/5708990770823839524233143877797976900090986496" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/11417981541647679048466287755595953800181972992" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/22835963083295358096932575511191907600363945984" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/45671926166590716193865151022383815200727891968" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/91343852333181432387730302044767630401455783936" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/182687704666362864775460604089535260802911567872" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/365375409332725729550921208179070521605823135744" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/730750818665451459101842416358141043211646271488" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/1461501637330902918203684832716282086423292542976" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/2923003274661805836407369665432564172846585085952" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/5846006549323611672814739330865128345693170171904" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/11692013098647223345629478661730256691386340343808" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/23384026197294446691258957323460513382772680687616" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/46768052394588893382517914646921026765545361375232" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/93536104789177786765035829293842053531090722750464" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/187072209578355573530071658587684107062181445500928" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/374144419156711147060143317175368214124362891001856" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/748288838313422294120286634350736428248725782003712" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/1496577676626844588240573268701472856497451564007424" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/2993155353253689176481146537402945712994903128014848" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/5986310706507378352962293074805891425989806256029696" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/11972621413014756705924586149611782851979612512059392" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/23945242826029513411849172299223565703959225024118784" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/47890485652059026823698344598447131407918450048237568" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/95780971304118053647396689196894262815836900096475136" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/191561942608236107294793378393788525631673800192952704" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/383123885216472214589586756787577051263347600385905408" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/766247770432944429179173513575154102526695200771810816" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/1532495540865888858358347027150308205053390401543621632" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/3064991081731777716716694054300616410106780803087243264" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/6129982163463555433433388108601232820213568006174488512" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/1225996432692711086686677621720246564042713601234977728" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/2451992865385422173373355243440493128085427202469955456" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/4903985730770844346746710486880986256170854404939910912" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/9807971461541688693493420973761972512341708809879821824" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/1961594292288337738698684194752394502468341761975964368" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/3923188584576675477397368389504789004936683535951928736" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/7846377169153350954794736779009578009873367071903857472" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/15692754338306701909589473558019156019746734143807714944" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/31385508676613403819178947116038312039493468287615429888" x 1/4" LINE SHALL BE 1/4" ALUMINUM
- 1/6277101735322680763835789423207662407898693657523




INTERSTATE 80 (RW VARIES)

LOT 1

BLOCK 18

BLOCK 13

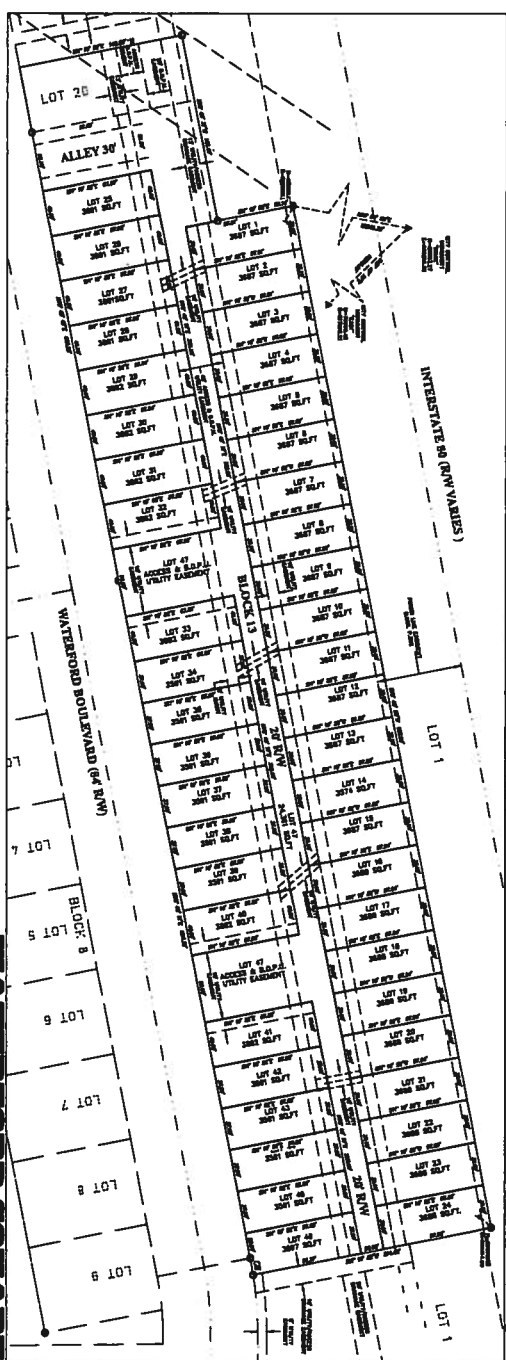

WATERFORD SQUARE 2ND FLOOR

SHEET 2 OF 2

A REPLAT OF LOTS 2 THRU 19
AND LOTS 21 THRU 57, BLOCK 8,
WATERFORD SQUARE,
CITY OF CHEYENNE,
LARAMEE COUNTY, WYOMING.
PREPARED JULY, 2016

 **STEEL SURVEYING SERVICES, LLC**
PROFESSIONAL LAND SURVEYORS
1108 W. 18th ST. CHEYENNE, WY. 82001 (307) 624-7773
706 CILBERT ST. THAILAND, VT. 05603 (307) 552-0789