JWEI

DENOVA



TEXTILE MANUFACTURING

MI 60

JWEI Multi-Layer Intelligent Cutting System

JWEI
SYSTEMTECHNIK

DENOVA

Established in 1993

Honest, pragmatic, innovative and win-win.

To be the leading automation solution provider based on digital cutting and AI technology

To make life colorful by intelligent manufacturing.

Specializing in R&D, production, and marketing of CAD/CAM systems

JWEI Cutting Room

Cutting of flexible materials

Independently developed MES intelligent production platform

National High-Tech Enterprise

Top 10 Software Enterprises

Top 10 Innovative Enterprises

A 50,000 m^2 smart factory with over 100 million yuan investment

Supporting customers in intelligent upgrading and digital transformation

Multiple automated industrial production lines

Authoritative certification system

Key software enterprise

Scientific management

30th
30 years of technological excellence

120+
Active in over 120 countries & regions

300+
More than 300 sales and service networks

30000+
Chosen by over 300, 000 global customers

8+
Servicing the needs of multiple industry sectors

200+
More than 200 patents and software copyrights



MI 60

JWEI Multi-Layer Intelligent Cutting System

DENOVA

Our innovation. Your success.



Product Specifications

JWEI reserves the right of final interpretation of the following parameters, subject to change without prior notice.

Model	MI60
Cutting height	60mm
Maximum running speed	100m/min
Maximum acceleration	9.8m/s^2
Maximum blade vibration frequency	6000rpm
Effective cutting window length	1.8m (equipped with cutting-while-moving function for continuous cutting)
Effective cutting width	2.0m
Vacuum adsorption option	Dynamic control, 45kW
Power supply	380V three-phase five-wire, 50/60Hz
Workbench height	85cm
Noise	<75dB
Vacuum energy consumption	Average energy consumption <15kW
Cutting materials	Knitted fabrics, denim, woven fabrics, automotive composite PVC, artificial leather, polyester and other flexible materials
Overall weight	About 4 tons
Machine Size (WxLxH)	2980mm×4570mm×2200mm

Note: The above are the design parameters of our company; specific data will vary depending on materials and applications.

Maximum running speed 100m/min

Cutting error ≤1mm

Strong vacuum durability 200mbar




100 m/min

Efficient production capacity, with a maximum running speed of 100m/min.



≤1 mm

Cut pieces and notches remain consistent on both upper and lower parts, with a cutting error of ≤1 mm.

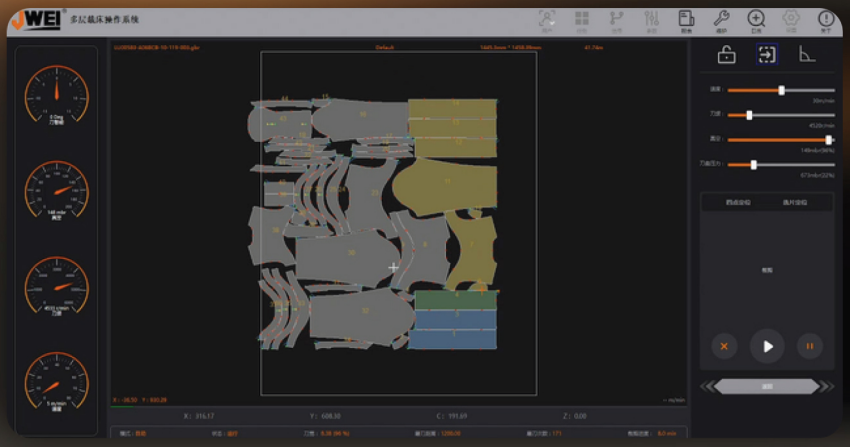

5%


Zero buffer saves up to 5% fabric. *



AI+MES

AIenhancesMESforsmarter decision-making.

DENOVA

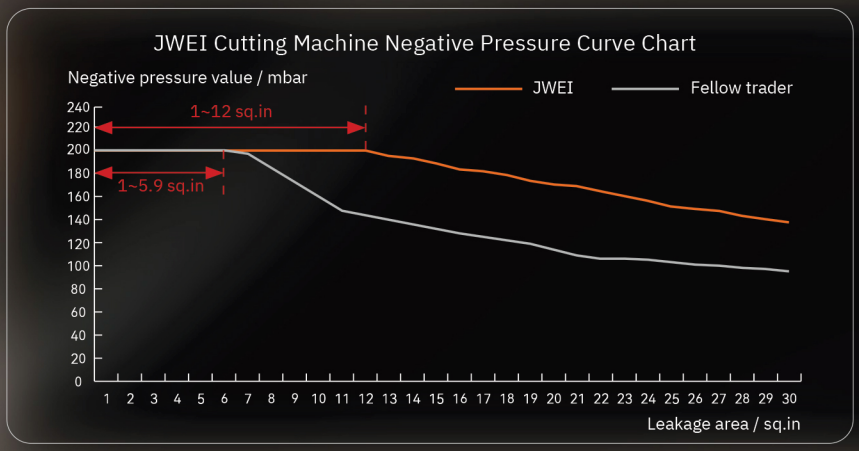

200mbar

The vacuum retention is more than twice the industry standard.




0.01 mm

Equipped with Beckhoff AX5206 servo (Germany), delivering control accuracy up to 0.01 mm.



40%

Self-developed algorithm enables “cutting while moving,” boosting average cutting efficiency by 40%. *

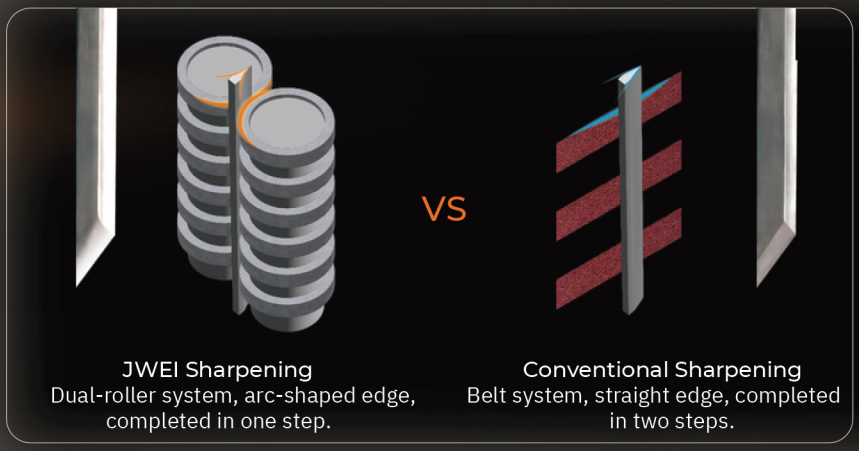

JWEI Sharpening
Dual-roller system, arc-shaped edge, completed in one step.

Conventional Sharpening
Belt system, straight edge, completed in two steps.

200%

Double efficiency with arc-shaped cutting edges. Upper and lower blades remain consistent, while dual-roller sharpening keeps them sharp at all times.

Note: *Results based on customer testing.



denovatec.com

Address: No. 1206, Jianlan Road,
Yinzhou District, 315040,
Ningbo, China

Hotline: +86 574 87913531 87900713
Email: info@jingwei.com.cn

WhatsApp

Authorised Agent for Sri Lanka 🇱🇰

DENOVA TECHNOLOGIES (PVT) LTD

(SL) + 94 777 395884
(NZ) + 64 27 5555880

16 A, Melford Crescent,
Dehiwala-Mount Lavinia,
Sri Lanka

Licensed Office - New Zealand 🇳🇿

DENOVA TECHNOLOGIES LTD

(SL) + 94 777 395884
(NZ) + 64 27 5555880

2 / 62, Colombo Street,
Cashmere,
Christchurch, New Zealand

Authorised Agent for Bangladesh 🇧🇩

DENOVA TECHNOLOGIES

(SL) + 94 777 395884
(BD) + 880 1817-079822
(NZ) + 64 27 5555880

71/2-A Hossaini Dalan Rd.
Chan Community Center,
Lift-4 Dhaka 1211, Bangladesh