

Accusense™ Indoor Current and Voltage Sensor CVS-24-I

The Accusense CVS-24-I sensor is an active 24kV combined current and voltage sensor for indoor use suitable for installation in air insulated switchgears or similar applications. It can be applied for both measurement and protection applications and there are options available for high accuracy voltage and high frequency measurement. Accusense CVS-24-I sensors can be also installed as standalone units. Post insulator design allows installation as a busbar support for conventional instrument transformers retrofitting.

GENERAL TECHNICAL PARAMETERS

Rated insulation level	24/50/125 kV
Supply voltage	±12 Vdc
Creepage distance	350 mm
Nominal frequency	50 Hz
Primary terminal capacity	1 pF
Weight	3,5 kg
Bending strength P ₀	2200 N
Applicable Standards	IEC 60044-7; 60044-8
Bandwidth (-3 dB)	30 Hz – 100 kHz for VS 30 Hz – 10 kHz for CS
Accuracy on harmonics	According to IEC 60044-8



CURRENT SENSOR PARAMETERS


Rated primary current, I _{pr}	630 A
Rated extended primary current factor, K _{pcr}	30
Rated primary time constant for transient performance, t _{pr}	40 ms
Rated short time withstand thermal current, I _{th}	16 kA / 3s
Dynamic nominal current, I _{dyn}	31,5 kA
Rated Continuous thermal Current, I _{cth}	1,2 I _{pr}
Nominal transformation ratio, K _{ra}	630 A / 0.2 V
Accuracy class *	Protection 5P30 Measurement 0.5

VOLTAGE SENSOR PARAMETERS

Rated primary voltage, U _{pn} *	20/√3 kV
Maximum voltage, U _m	24 kV
Rated secondary voltage, U _{sn} *	1 V
Rated voltage factor, K _u	1.9 for 8h
Nominal transformation ratio, K _n *	20/√3 kV / 1 V
Accuracy class *	Protection 3P Measurement 0.5

* marks parameters customized upon request

CVS-24-I Drawing

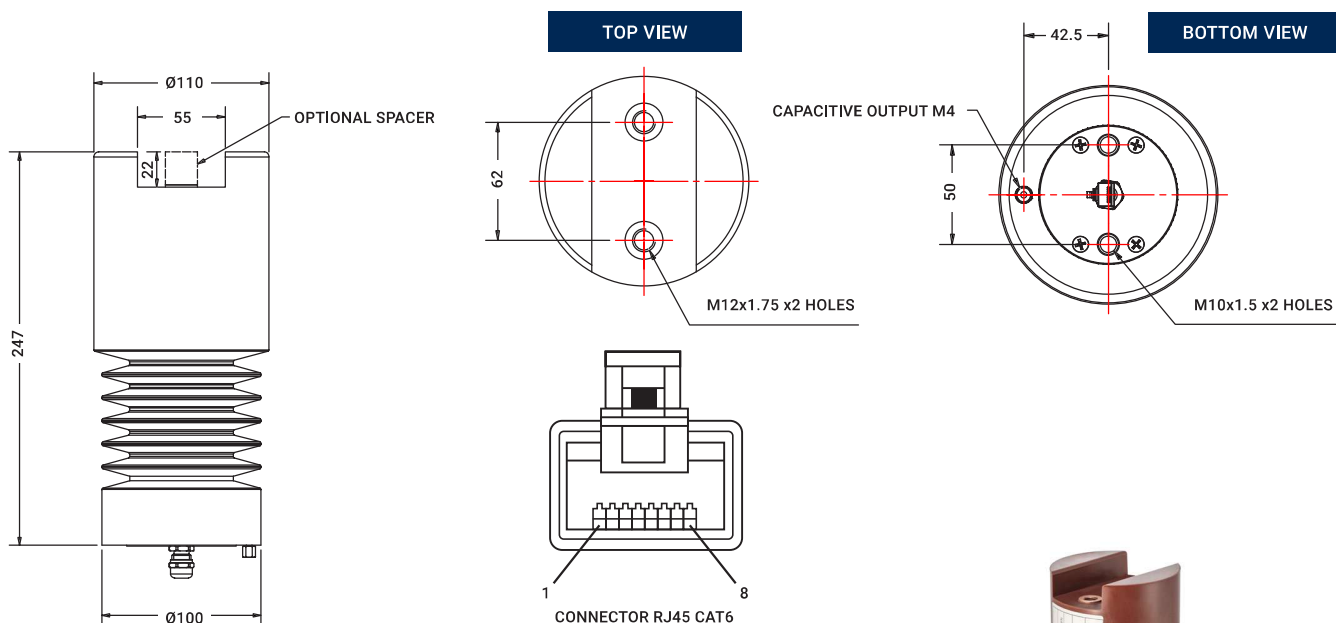

RJ45 PINOUT							
1	2	3	4	5	6	7	8
GND	GND	LPCT S2	LPCT S1	LPVT n	LPVT a	+VDC	-VDC

All linear dimensions are in millimeters.



For more information

please visit our website: www.gwelectric.com/high-accuracy-sensors



Since 1905, G&W Electric has been a leading provider of innovative power grid solutions including the latest in load and fault interrupting switches; reclosers; sensors; system protection equipment; power grid automation; transmission and distribution cable terminations; and joints and other cable accessories. G&W Electric is headquartered in Bolingbrook, Illinois, U.S.A., with manufacturing facilities and sales support in more than 100 countries, including Canada, Italy, China, Mexico, Brazil, India and Singapore. We help our customers meet their challenges and gain a competitive edge through a suite of advanced products and technical services.

gwelectric.com

©G&W Electric, 2025
GW92-Rev 2
2025.10/GF

Dystrybucja w Polsce: AIM Project Andrzej Grzybek; Rączki 58 C; 29-120 Kluczewsko; NIP 656 12 42 844; Tel. 506 005 137; @: a.grzybek@aimproject.pl; www.aimproject.pl