

## Technical Specifications

MODEL		AE 60	AE 100	AE 150
Rectification		2 pulse Fullwave	2 pulse Fullwave	2 pulse Fullwave
Ratings	mA	60mA (4 steps)	100mA (4 steps)	150mA (4 steps)
	kVp	40-100kVp(in Steps)	40-100kVp(in Steps)	40-100kVp(in Steps)
	mAs	0-220mAs	0-220mAs	0-220mAs
Tube type		Unit Compatible Stationary Anode	Unit Compatible Stationary Anode	Unit Compatible Stationary Anode
Timer		Microprocessor Controlled		
Power		4.8 KW	8 KW	12 KW
Power Supply		220V AC, 50Hz, 15 Amp		
Standardisation		BIS, AERB, ISO and CE approved		


### Unique Features:

**StandBy Circuitry:** Machine can still operate in case of failure of Main control panel.

**Automatic Selection of Bucky :** No need to remember the activation of Bucky, Bucky will be automatically switched ON where required.

**Exposure Counter:** Machine is provided with Exposure counter to keep track of total exposures taken.

### CR/DR Compatible

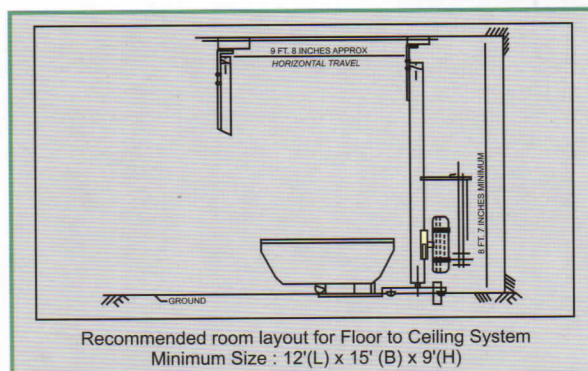

Manufactured by:

**ADONIS MEDICAL SYSTEMS PRIVATE LTD.**

E-70, Phase VIII, Industrial Area,  
Mohali (Near Chandigarh)-160 071

Tel.: +91-172-4001015

email: [marketing@adonismedical.com](mailto:marketing@adonismedical.com)

[www.adonismedical.com](http://www.adonismedical.com)

Specifications subject to change without prior notice.

**Authorised Dealer**

