



SECTION A-A

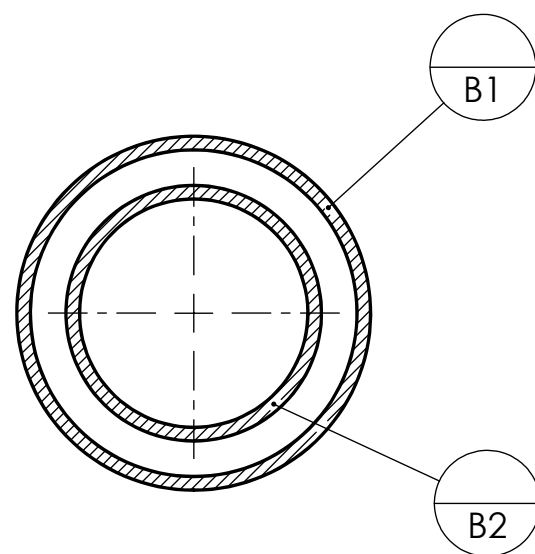

Note:
The intent for these tolerances is that the bushing set is matched, such that the length difference between the two bushings is lower than 0.003 mm. The absolute length is less critical (± 0.25 mm).

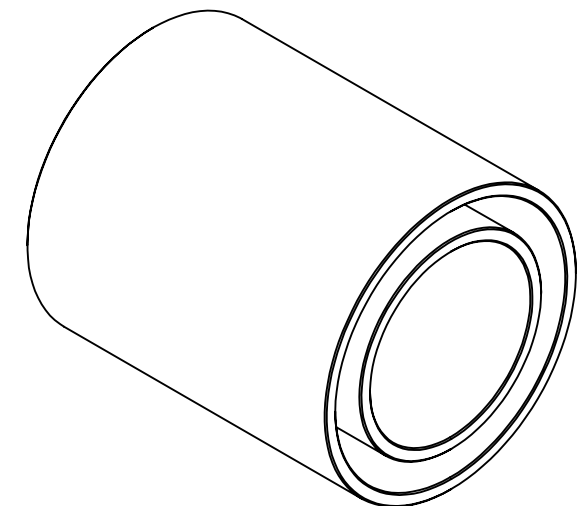

ITEM NO.	PART NUMBER	QTY.
1	PB-P-0001e - Bushing - Elbow positioning inner	1
2	PB-P-0001f - Bushing - Elbow positioning outer	1



DIMENSIONS ARE IN **MM**
INCL SURFACE/AFTER TREATMENT
UNLESS OTHERWISE SPECIFIED
DIM WITHOUT TOLERANCE ISO 2768mk
GEOMETRIC TOLERANCES ISO 1101
BREAK SHARP EDGES ISO 13715
ROUGHNESS ISO 1302
PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
NOBLEO TECHNOLOGY B.V.
ANY REPRODUCTION WITHOUT THE
WRITTEN PERMISSION OF NOBLEO
TECHNOLOGY B.V. IS PROHIBITED.

DOCUMENT STATUS

--

MATERIAL

--

SURFACE/HEAT/AFTER TREATMENT

--

ESTIMATED MASS: 0.21 KG

CREATED BY VS
CREATION DATE 27-07-2025
APPROVED BY --
APPROVAL DATE --/--/----

DRW NR
PB-A-00A00C -

REVISION
1.0

BUSHING TPD ASSY -
ELBOW
POSITIONING

SCALE
1:1
A3