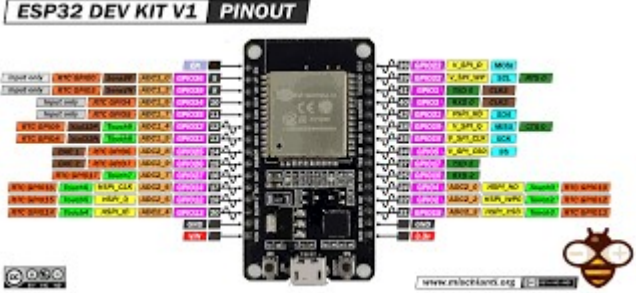






SMP

|                             |                                                                                                                                                                                                                                                                                                                                                                                             |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ESP32 DEV KIT V1            |  A detailed pinout diagram for the ESP32 DEV KIT V1. It shows the physical layout of the board with pins numbered 1 to 40. The diagram is color-coded to group pins by function: input-only, input/output, and output-only. It also includes a small image of the board and a logo for 'www.mikolaj.org'. |
| Sevor SG90 180 độ           |  A blue Sevor SG90 180-degree servo motor. It has a black and orange cable with a standard 3-pin servo connector. The motor is shown from a top-down perspective.                                                                                                                                         |
| RFID MFRC-522 NFC 13.56MHz  |  A blue RFID MFRC-522 NFC 13.56MHz module. It is a small circuit board with a white antenna coil. Below the module are two sets of pins: a 4-pin header and a 5-pin header. A blue keychain tag is also shown next to the module.                                                                        |
| LCD 16x2                    |  A 16x2 LCD display module. It has a green PCB and a blue LCD screen. The screen displays the text "hello.world!" and "SunFounder". The module has a 16-pin D-sub connector on the left and a 5-pin header on the right.                                                                                |
| Cảm biến vật cản hồng ngoại |  A blue infrared non-contact distance sensor module. It features a black sensor head with a lens, a blue potentiometer, and a 5-pin header. The module is shown from a top-down perspective.                                                                                                            |

|                                |                                                                                      |
|--------------------------------|--------------------------------------------------------------------------------------|
| Nút nhấn                       |    |
| Led                            |    |
| Buzzer                         |   |
| Pin 18650                      |  |
| Mạch sạc xả boost Pin 18650 5v |  |

|              |                                                                                    |
|--------------|------------------------------------------------------------------------------------|
| Công tắc     |  |
| Đế Pin 18650 |  |

PCB:
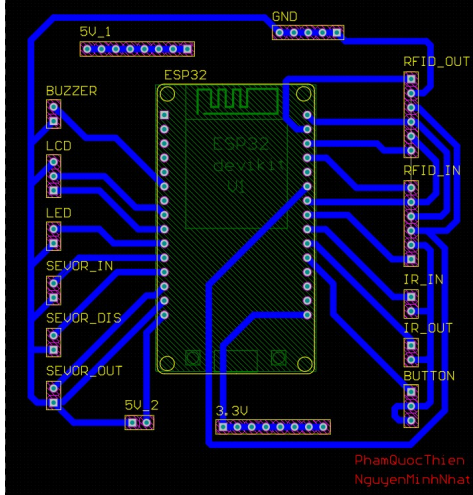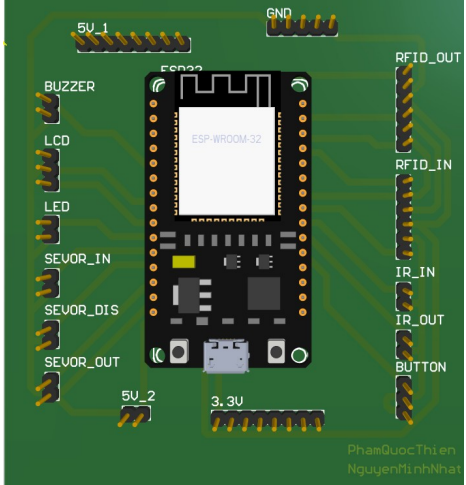
|    |                                                                                      |
|----|--------------------------------------------------------------------------------------|
| 2D |   |
| 3D |  |