


Adjust PS1 to 5.0 V before connecting U1. Open JP1 whenever USB is plugged into U1.

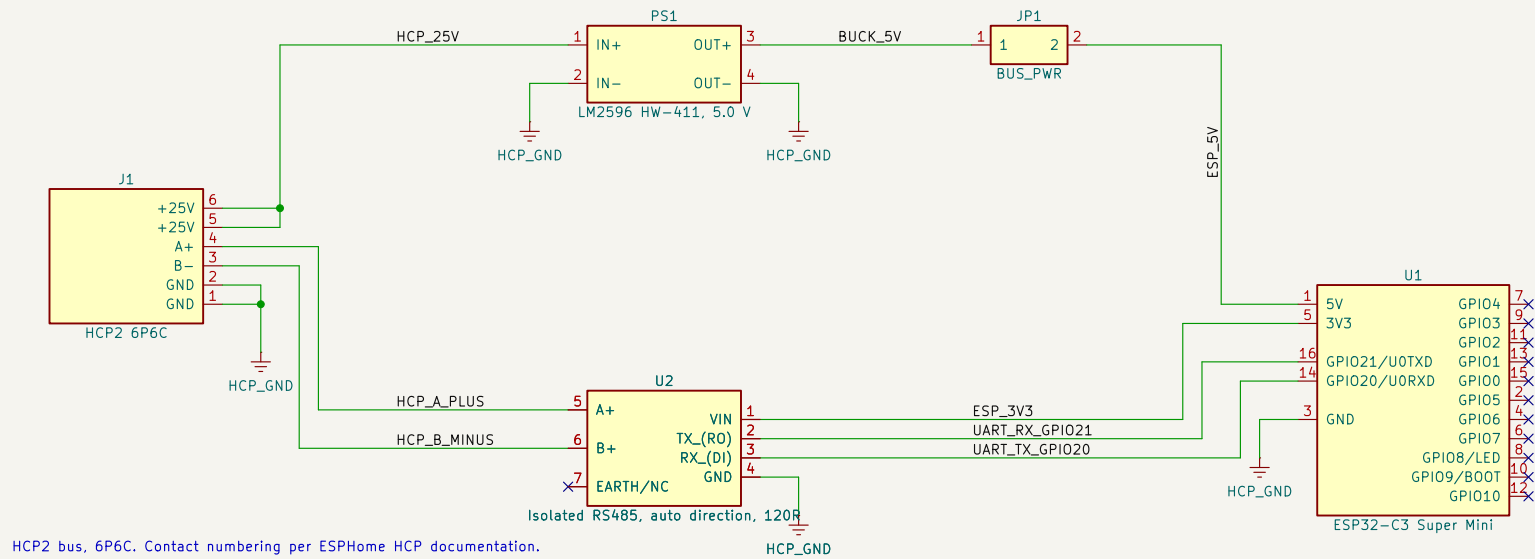

HCP2 bus, 6P6C. Contact numbering per ESPHome HCP documentation.

U2 is powered from 3V3 so its TX output stays at ESP32 logic level.

U2 pin names are from the module's own view: TX drives the ESP32, RX is driven by it.

Thies Gerken

Sheet: /
File: hcp.kicad_sch

Title: Hörmann HCP2 ESP32-C3 Adapter

Size: A4
KiCad E.D.A. 10.0.6

Date: 2026-09-05

Rev: 32cfa7

Id: 1/1