


Adjust PS1 to 5.0 V before connecting U1. Open JP1 whenever USB is plugged into U1.

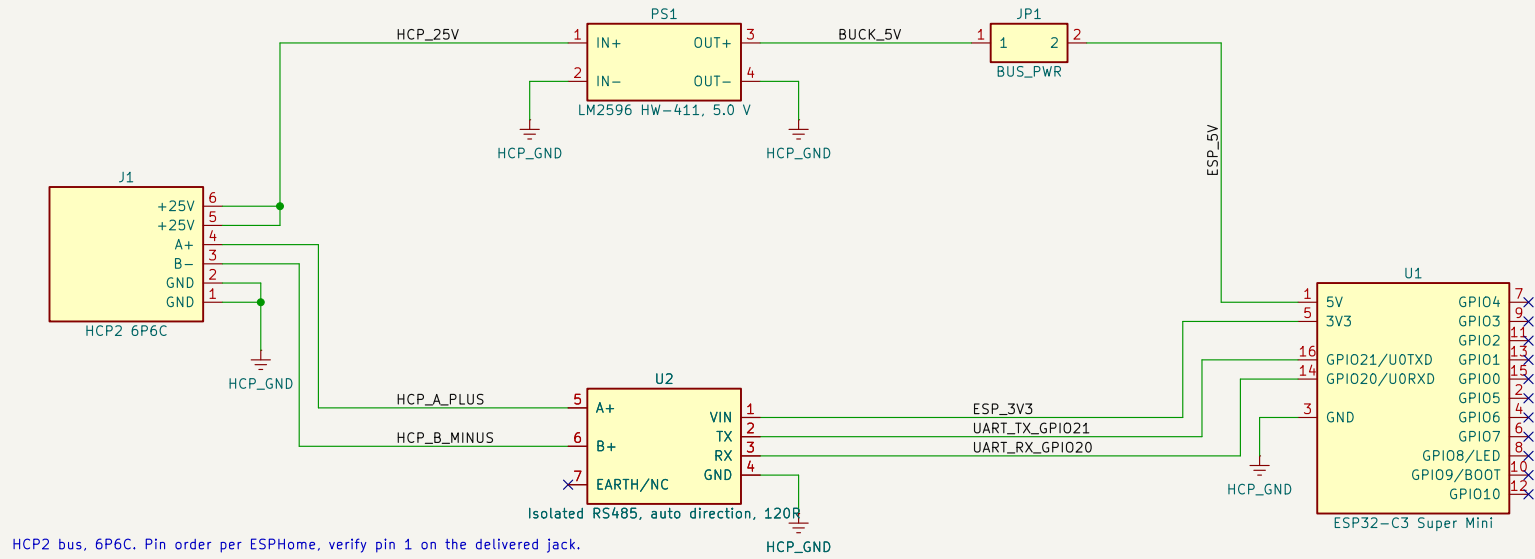

HCP2 bus, 6P6C. Pin order per ESPHome, verify pin 1 on the delivered jack.

U2 is powered from 3V3 so its RX output stays at ESP32 logic level.

Thies Gerken

Sheet: /

File: hoermann-hcp-adapter.kicad_sch

Title: Hörmann HCP2 ESP32-C3 Adapter

Size: A4

Date: 2026-09-05

Rev: 7fe4161

KiCad E.D.A. 10.0.6

Id: 1/1