


Adjust PS1 to 5.0 V before connecting U1. Open JP1 whenever USB is plugged into U1.

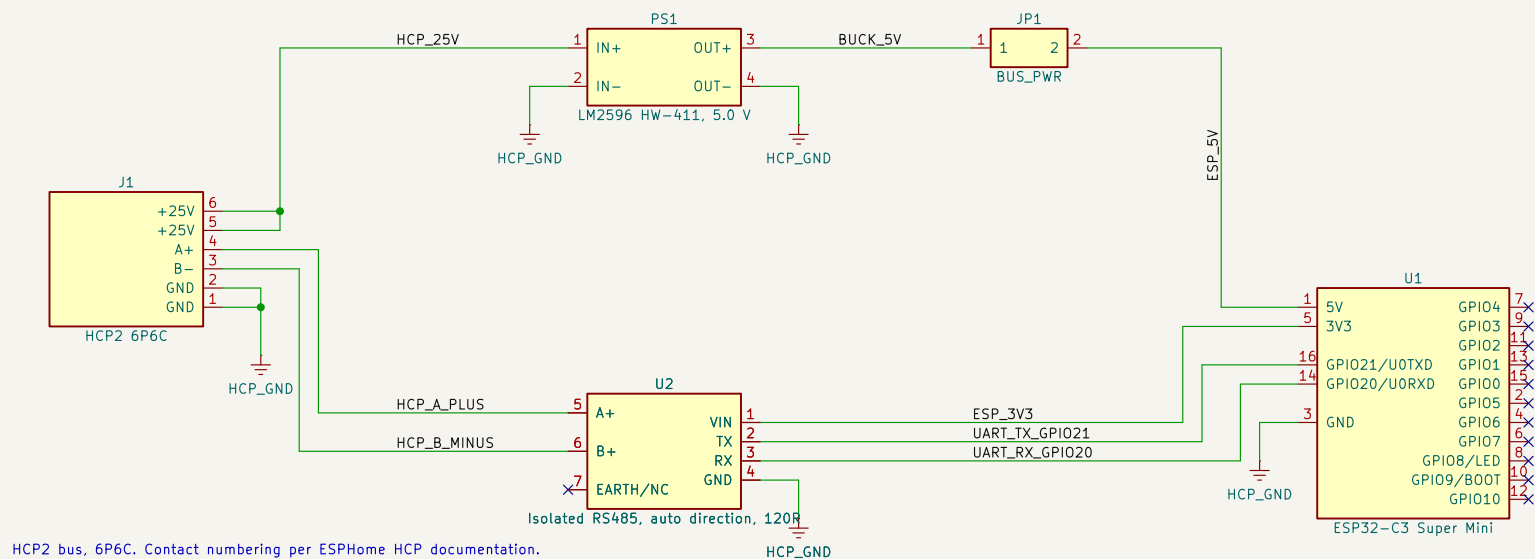

HCP2 bus, 6P6C. Contact numbering per ESPHome HCP documentation.

U2 is powered from 3V3 so its RX output stays at ESP32 logic level.

Thies Gerken

Sheet: /

File: hoermann-hcp-adapter.kicad_sch

Title: Hörmann HCP2 ESP32-C3 Adapter

Size: A4

Date: 2026-09-05

Rev: 1b34439

KiCad E.D.A. 10.0.6

Id: 1/1