


Adjust PS1 to 5.0 V before connecting U1. Open JP1 whenever USB is plugged into U1.

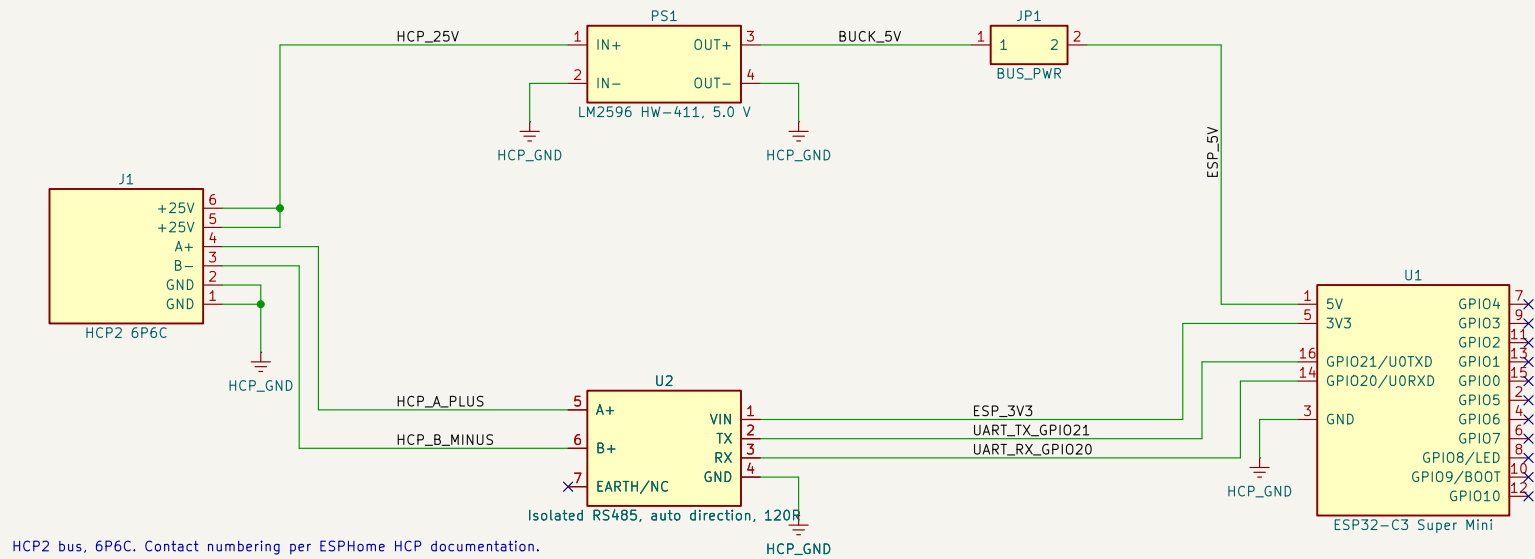

Thies Gerken

Sheet: /

File: hoermann-hcp-adapter.kicad\_sch

**Title: Hörmann HCP2 ESP32-C3 Adapter**

Size: A4

Date: 2026-09-05

Rev: cabe87e

KiCad E.D.A. 10.0.6

Id: 1/1