

DHB 均质乳化泵 DHB Homogeneous & emulsification pump

● 结构图
Structure scheme




产品介绍

DHB 均质乳化泵由3~5层转子和定子组成，每层转子和定子的齿盘由粗到细，使原始粗细不一的颗粒物料能顺利进入泵腔内进行逐层破碎、分散、精混、均质、乳化。是一种集破碎、分散、解聚、混合、精混、均质、乳化、输送为一体的高性能超细均质泵，也是化工流程工艺中主要的混合均质设备。

Product profile

DHB homogeneous & emulsification pump comprise 3-5 layers of stators and rotors. The alveolus of each layer stator and rotor is from wide to slender, let original asymmetric size material to enter pump chamber to breaking, dispersion, refinery, homogenization, emulsion step by step. They are high-efficiency compound fine homogeneous pumps for breaking, dispersion, disaggregation, compound, refinery, homogenization, emulsion and transmission, it is also major compound homogeneous equipment in chemical working procedures.

安装图 Installation map

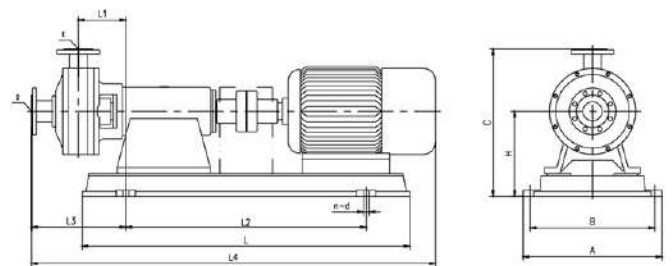

技术参数表 Technical parameters

型号 Type	功率 (kW)	转速 (r/min)	流量 (m³/h)	压力 (MPa)	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	A (mm)	B (mm)	C (mm)	D DN (mm)	E DN (mm)	H (mm)	n-d (mm)
DHB10-140	7.5	2900	2	0.2	970	185	660	365	1450	450	390	500	50	40	260	4-Φ18
DHB15-160	11	2900	5	0.2	970	180	660	370	1500	450	390	500	50	40	260	4-Φ18
DHB20-180	18.5	2900	10	0.2	1130	195	745	385	1600	500	440	600	65	50	320	4-Φ24
DHB25-200	22	2900	15	0.2	1130	190	745	390	1650	500	440	600	65	50	320	4-Φ24
DHB20-280	30	2900	20	0.2	1370	205	1005	390	1700	580	520	615	80	65	355	4-Φ24
DHB25-260	37	2900	30	0.2	1370	199	1005	394	1750	580	520	615	80	65	355	4-Φ24
DHB35-280	75	2900	50	0.2	1500	210	1100	420	1800	600	500	620	100	80	360	4-Φ24
DHB30-300	110	2900	80	0.2	1650	220	1200	420	2000	750	650	640	125	100	380	4-Φ28
DHB35-300	132	2900	100	0.2	1800	240	1300	440	2100	850	750	650	125	100	400	4-Φ28
DHB40-300	160	2900	120	0.2	2000	260	1500	460	2200	850	750	680	150	125	420	4-Φ28

注：以上安装尺寸仅供参考
Notice: all installation size only for reference