Run-to-run reliability of recall, by model and condition (t_4)

rel1 = mean ρ_pw over the three run pairs of k/6; rel3 = 3·rel1/(1 + 2·rel1). Descriptive; no verdict.

The noise floor against which the t_5 and t_6 waves will be read.

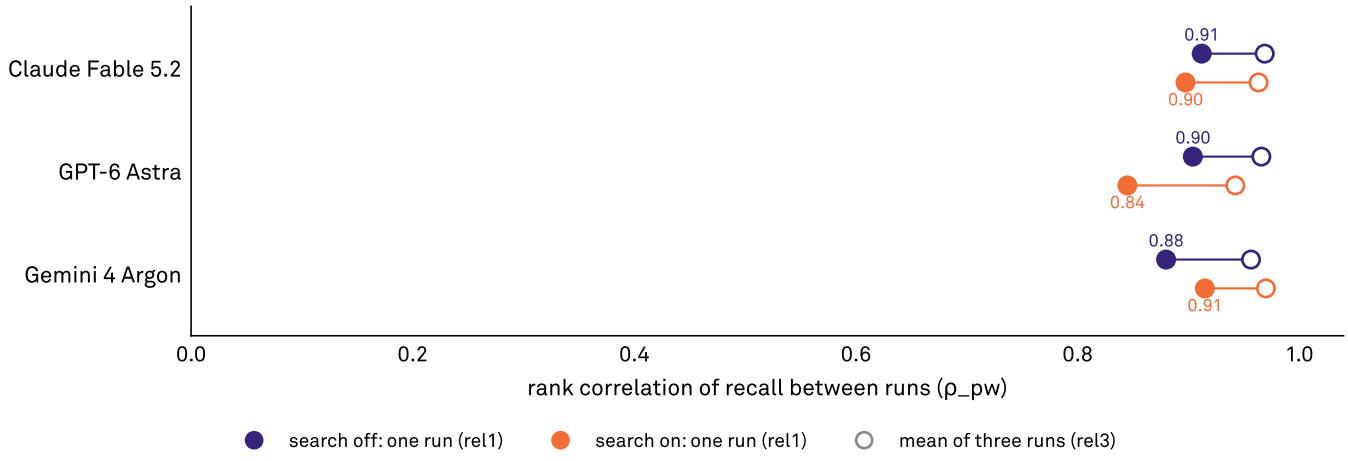

Descriptive 1 (pre-registered, section 2.7): run-to-run reliability of recall per model × condition

Source: AIAS™ v0.42, t_4 wave | pre-registration v0.42-prereg-r1 | t_3: v0.41 (SSRN 7685100) | φ: Methodology v1.8 (SSRN 6963359) | Third System™