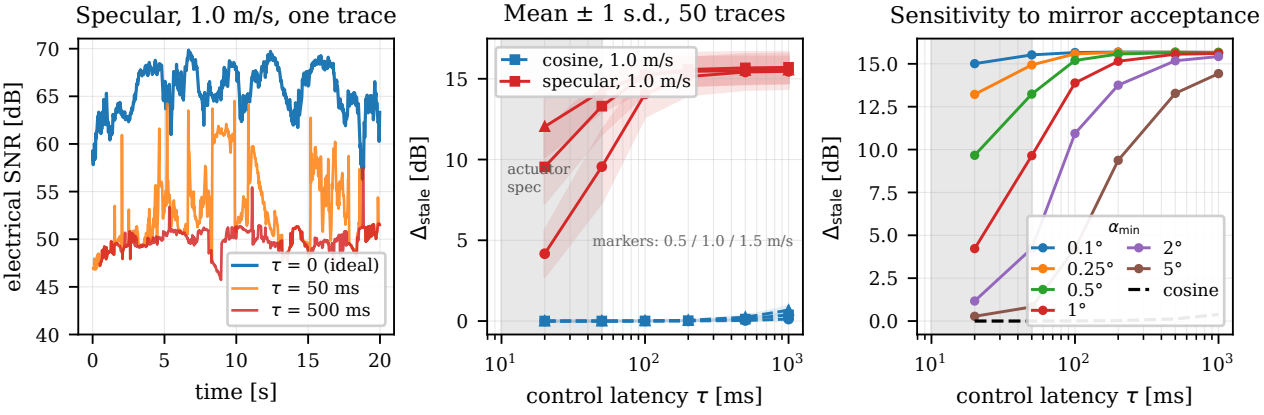
Specular, 1.0 m/s, one trace
electrical SNR [dB]
time [s]
τ = 0 (ideal)
τ = 50 ms
τ = 500 ms
Mean ± 1 s.d., 50 traces
cosine, 1.0 m/s
specular, 1.0 m/s
actuator
spec
markers: 0.5 / 1.0 / 1.5 m/s
Δstale [dB]
control latency τ [ms]
Sensitivity to mirror acceptance
αmin
0.1°
0.25°
0.5°
1°
2°
5°
cosine