


PRESS PLATE FOR SUPER MIRROR SHUTTERING PLYWOOD



SUPER-MIRROR SHUTTERING PLYWOOD

WE'RE THRILLED TO
ANNOUNCE THE
SUCCESSFUL TRIAL
OF HARDENED AND
HARD-CHROME
COATED PRESS
PLATES FROM
MOLDART, OFFERING
SUPERIOR QUALITY
SHUTTERING
PLYWOOD AT **LESS
THAN HALF THE
COST OF
IMPORTS!**

Attribute	Traditional Shuttering Plywood	Super Mirror Shuttering Plywood
Surface Roughness (RA)	>3.2 μm , leading to inconsistent surface finish and visible imperfections	<0.8 μm , resulting in a smooth, mirror-like finish due to hardchrome coating (70 HRC hardness)
Concrete Release	Requires heavy release agent application; friction coefficient 0.15-0.20	Minimal release agent needed; friction coefficient 0.02-0.05, enabling clean and easy separation
Reuse Cycles	10-15 cycles, with rapid surface degradation	30-40 cycles, maintaining surface quality due to hardened press plates (base: 30 HRC, surface: 70 HRC)
Surface Tolerance	± 0.5 mm variation across the surface	± 0.1 mm precision due to high-quality press plates, ensuring consistent thickness
Concrete Finish Quality	Class B/C finish per ACI 347R standards, with visible air voids (6-15 mm)	Class A finish per ACI 347R standards, with minimal air voids (2-4 mm) and uniform color
Production Consistency	Batch variation $\pm 15\%$, leading to inconsistent panel quality	Batch variation $\pm 5\%$, delivering consistent quality across production
Cost-Effectiveness	Low upfront cost but 40-50% higher finishing and labor costs	Slightly higher initial cost (2x), but 30-40% lower lifetime cost due to reduced labor and increased lifespan

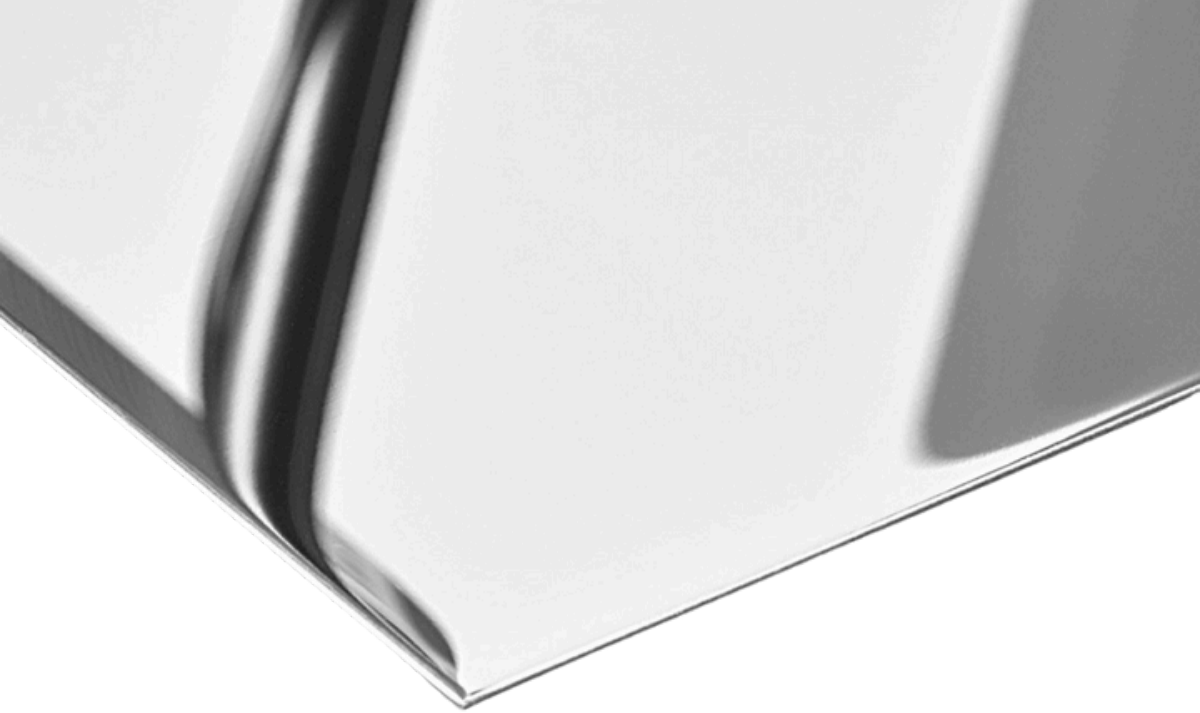

STARTING AT

₹27,500 PER PIECE

EXCLUDING TAXES; INCLUDES
PACKAGING AND LOGISTICS.

INTERNAL INSPECTION REPORT

SERIAL MARKING

●  20241210362 ●

ABRASION RESISTANCE TEST




GLOSS MEASUREMENT



SCRATCH RESISTANCE TEST



RA ROUGHNESS

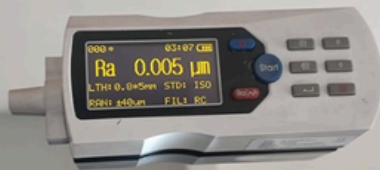

EXPORT CRATE



CHROME COATING THICKNESS REPORT

CTI 华测检测

REPORT DETAILS

检测报告 Test Report



报告编号 A2250019585101E
Report No. A2250019585101E

第1页共5
Page 1 of 5

报告抬头公司 纳方科技 (中山) 有限公司
Company Name

地址

Address

以下测试之样品及样品信息由申请者提供并确认
The following sample(s) and sample information was/were submitted and identified by/on the behalf of the client

样品名称 镀铬钢板
Sample Name Chrome plating
材质 201H
Material 201H
购买商 Team Moldart (India)
Buyer Team Moldart (India)
样品接收日期
Sample Received Date
样品检测日期
Testing Period

CTI 华测检测

SAMPLE PHOTO (SCALE REFERENCE)

检测报告 Test Report


报告编号 A2250019585101E
Report No. A2250019585101E

第3页共5
Page 3 of 5

测试样品
Tested Sample(s)

样品编号 Sample No.	样品名称 Sample Name	材质 Material
A2250019585101001	镀铬钢板 Chrome plating	201H

样品照片
Sample Photo(s)



CTI 华测检测

MICROSCOPIC EVALUATION IMAGE

检测报告 Test Report

报告编号 A2250019585101E
Report No. A2250019585101E

第4页共5
Page 4 of 5

测试项目: 镀层厚度
Test Item: Coating thickness

1. 测试设备 Test Equipment	设备名称 Equipment Name	设备型号 Model
设备编号 Equipment No. TTE20200160	金相显微镜 Metallographic microscope	BX53M

2. 环境条件 Environmental Conditions

温度 Temperature: 24°C; 湿度 Humidity: 49%RH

3. 测试标准 Test Standard: GB/T 6462-2005

4. 测试条件 Test Condition

a) 样品经抛光、研磨抛光后, 在显微镜下进行观察与拍照。

After the samples were insaid, ground and polished, observed and photographed under a microscope

b) 放大倍数 Magnification: 200X

5. 测试结果 Test Result(s)

样品编号 Sample No.	镀层厚度 Coating Thickness 单位 Unit: μm					
	位置 1 Point 1	位置 2 Point 2	位置 3 Point 3	位置 4 Point 4	位置 5 Point 5	平均值 Avg.
A2250019585101001	27.98	27.79	27.98	28.36	27.60	27.94

测试照片 Test Photo(s)

TEST METHOD & RESULTS



备注: 本报告中的测试结果供科研、教学、企业内部质量控制、企业产品研发等目的用。
Remark: The testing data and result(s) in this report (ref(s)) just for scientific research, education, internal quality control and product development etc.

声明:

Statement:

- 检测报告无批准人签字, “专用章”及报告骑缝章无效;
This report is considered invalid without approved signature, special seal and the seal on the perforation;
- 样品及样品信息由申请者提供, 申请者应对其真实性负责, CTI未核实其真实性;
The sample(s) and sample information was/were provided by the client who should be responsible for the authenticity which CTI hasn't verified;
- 本报告检测数据仅对受测样品负责;
The result(s) shows in this report refer(s) only to the sample(s) tested;
- 未经CTI书面同意, 不得部分复制本报告;
- 如检测报告中英文内容与中文内容有差异, 以中文为准。

In case of any discrepancy between the English version and Chinese version of the testing report(s) generated, the Chinese version shall prevail.

*** 报告结束 ***
*** End of Report ***

SPECIFICATION

PARAMETER	SS MA (¼-HARD AUSTENITIC)	SS 304 (REGULAR / ANNEALED)	SS 410 (QUENCHED-TEMPERED)	SS 633 (HARDENED 304 COIL)
CODE / SPEC	ASTM A240	ASTM A240 / GB T 20878	ASTM A276 / GB T 1220	633 COIL (GB T 4237-2015)
COMPOSITION (%)	C 0.10, CR 15–16, NI < 4	C ≤ 0.08, CR 18–20, NI 8–10.5	C 0.08–0.15, CR 11.5–13.5, NI ≤ 0.75	C 0.043, CR 18.76, NI 8.62
TENSILE STRENGTH (MPA)	862 MPA (125 KSI)	≥ 515 MPA	480–700 MPA	535 MPA (CERTIFIED)
YIELD STRENGTH (MPA)	517 MPA (75 KSI)	≥ 205 MPA	275–450 MPA	215 MPA (CERTIFIED)
ELONGATION (%)	~ 25 %	≥ 40 %	15–20 %	43 %
HARDNESS	280 HV (~ 28–30 HRC)	≤ 92 HRB (~ 14 HRC)	~ 45–50 HRC	335 HV (~ 32 HRC)
REMARKS	WORK-HARDENED AUSTENITIC; ECONOMICAL	SOFT AUSTENITIC; EXCELLENT CORROSION	MARTENSITIC; HIGH WEAR RESISTANCE; HPL	HARDENED COIL; PERFORMANCE > REGULAR 304

DECO METAL

HEAD OFFICE: #7, BUILDING NO. 1, NEW SONAL LINK INDUSTRIAL ESTATE, LINK ROAD, MALAD (WEST), MUMBAI – 400064, INDIA

MANUFACTURING UNIT: #9, NIDHI INDUSTRIAL ESTATE, OPP. GOLDEN TULIP BHOOTPADA, VASAI (EAST), GOLANI NAKA, VASAI EAST, MAHARASHTRA – 401208, INDIA

PHONE: +91-7208088788 | +91-7208188788

EMAIL: INFO@MOLDARTINDIA.COM

LINKEDIN: [YASH Doshi](#)

SCHEDULE A MEETING: [BOOK A TIME](#)

COMPANY PROFILE & CATALOG: [VIEW HERE](#)