




+91 95868 53777

+91 99747 53777

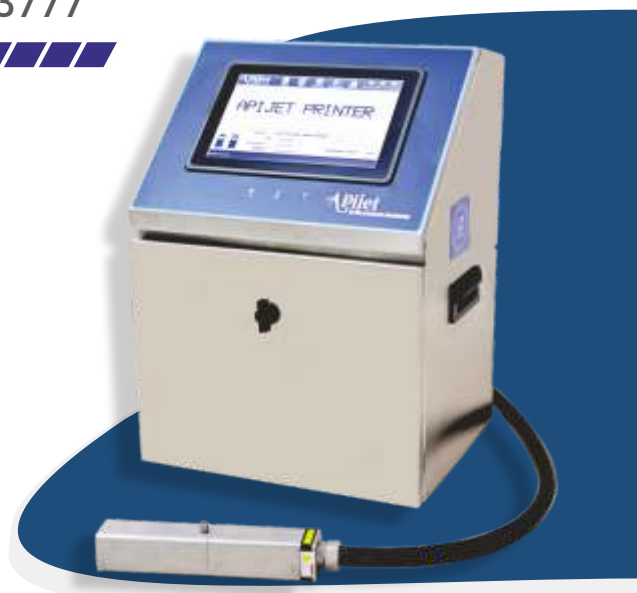

APIJET Inkjet Printer 900 Series

APIJET inkjet printers with high reliable performance and advance features which suitable for various production lines will create more value for you.

APIJET - 900 inkjet printer, it is designed with the stable Linux operation software to provide you with a better understanding of how your printer is performing. It adopts the reliable hydraulic pipeline system to bring the superior print quality small characters on a variety of substrates so you can avoid additional unplanned downtime and improve total cost of ownership through hints and tips based on your current printer operations. Adopting the advanced technology, it integrates the stable performance, convenient operation and use, wide application and reasonable use cost perfectly to provide you with high-quality service, so that you can easily control and obtain your inkjet needs.

Advantages & Benefits

Up to 5 lines of print
Variable nozzle size optional based on products Line speed up to (320m/min) with single line by 5*5 font Simple maintenance with quick disconnect replacement components

APIJET - 900 Features

Unique high-definition resolution up to 1280*800dpi, easy to operate tablet inspired 10.1", touch screen display with vivid icon interface.
The interface editing method is more convenient, and it can be easily realized by dragging, copying and pasting. Support all windows fonts, support vector fonts,

Main Application Fields

It provides superior quality small characters on a variety of substrates: porous, non-porous, smooth textured, curved, concave and more
It offers a reliable, yet cost effective solution for virtually any small character, primary package coding applications such as plastic bags, paper bags, paper, glass, metal, medicine box, cartons, electronic products, labels, nylon, ABS/PVC/PE, rubber, resins, ceramics etc.

Automatic Cleaning When Shutdown

The inkjet printer will execute an automatic cleaning procedure when it is shut down, ensuring that the nozzle is cleaned before it is shut down.

900 TECHNICAL PARAMETERS

* Single line 5x5 dot matrix, 315m/min (1033 ft / min)	* Vinyl-covered armored conduit; 9.8' (3m) umbilical
* Single line 7x5 dot matrix, 230m /min(754 ft / min)	length standard; 13.1' (4m) optional
* Double line 7x5 dot matrix, 81 m / min (265ft / min)	
* Three line 7x5 dot matrix, 48 m / min (157 ft / min)	
Font Matrix:	* One button printing start / stop, control print delay, reverse print, invert print, bold print, auto-start self-clean
* 1 row: 5X5, 7x5, 9x7, 11x7, 15x11,23x15, 32x24	
* 2 rows: 5x5, 7x5, 9x7, 11x7, 15x11, 23x15	* RS-232, 3 USB ports for communication/
* 3 rows: 5x5, 7x5, 9x7, 11x7, 15x11	alarm
* 4 rows: 5x5, 7x5, 9x7, 11x7	
Barcode Types:	
* Code39, Code128, EAN128, EAN-8, EAN-13,	
* UPC-A&E, QR code, Data Matrix	
Message Height:	Nozzle Size:
* Minimum: 1mm~20mm (0.04 ~0.8inch, variable depends on fonts	* 60µm nozzle standard, 70µm 50µm and 40µm nozzle optional
Distance between head to object:	Communications:
* Optimum: 10-15mm (0.4-0.6in)	* Coms Input-Photocell/trigger, encoder, reverse print, external counter increment
* Range: 0.5mm (0.2in) ~25.4mm (1in)	* Coms Outputs-Alarm light (3-color), print ready, warning
Input Language & Interface:	Optional:
* English, Chinese, Arabic, Persia, Latin, Russian etc.	* Encoder & Sensor
* English, Chinese, Arabic, Vietnam, Thailand, Persia, France, Germany, Korea, Spanish, etc.	



2D SYSTEM

Surat (INDIA)

+91 95868 53777 +91 99747 53777 2dsystem777@gmail.com