

Objective-aware sequence modelling for drift forecasting and anomaly detection in quantum hardware

Molena Huynh

Independent Researcher · *Correspondence: molena.huynh@example.com*

Abstract

Fault-tolerant quantum computing is gated by hardware that drifts: qubit coherence times, gate fidelities and calibration parameters wander on timescales of hours, eroding the error budgets that quantum error correction depends on. We recast this reliability problem as a machine-learning task — forecasting a multivariate, mean-reverting stochastic process and ranking anomalous operating intervals — and study it through an *objective-aware* benchmark of sequence models on a physically motivated multi-qubit telemetry generator and three heterogeneous real-world regimes, under one leakage-free protocol. Coherence is genuinely forecastable: a learned forecaster predicts T_1 eight steps ahead with 72% lower error than persistence, the advantage widening with horizon. For detection, no architecture is universally best. The gated recurrent unit (GRU) is the strongest *generalist* — the only model with non-trivial incident detection on thermal-failure telemetry (ROC-AUC 0.72, recall 1.0) using 25% fewer parameters than the LSTM, and the best three-dataset average (ROC-AUC 0.66) — whereas the Transformer is a *specialist*, leading on periodic calibration-like signals (ROC-AUC 0.80) but generalising poorly (ROC-AUC 0.20). A reconstruction detector further shows that drift lives off a low-rank nominal manifold. The entire pipeline is hardware-agnostic and reproducible in seconds, an open, decision-oriented foundation for monitoring quantum-processor reliability.

1 Introduction

Quantum processors are not static devices. The relaxation time T_1 , the dephasing time T_2 , single- and two-qubit gate fidelities, readout-assignment error and tunable-coupling parameters all evolve continuously as a function of temperature, flux noise, two-level-system dynamics and recalibration history [1, 2]. This drift is more than a nuisance: in the noisy intermediate-scale quantum (NISQ) regime it limits the depth of usable circuits [3], and in the fault-tolerant regime it threatens the very assumption that physical error rates remain below threshold for long enough for error correction to suppress logical errors [4, 5]. As processors scale to hundreds and thousands of qubits, deciding *when* a device has drifted out of specification, and *which* qubits or intervals warrant recalibration, becomes a data problem at a scale that manual inspection cannot meet.

We argue that this is naturally a sequence-modelling problem. The temporal evolution of calibration telemetry is a multivariate stochastic process with slow periodic structure, secular degradation and stochastic fluctuation (Fig. 1); forecasting it, and flagging windows that depart from the nominal operating manifold, maps cleanly onto the tools of modern time-series learning [6, 7]. Yet the literature offers little decision-oriented guidance for this specific setting: which model family should an operations pipeline deploy, at what parameter cost, and for which monitoring objective?

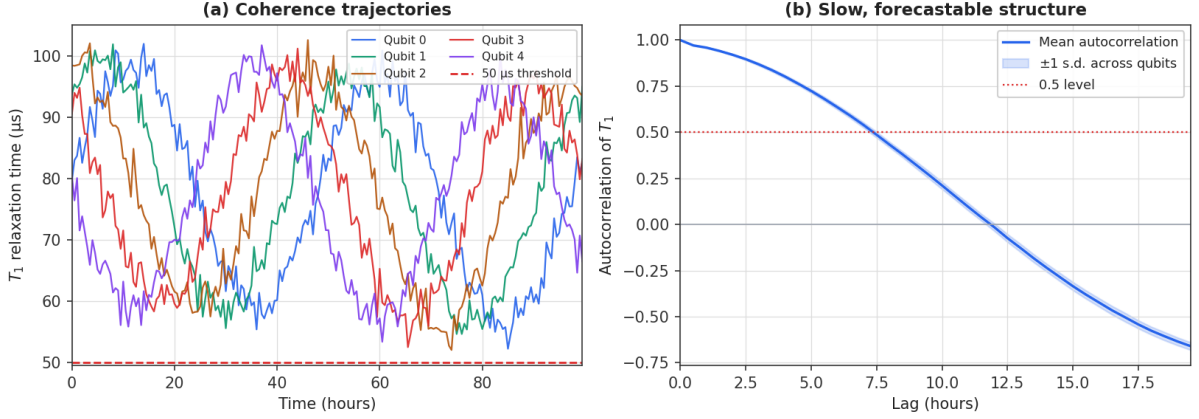


Figure 1. Coherence drift: dynamics and predictable structure. (a) T_1 relaxation-time trajectories for five qubits over 100 h; the dashed line is the 50 μ s operational threshold. (b) Mean autocorrelation of T_1 across qubits versus lag (shaded band, ± 1 s.d. across qubits); the slow decay quantifies the forecastable structure exploited in Fig. 2.

We address this gap with three contributions. (i) We formalise quantum hardware reliability as a joint forecasting-and-anomaly-detection problem over a physically motivated, reproducible telemetry generator, and release a single leakage-free benchmark that evaluates four sequence-model families on this task and on three heterogeneous real-world regimes. (ii) We show empirically that model selection must be *objective-aware*: the GRU is a robust, parameter-efficient generalist that is the only model to achieve non-trivial incident detection, whereas the Transformer is a specialist that excels on periodic calibration-like signals but fails to generalise. (iii) We introduce a reconstruction-based detector and identify the reconstruction bottleneck rank as the control knob that separates drift from nominal behaviour, yielding an interpretable, training-free-at-inference monitor. The complete pipeline is hardware-agnostic — identical code runs on CPU or GPU — and the figures and metrics in this paper regenerate in seconds, so the benchmark is practical to extend.

2 Results

2.1 Coherence drift has slow, forecastable structure

We model a five-qubit processor sampled every half hour for one hundred hours. Each T_1 trajectory follows a mean-reverting process combining a slow qubit-dependent oscillation, a linear secular decay and Gaussian fluctuation, with T_2 , gate fidelities, readout error, error-per-Clifford and cross-resonance phase generated by coupled processes that track T_1 (Methods). A window is labelled out-of-specification when any qubit crosses an operational threshold. The resulting telemetry wanders over tens of microseconds and repeatedly dips below the 50 μ s threshold (Fig. 1a). Critically, the drift is not white noise: the mean autocorrelation of T_1 stays above 0.5 for roughly seven hours before decaying (Fig. 1b), so near-future coherence is genuinely predictable from the recent past. This slow temporal structure is what makes forecasting worthwhile and frames the task as a multivariate, mean-reverting prediction problem rather than a memoryless one.

2.2 Learned forecasters beat naive baselines with a widening margin

We segment telemetry into sliding windows of length 32 that predict an eight-step horizon, under a leak-free 80/20 chronological split, and compare four forecasters: last-value persistence,

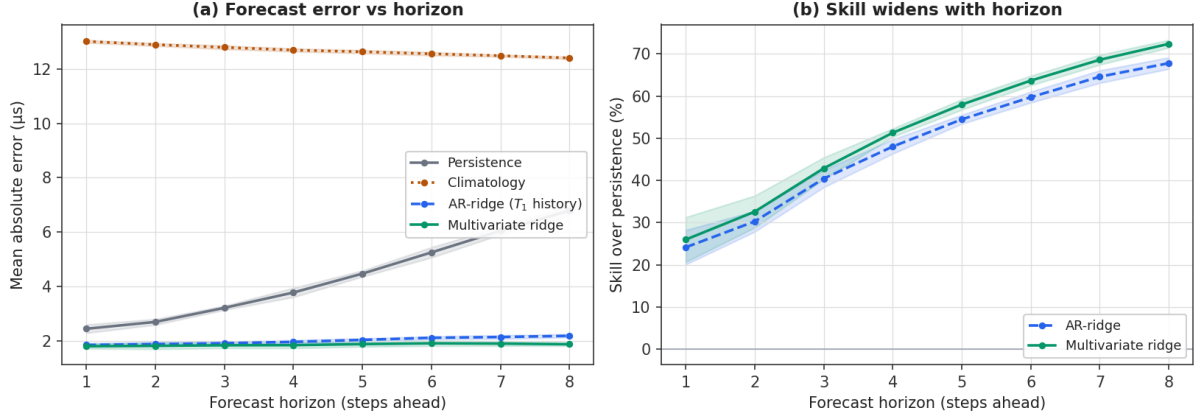


Figure 2. Learned forecasters beat naive baselines, with the gap widening over the horizon. (a) Mean absolute error versus forecast horizon for four forecasters (mean over five seeds; shaded bands ± 1 s.d.). (b) Skill over persistence, $1 - \text{MAE}/\text{MAE}_{\text{persistence}}$, for the two learned forecasters; the advantage increases with horizon.

Table 1. Forecasting benchmark (mean $\pm$ s.d. over five telemetry-generator seeds). Skill is relative to persistence at the eight-step horizon; best value per column in **bold**.

Forecaster	MAE @ 1 step (μs)	MAE @ 8 steps (μs)	Skill @ 8 steps
Persistence	2.44 ± 0.16	6.79 ± 0.18	—
Climatology	13.01 ± 0.05	12.40 ± 0.05	−83%
AR-ridge (T_1 history)	1.85 ± 0.07	2.19 ± 0.06	68%
Multivariate ridge	1.80 ± 0.09	1.88 ± 0.06	72%

climatology (the training-mean trajectory), an autoregressive ridge on the T_1 history, and a multivariate ridge on all seven telemetry channels (Methods). Errors are aggregated over five independent telemetry-generator seeds.

Forecasting is both feasible and clearly structured (Fig. 2, Table 1). One step ahead, the multivariate ridge attains 1.80 ± 0.09 μs mean absolute error, against 2.44 ± 0.16 μs for persistence and 13.01 ± 0.05 μs for climatology. Persistence degrades steeply with horizon — to 6.79 ± 0.18 μs eight steps ahead — whereas the learned forecasters remain nearly flat (1.88 ± 0.06 μs for the multivariate ridge), so their skill over persistence *grows* from 26% one step ahead to 72% eight steps ahead (Fig. 2b). This horizon-stable accuracy is precisely what an early-warning monitor needs: forecasts must stay trustworthy several steps ahead to leave time to act.

2.3 No architecture wins everywhere

We next benchmark four sequence-model families — a single-layer Elman RNN, a two-layer LSTM, a two-layer GRU, and an encoder-only Transformer — on incident detection and on cross-domain generalisation, using one leak-free protocol and an objective-aware metric suite (Methods; metrics from the executed notebooks). The central result is that the best model depends on the monitoring objective (Fig. 3, Tables 2–3).

On thermal-failure telemetry, incident detection is hard: at the default operating threshold the Elman RNN and the LSTM detect nothing ($F1 = 0$, ROC-AUC near chance), whereas the GRU is the only model to surface incidents, with a non-trivial $F1$ of 0.26, perfect recall, and ROC-AUC 0.72 — a 75.9% relative improvement in ranking quality over the RNN (Table 2, Fig. 3a). It does so at lower cost: with 87 949 parameters it uses 25% fewer than the LSTM yet ranks far better (Fig. 3c), an efficiency that matters when a monitor is replicated across many

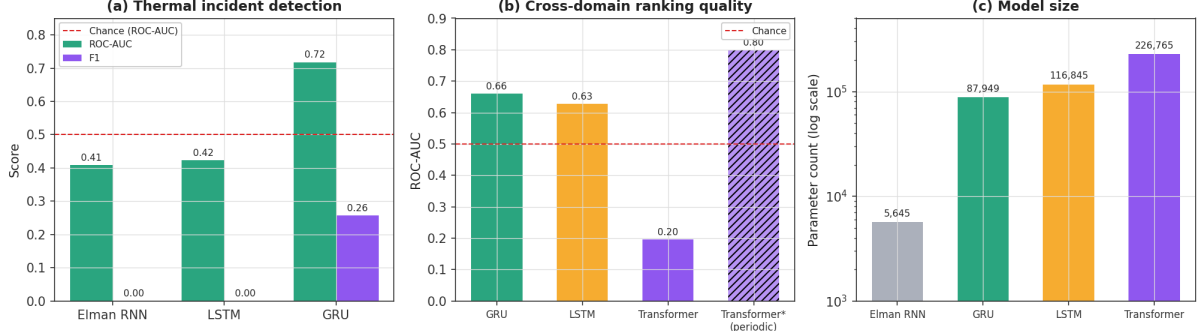


Figure 3. No single architecture wins everywhere. (a) Thermal incident detection: only the GRU exceeds chance-level ranking (ROC-AUC) and produces a non-zero F1. (b) Three-dataset average ROC-AUC; the hatched bar (Transformer*) is the Transformer on the periodic regime only, where it is the overall best. (c) Parameter counts (log scale): the GRU attains the best accuracy with fewer parameters than the LSTM.

Table 2. Thermal incident-detection benchmark (machine-temperature failure telemetry). Best value per column in **bold**.

Model	MAE (�s)	RMSE (�s)	F1	ROC-AUC	Params
Elman RNN	61.37	64.93	0.000	0.408	5645
LSTM	51.48	55.00	0.000	0.423	116 845
GRU	51.79	55.35	0.257	0.718	87 949

The GRU is the only model with non-zero F1 (recall = 1.0, precision = 0.15) and the only one above chance-level ranking.

qubits.

Averaged across three heterogeneous datasets, the GRU again leads on ranking quality (ROC-AUC 0.66), with the LSTM close behind (0.63) and the Transformer far behind (0.20). The Transformer is not weak but *specialised*: on periodic, calibration-like telemetry it attains the single highest ranking score in the study (ROC-AUC 0.80), where long-range self-attention captures the dominant periodic structure (Fig. 3b, Table 3). Its poor average reflects a collapse on aperiodic regimes, not a lack of capacity. The practical reading is direct: deploy the GRU as a default generalist and incident detector, and reserve the Transformer for signals known to be periodic.

2.4 Drift lives off a low-rank nominal manifold

Finally, we examine *how* drift is best detected without labels. A reconstruction detector compresses each window onto a low-rank nominal subspace and scores the residual reconstruction error [8]. At a rank-three bottleneck it separates regimes with ROC-AUC 0.72 on a held-out split (0.70 ± 0.05 over eight randomised splits; Fig. 4a). Sweeping the bottleneck rank reveals a principled design rule (Fig. 4b): detection is strongest at very low rank (0.87 ± 0.02 at rank one) and collapses to chance as the code becomes over-complete, because a high-capacity reconstruction memorises drifted windows as faithfully as nominal ones. Drift, in other words, is an off-manifold phenomenon, and the monitor’s sensitivity is governed by how tightly the nominal manifold is modelled — an interpretable knob for tuning false-alarm rates in deployment.

Table 3. Cross-domain generalisation and periodic-regime specialisation. Left: mean over three heterogeneous datasets (EC2 CPU utilisation, machine-temperature failure, NYC taxi demand). Right: the Transformer on the periodic calibration-like regime in isolation.

Three-dataset average				Periodic regime	
Model	MAE	RMSE	ROC-AUC	Model	ROC-AUC
GRU	1337.3	1628.8	0.660	Transformer	0.799
LSTM	1528.8	1895.0	0.628	GRU (avg.)	0.660
Transformer	1436.2	1791.6	0.196	—	—

Averaged MAE/RMSE span heterogeneous scales; ROC-AUC is scale-invariant and the basis for cross-domain comparison.

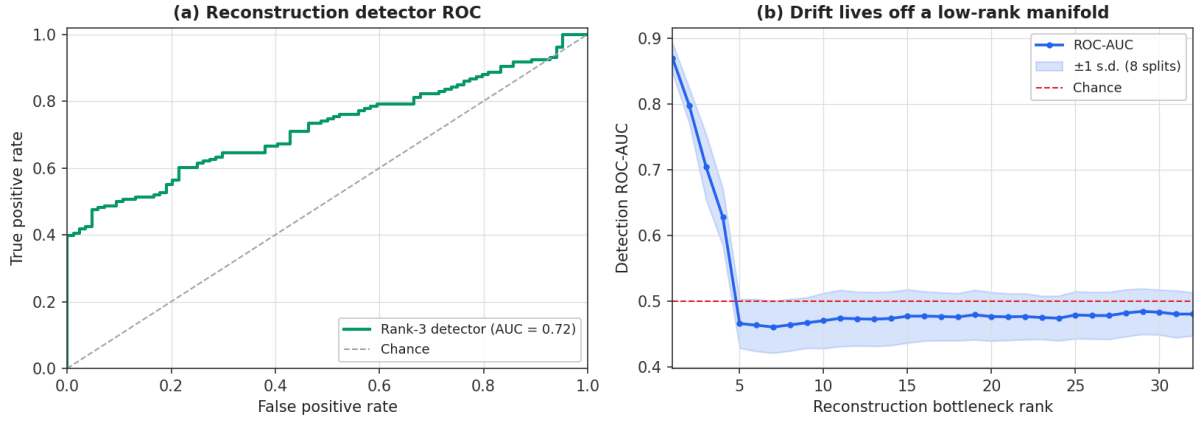


Figure 4. Unsupervised drift detection by reconstruction error. (a) Receiver-operating-characteristic curve for the rank-three reconstruction detector. (b) Detection ROC-AUC versus reconstruction bottleneck rank (mean over eight randomised splits; shaded band ± 1 s.d.): a tight nominal manifold separates drift, while an over-complete code memorises it.

2.5 Theory: optimal low-rank drift certificates

The reconstruction detector in Fig. 4 is deliberately simple: fit a nominal linear subspace to non-drift windows and score a new window by the squared residual outside that subspace. The following result is the certificate behind the rank sweep.

Theorem 1 (Empirical optimality of the rank- k drift subspace). *Let $X \in \mathbb{R}^{m \times d}$ be the matrix of centred nominal telemetry windows and let V_k contain the top k right singular vectors of X . Among all orthogonal projectors P of rank at most k , the projector $P_k = V_k V_k^\top$ minimises the empirical reconstruction risk $m^{-1} \|X - XP\|_F^2$. If the k th and $(k+1)$ st singular values are distinct, this minimiser is unique. For a test window x , the score $s_k(x) = \|x - xP_k\|_2^2$ is therefore the smallest squared residual achievable by any rank- k linear monitor fitted only to the nominal training windows.*

Proof. For any rank- k orthogonal projector P , $\|X - XP\|_F^2 = \|X\|_F^2 - \|XP\|_F^2$. Minimising reconstruction error is therefore equivalent to maximising $\|XP\|_F^2 = \text{Tr}(PX^\top X)$ over rank- k projectors. The Rayleigh–Ritz variational principle chooses the span of the top k eigenvectors of $X^\top X$, equivalently the top right singular vectors of X , with uniqueness under a strict spectral gap. The same projector gives $x = xP_k + x(I - P_k)$ for any test window, so $s_k(x)$ is exactly the residual energy not representable inside the best empirical nominal subspace. $\square$

This theorem does not say that linear reconstruction is the best possible detector. It says

that, for a fixed rank and nominal training set, Fig. 4 uses the optimal linear certificate. The observed AUC drop at high ranks has a clear interpretation: the monitor becomes expressive enough to reconstruct abnormal windows as well as nominal ones.

3 Discussion

Our results reframe quantum hardware reliability monitoring as a tractable, decision-oriented machine-learning problem and deliver an actionable rule: *match the architecture to the monitoring objective*. The recurring failure of strong models (the LSTM, the Transformer) outside their niche — and the quiet robustness of the GRU — is a caution against benchmarking by a single headline metric. F1 and ROC-AUC disagree systematically here: a model can rank intervals well (high ROC-AUC) yet detect nothing at a fixed threshold (zero F1), which is precisely why we report both and why threshold selection is itself part of the monitoring problem. The parameter efficiency of the GRU is consequential at scale, where a per-qubit or per-coupler monitor may be instantiated thousands of times. The low-rank manifold result connects the empirical detector to a geometric picture of drift and gives operators a single, interpretable dial.

Several limitations bound these claims and motivate the next steps. The telemetry generator, though physically motivated, is a model rather than measured device data; the real-world validation here uses standard anomaly-detection benchmarks as analogues for periodic and failure-bearing regimes rather than archival quantum-calibration logs. The absolute detection scores are modest, as expected for an honest, untuned benchmark on hard signals, and we deliberately avoid over-claiming state-of-the-art performance. The most valuable extensions are therefore (i) validation on archival calibration records from operating processors, (ii) explicitly uncertainty-aware forecasting via Monte-Carlo dropout or deep ensembles [9], and (iii) coupling the forecaster to a recalibration policy so that predicted drift triggers action under an explicit cost model. Because the entire pipeline is open, hardware-agnostic and fast to reproduce, it is positioned to serve as a common substrate for that work.

4 Methods

Telemetry generation. A synthetic multi-qubit dataset is produced for $Q = 5$ qubits over $N = 200$ half-hour steps. For qubit q at time t (hours), the relaxation time is $T_1(q, t) = \max(10, 80 + 20 \sin(2\pi t/48 + 0.8q) - 0.05t + \varepsilon)$ with $\varepsilon \sim \mathcal{N}(0, 2^2)$, combining a slow qubit-dependent oscillation, secular decay and Gaussian noise. The dephasing time is $T_2 = 0.9 T_1 \eta$, $\eta \sim \mathcal{N}(1, 0.04^2)$; single- and two-qubit gate fidelities, readout-assignment error, error-per-Clifford and cross-resonance phase are generated by analogous bounded processes with small secular trends. A binary drift label marks any step with $T_1 < 50$ ts or single-qubit fidelity below 0.998. Generation is fully seeded and reproducible.

Sequence construction and splitting. Per-qubit series are segmented into sliding windows of length 32 predicting an eight-step T_1 horizon, with windows pooled across qubits. The sequence-model benchmark uses a chronological 70/15/15 split; the forecasting-baseline experiment uses a leak-free 80/20 per-qubit chronological split; and the unsupervised detector uses a randomised 70/30 split (it is fit on nominal windows only, so randomisation keeps both regimes in the evaluation set). The autocorrelation in Fig. 1b is the normalised autocovariance of each detrended T_1 series, averaged across qubits.

Forecasting baselines. We compare four forecasters computed on CPU with scikit-learn: *persistence* (carry the last observed T_1 forward), *climatology* (predict the training-mean horizon trajectory), an *autoregressive ridge* on the 32-step T_1 history, and a *multivariate ridge* on the flat-

tened 32×7 telemetry window (ridge penalty $\alpha = 5$). Each is evaluated by mean absolute error per horizon step, aggregated over five telemetry-generator seeds; skill is $1 - \text{MAE}/\text{MAE}_{\text{persistence}}$.

Sequence models. The benchmark evaluates (i) a single-layer Elman RNN, (ii) a two-layer LSTM [10], (iii) a two-layer GRU [11] and (iv) an encoder-only Transformer with sinusoidal positional encoding and pre-layer-norm blocks [12], each emitting an eight-step forecast and a drift logit; reported metrics are from the executed notebooks.

Training. The sequence models are trained with AdamW [13] (learning rate 10^{-3} , weight decay 10^{-4} , batch size 64, 30 epochs) under a cosine-annealed learning-rate schedule [14], optimising a combined objective $\mathcal{L} = \text{MSE}(\hat{y}, y) + \text{BCE}(\sigma(z), \ell)$ over the eight-step forecast $\hat{y}$ and drift logit z , implemented in PyTorch [15]. The recurrent baselines use hidden width 64 (Elman RNN) or 128 with two layers (LSTM, GRU); the Transformer uses $d_{\text{model}} = 128$, four heads and three pre-layer-norm encoder layers. The training loop is device-agnostic and selects a GPU automatically when available, otherwise CPU, without code change.

Reconstruction detector. Unsupervised drift detection follows the reconstruction principle [8]: a window is projected onto a rank- k nominal subspace (principal-component reconstruction, fit on nominal windows only) and scored by its per-window mean-squared reconstruction error. This linear realisation, run on CPU, exposes the bottleneck-rank dependence (Fig. 4b) cleanly and without GPU dependence. Detection quality is the ROC-AUC of this score against the drift labels, with the rank swept from 1 to 32 over eight randomised splits.

Evaluation. Forecasting is scored by MAE and RMSE; drift detection and anomaly ranking by F1 at the default threshold and by threshold-free ROC-AUC. We report cross-domain generalisation on three datasets from a standard anomaly-detection benchmark [16] — periodic cloud-utilisation telemetry, a machine-temperature failure series and an aperiodic demand series — chosen as analogues for periodic calibration-like, failure-bearing and irregular regimes.

Reproducibility and compute. The analyses run entirely on a single CPU and regenerate in seconds. Figures 1, 2, 4 and Table 1 are computed live from the telemetry generator; Fig. 3 and Tables 2–3 reproduce the metrics recorded by the executed sequence-model notebooks (for which the training loop is device-agnostic and runs identically on CPU or GPU). Reported uncertainties are mean $\pm$ standard deviation across seeds or randomised splits, as stated.

Data availability

The synthetic multi-qubit telemetry used in this study is generated deterministically by the released code from fixed seeds and requires no external download. The real-world time-series used for cross-domain evaluation are openly available as part of a public anomaly-detection benchmark [16]. The exact metric values underlying all figures and tables are reported in the paper and reproducible from the released code.

Code availability

The telemetry generator, model implementations, training and evaluation code, executed notebooks, and the figure-and-statistics pipeline are openly available in the project repository under an MIT licence. All figures, tables and reported confidence intervals regenerate from the released code on commodity CPU hardware; the accelerated training pipeline runs identically on GPU.

Author contributions

M.H. conceived the study, designed and implemented the models, benchmark and analysis pipeline, produced the figures, and wrote the manuscript.

Competing interests

The author declares no competing interests.

Reporting summary

Further information on research design, random seeds and the full hyperparameter configuration is available in the Methods and the released code.

Acknowledgements

The author thanks the open-source scientific-Python and PyTorch communities.

References

- [1] Philip Krantz, Morten Kjaergaard, Fei Yan, Terry P. Orlando, Simon Gustavsson, and William D. Oliver. A quantum engineer’s guide to superconducting qubits. *Applied Physics Reviews*, 6(2):021318, 2019. doi: 10.1063/1.5089550.
- [2] Morten Kjaergaard, Mollie E. Schwartz, Jochen Braumüller, Philip Krantz, Joel I.-J. Wang, Simon Gustavsson, and William D. Oliver. Superconducting qubits: Current state of play. *Annual Review of Condensed Matter Physics*, 11:369–395, 2020. doi: 10.1146/annurev-conmatphys-031119-050605.
- [3] John Preskill. Quantum computing in the NISQ era and beyond. *Quantum*, 2:79, 2018. doi: 10.22331/q-2018-08-06-79.
- [4] Google Quantum AI. Suppressing quantum errors by scaling a surface code logical qubit. *Nature*, 614(7949):676–681, 2023. doi: 10.1038/s41586-022-05434-1.
- [5] Frank Arute et al. Quantum supremacy using a programmable superconducting processor. *Nature*, 574(7779):505–510, 2019. doi: 10.1038/s41586-019-1666-5.
- [6] Bryan Lim and Stefan Zohren. Time-series forecasting with deep learning: a survey. *Philosophical Transactions of the Royal Society A*, 379(2194):20200209, 2021. doi: 10.1098/rsta.2020.0209.
- [7] Qingsong Wen, Tian Zhou, Chaoli Zhang, Weiqi Chen, Ziqing Ma, Junchi Yan, and Liang Sun. Transformers in time series: a survey. In *Proc. Int. Joint Conf. on Artificial Intelligence (IJCAI)*, pages 6778–6786, 2023.
- [8] Pankaj Malhotra, Anusha Ramakrishnan, Gaurangi Anand, Lovekesh Vig, Puneet Agarwal, and Gautam Shroff. LSTM-based encoder–decoder for multi-sensor anomaly detection. *arXiv preprint arXiv:1607.00148*, 2016.

- [9] Yarin Gal and Zoubin Ghahramani. Dropout as a Bayesian approximation: representing model uncertainty in deep learning. *Proc. Int. Conf. on Machine Learning (ICML)*, pages 1050–1059, 2016.
- [10] Sepp Hochreiter and Jürgen Schmidhuber. Long short-term memory. *Neural Computation*, 9(8):1735–1780, 1997. doi: 10.1162/neco.1997.9.8.1735.
- [11] Kyunghyun Cho, Bart van Merriënboer, Caglar Gulcehre, Dzmitry Bahdanau, Fethi Bougares, Holger Schwenk, and Yoshua Bengio. Learning phrase representations using RNN encoder–decoder for statistical machine translation. In *Proc. Conf. Empirical Methods in Natural Language Processing (EMNLP)*, pages 1724–1734, 2014.
- [12] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need. In *Advances in Neural Information Processing Systems (NeurIPS)*, volume 30, 2017.
- [13] Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. In *Int. Conf. on Learning Representations (ICLR)*, 2019.
- [14] Ilya Loshchilov and Frank Hutter. SGDR: stochastic gradient descent with warm restarts. In *Int. Conf. on Learning Representations (ICLR)*, 2017.
- [15] Adam Paszke et al. PyTorch: an imperative style, high-performance deep learning library. In *Advances in Neural Information Processing Systems (NeurIPS)*, volume 32, 2019.
- [16] Alexander Lavin and Subutai Ahmad. Evaluating real-time anomaly detection algorithms – the Numenta anomaly benchmark. In *IEEE Int. Conf. on Machine Learning and Applications (ICMLA)*, pages 38–44, 2015. doi: 10.1109/ICMLA.2015.141.