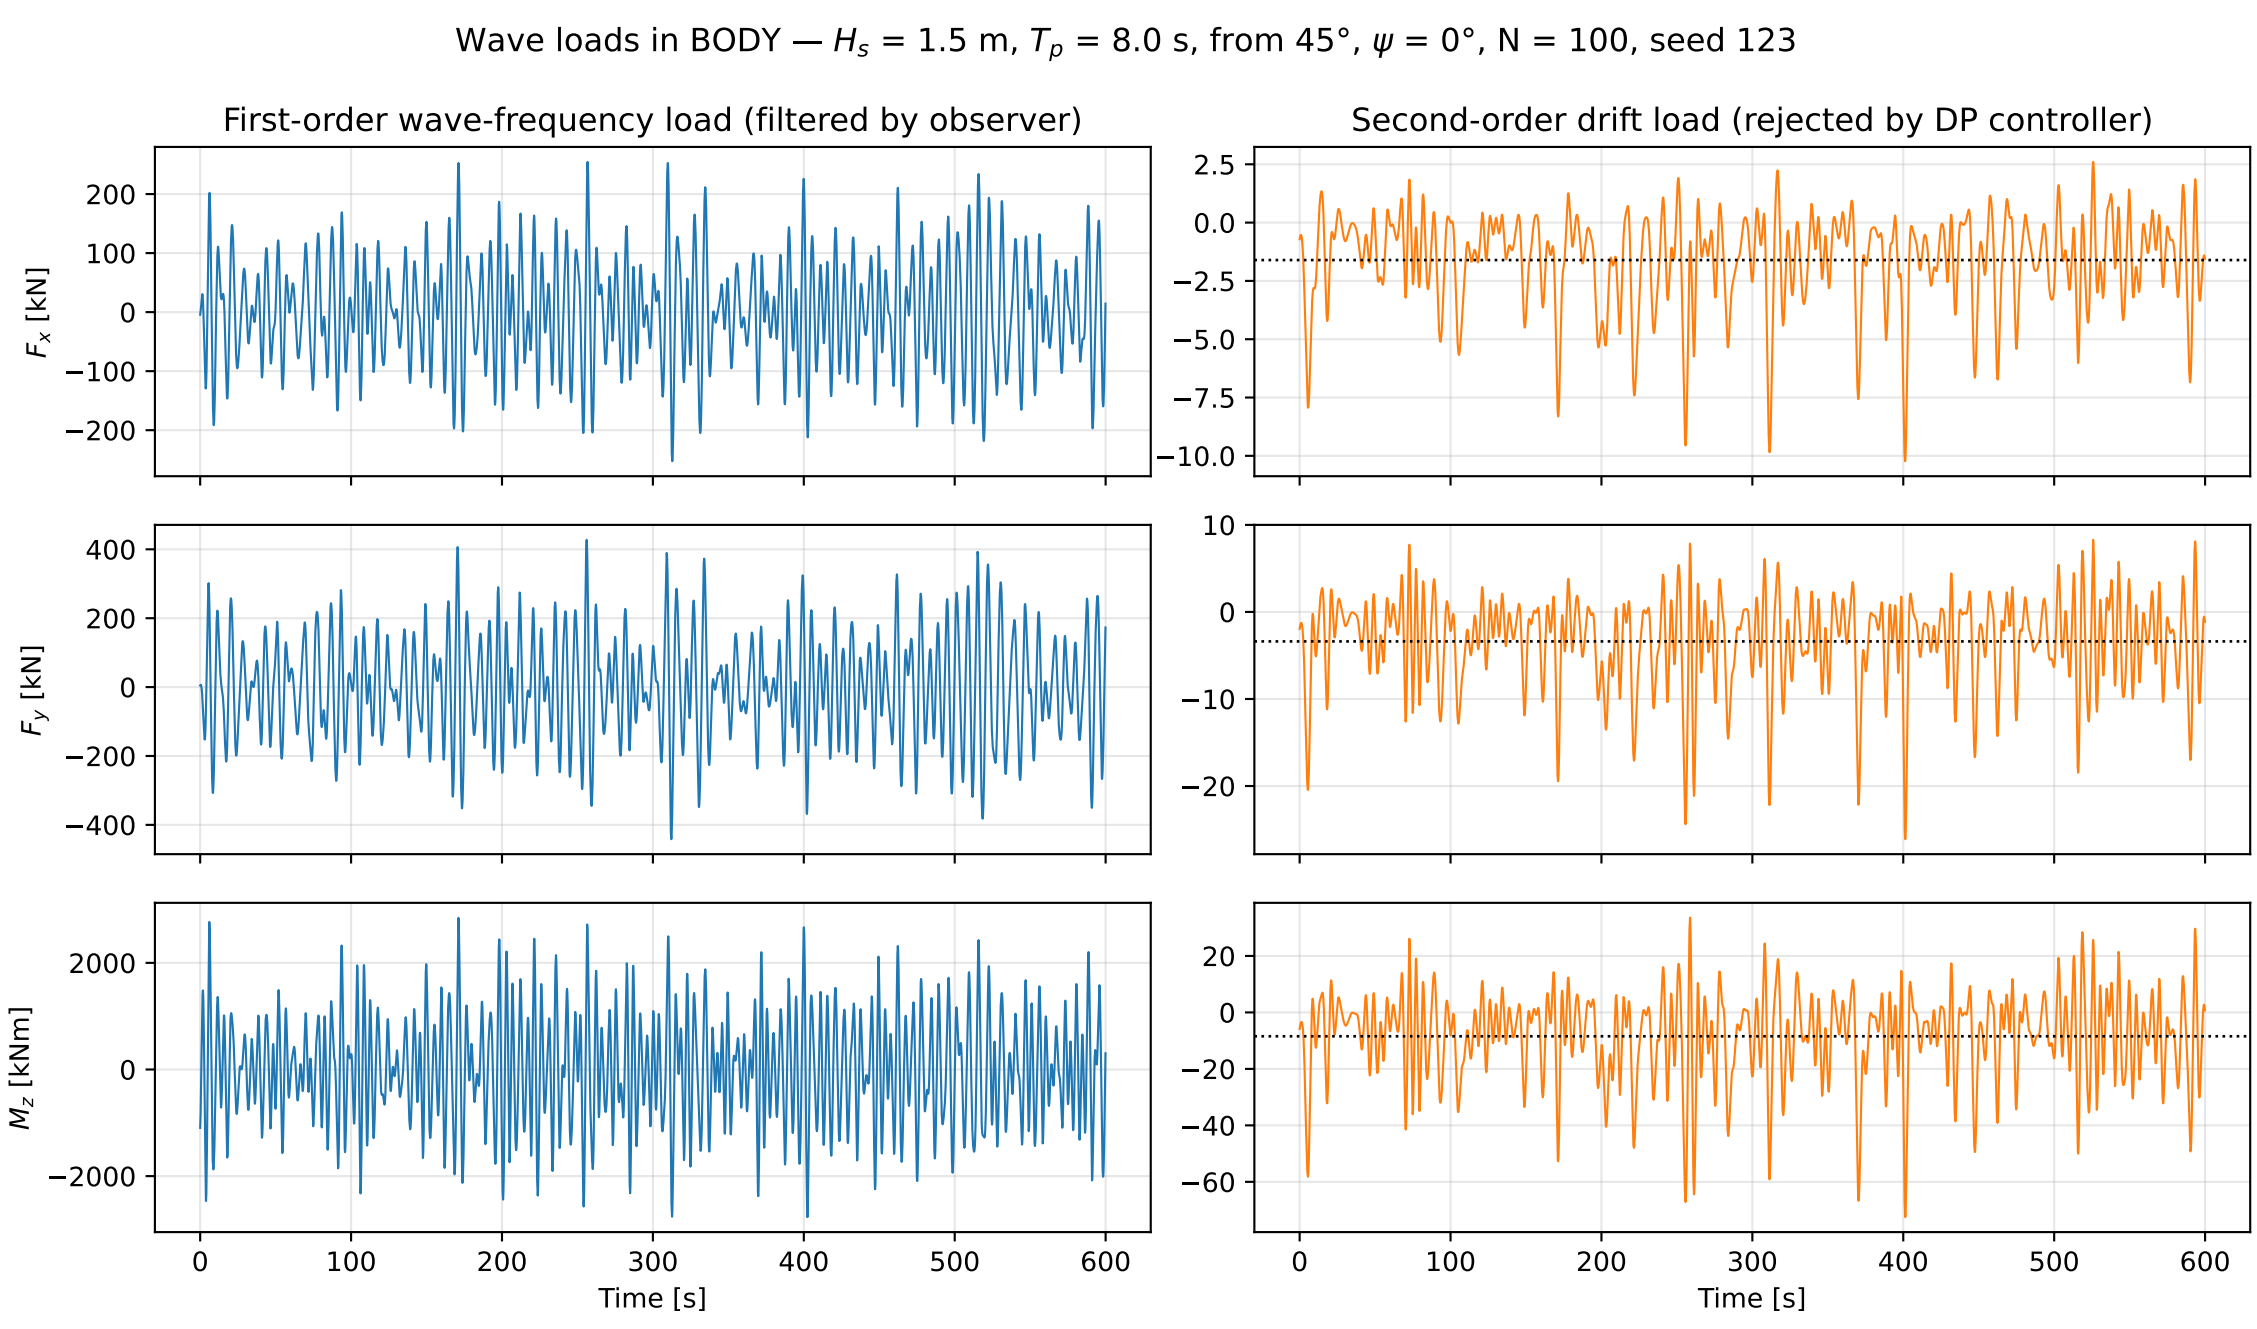

Wave loads in BODY — H_s = 1.5 m, T_p = 8.0 s, from 45°, ψ = 0°, N = 100, seed 123
First-order wave-frequency load (filtered by observer)
Second-order drift load (rejected by DP controller)
F_x [kN]
F_y [kN]
M_z [kNm]
Time [s]
Time [s]