# Fond de base maille (femme)

Taille 42 · tracé et export Seamly2D

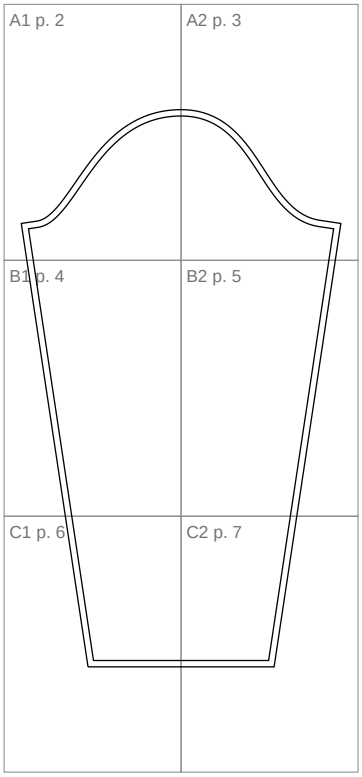
Carré 5×5

Imprimer à 100 % (« taille réelle », sans ajustement à la page). Vérifier le carré de contrôle ci-contre : 5 cm de côté. Chaque pièce a ses propres feuilles : couper chaque feuille sur le cadre gris là où elle touche une voisine, puis scotcher bord à bord selon le plan (lettre = rangée, chiffre = colonne), en prolongeant les repères en biais d'une feuille à l'autre. Tracé extérieur : ligne de coupe, coutures de 0,7 cm comprises ; tracé intérieur : ligne de couture.

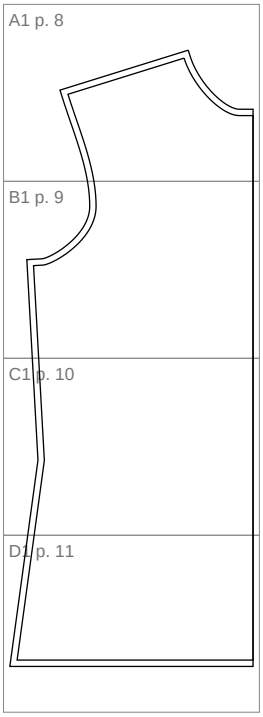
### Pièces et assemblages (14 feuilles A4)

Manche (couper 2 fois (en symétrie)) : 6 feuilles portrait, 7 raccords, pages 2 à 7
Devant (couper 1 fois au pli) : 4 feuilles paysage, 3 raccords, pages 8 à 11
Dos (couper 1 fois au pli) : 4 feuilles paysage, 3 raccords, pages 12 à 15

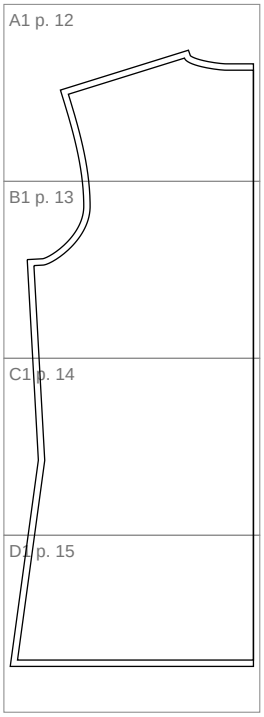
**Manche**

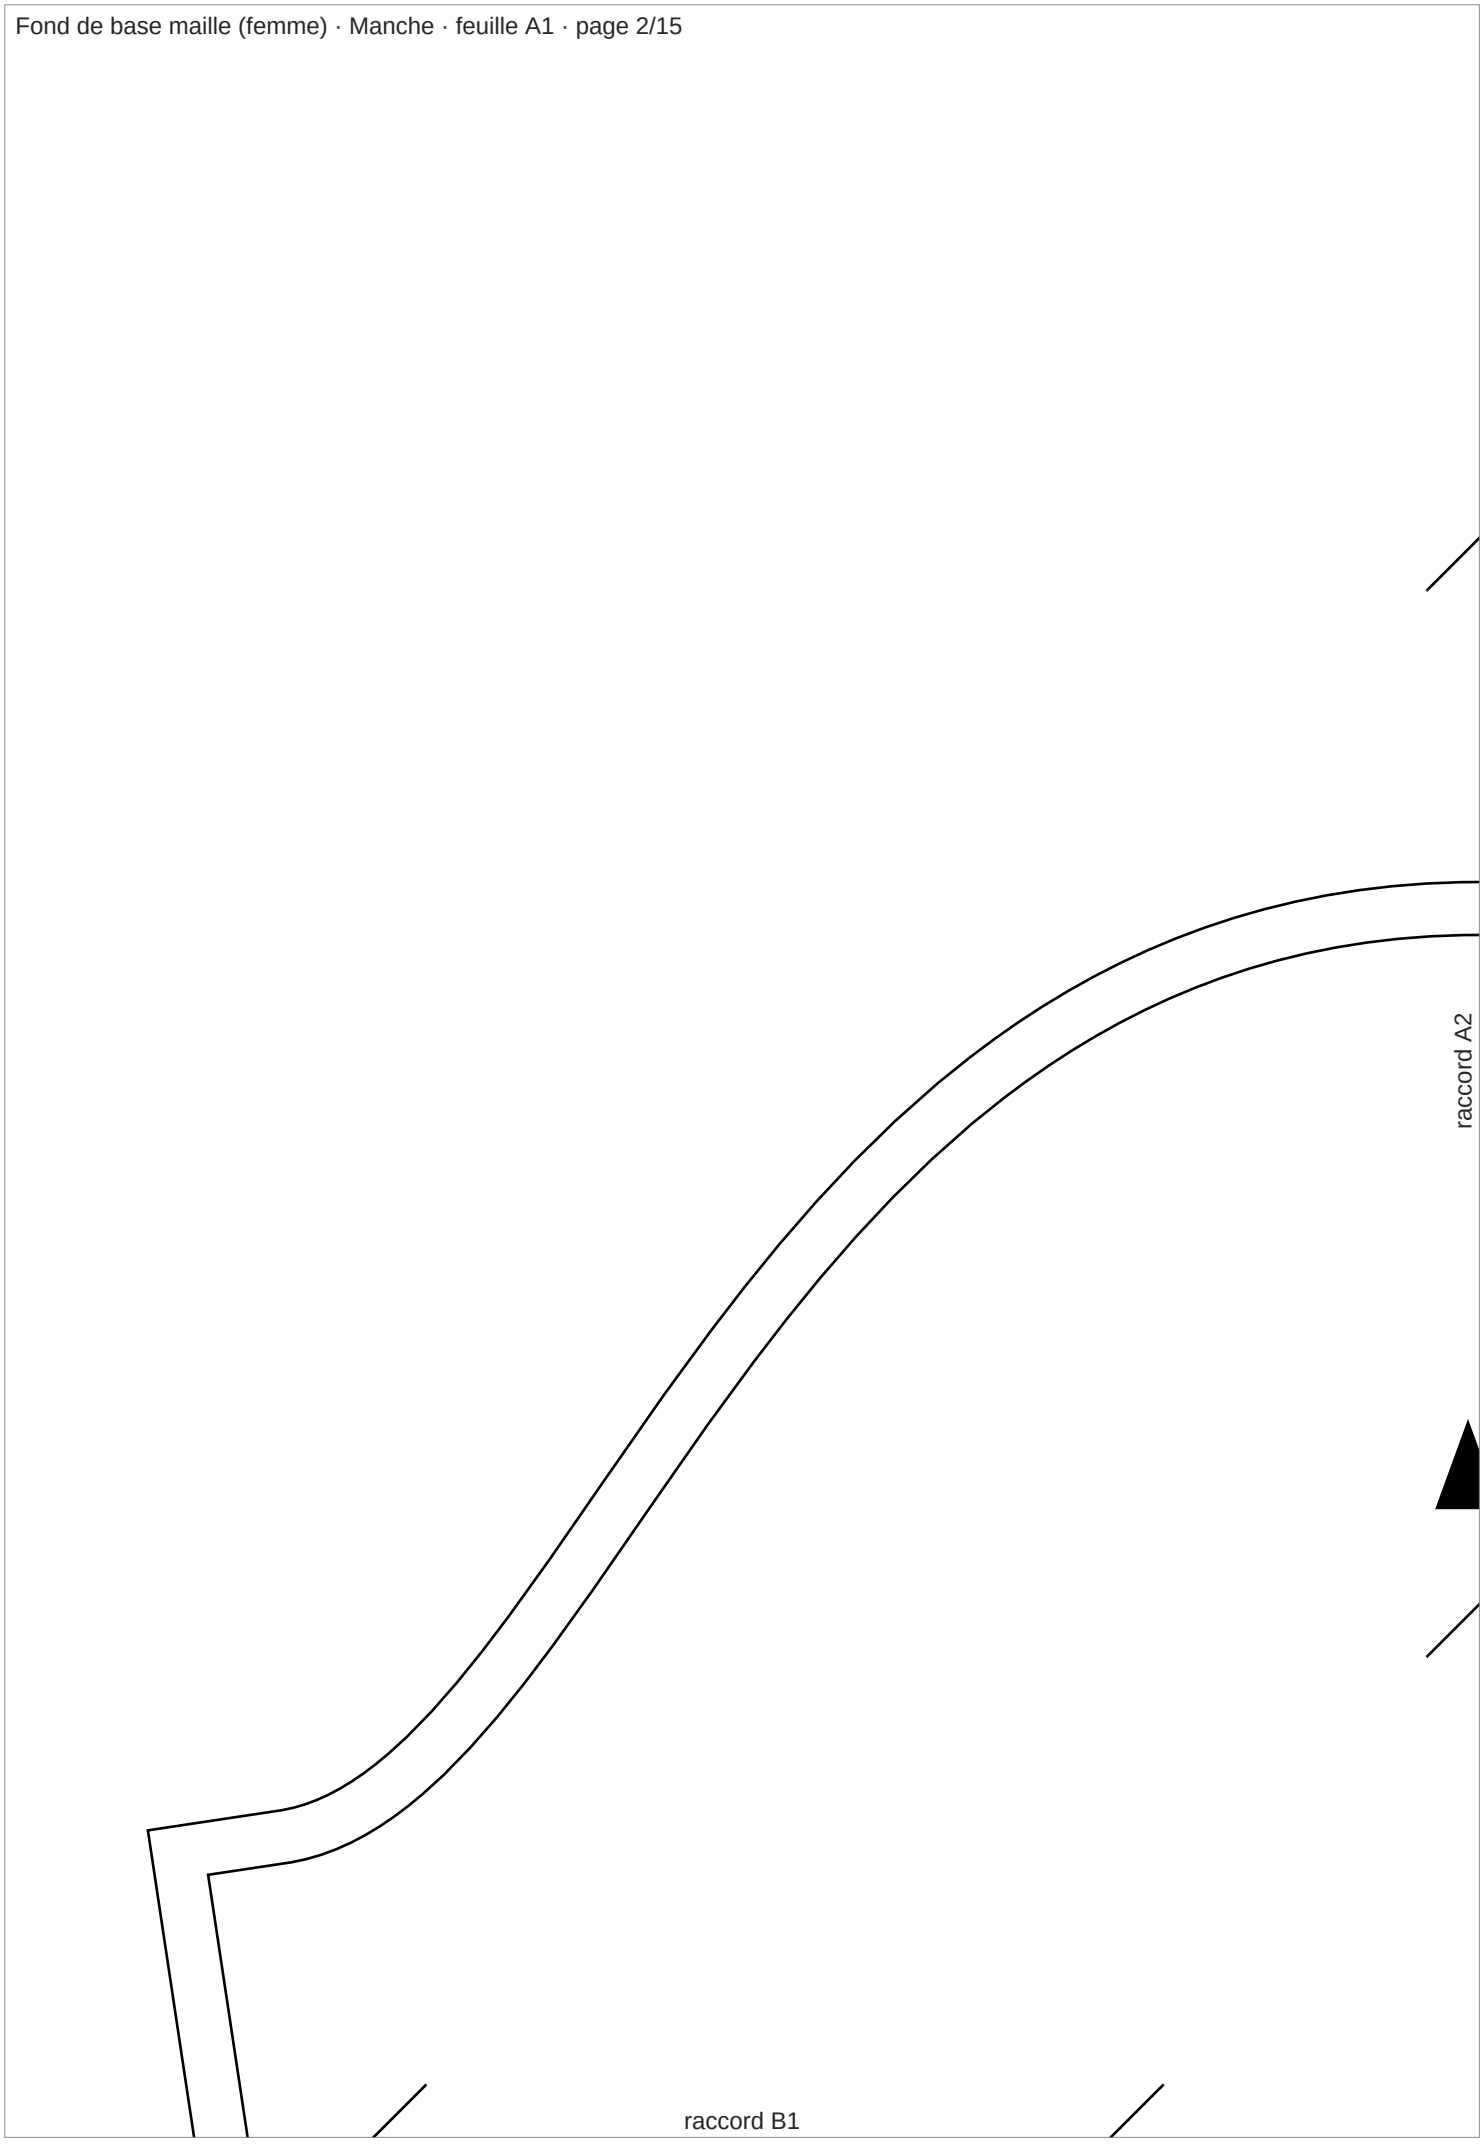


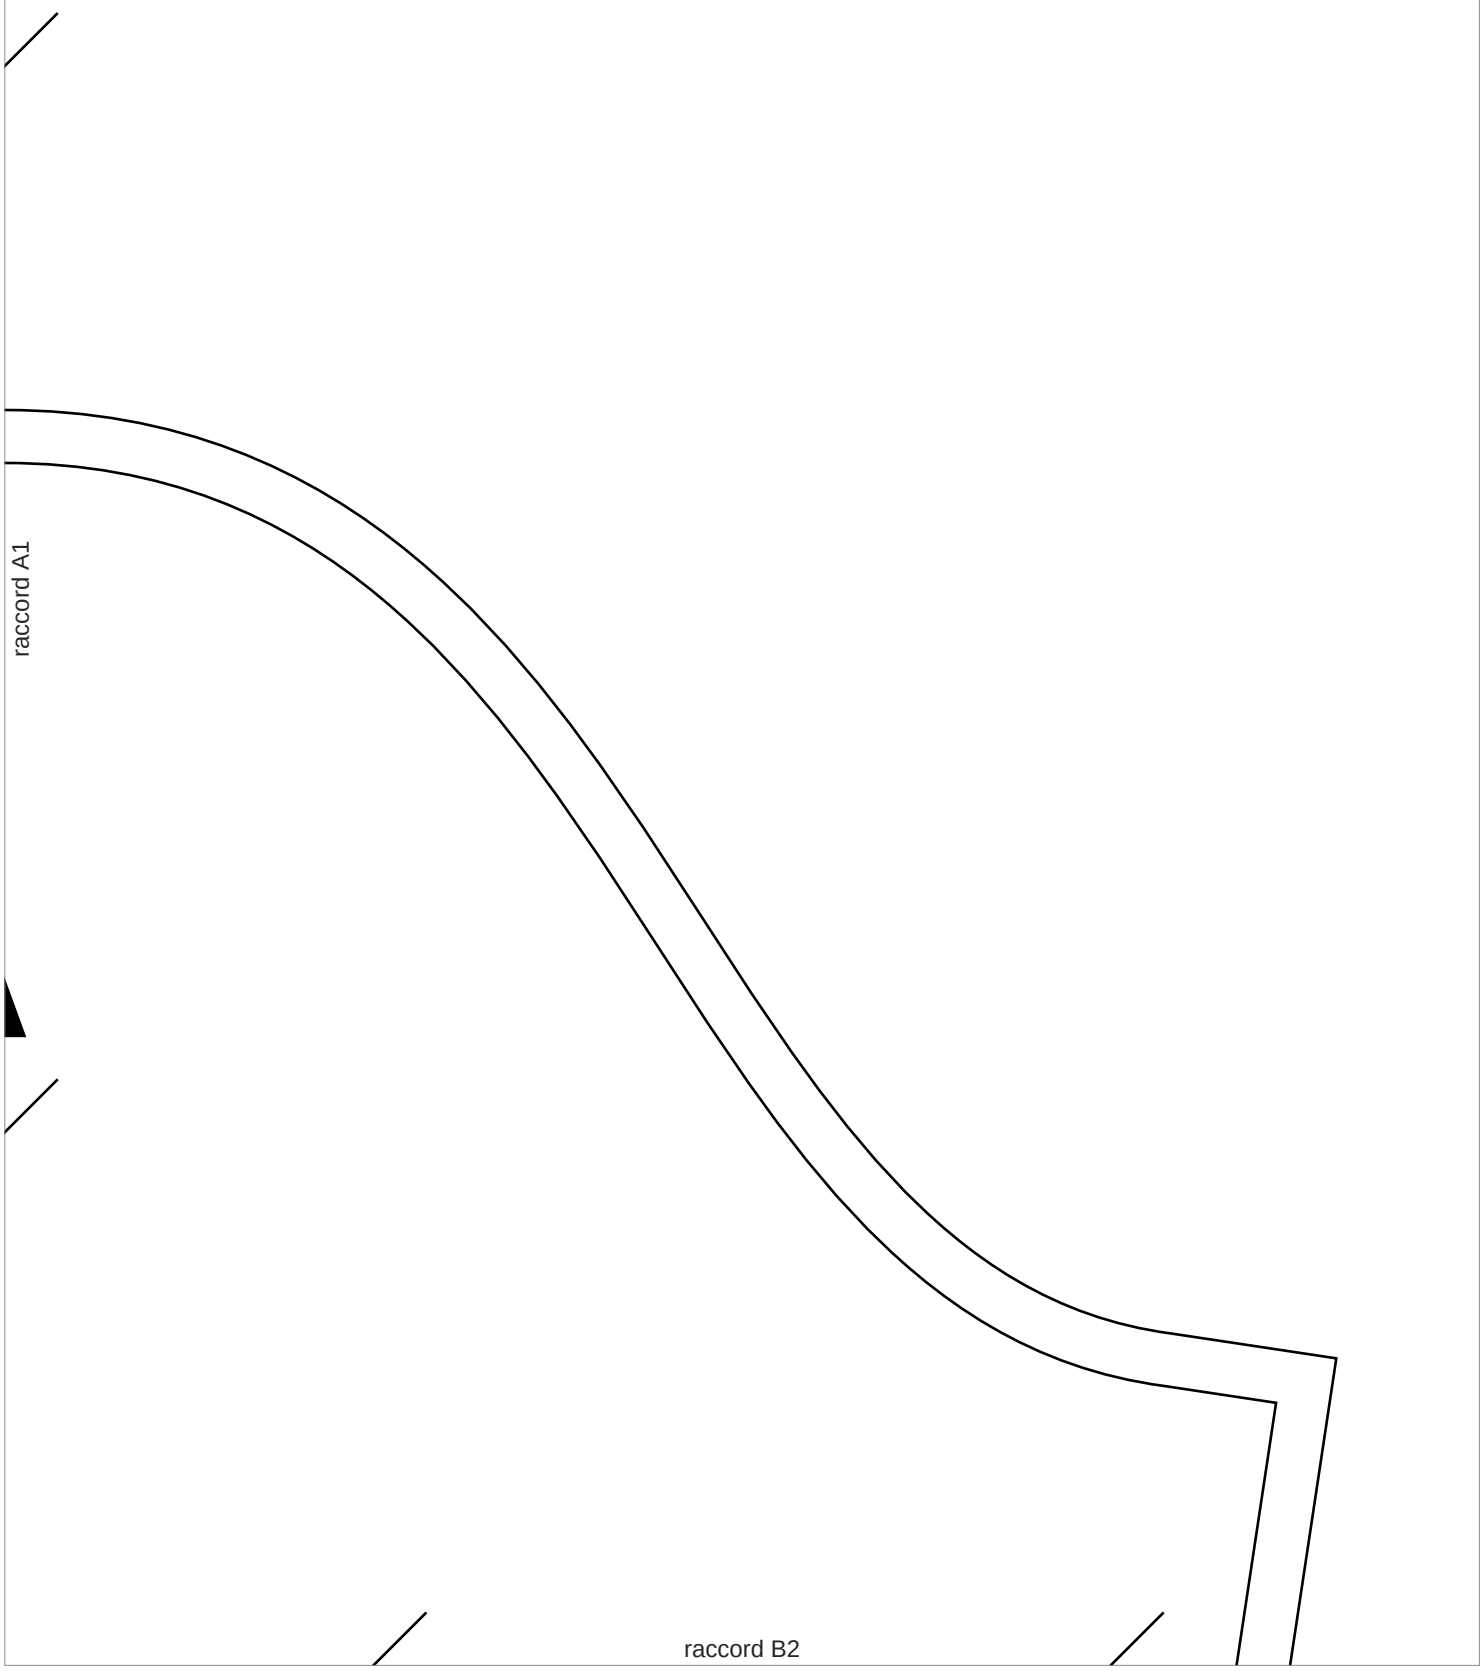

**Devant**




**Dos**




raccord A2
raccord B1


raccord A1
raccord B2

raccord A1

# FOND DE BASE MAILLE

*Base*

*T42*

Droit fil

raccord B2

raccord C1

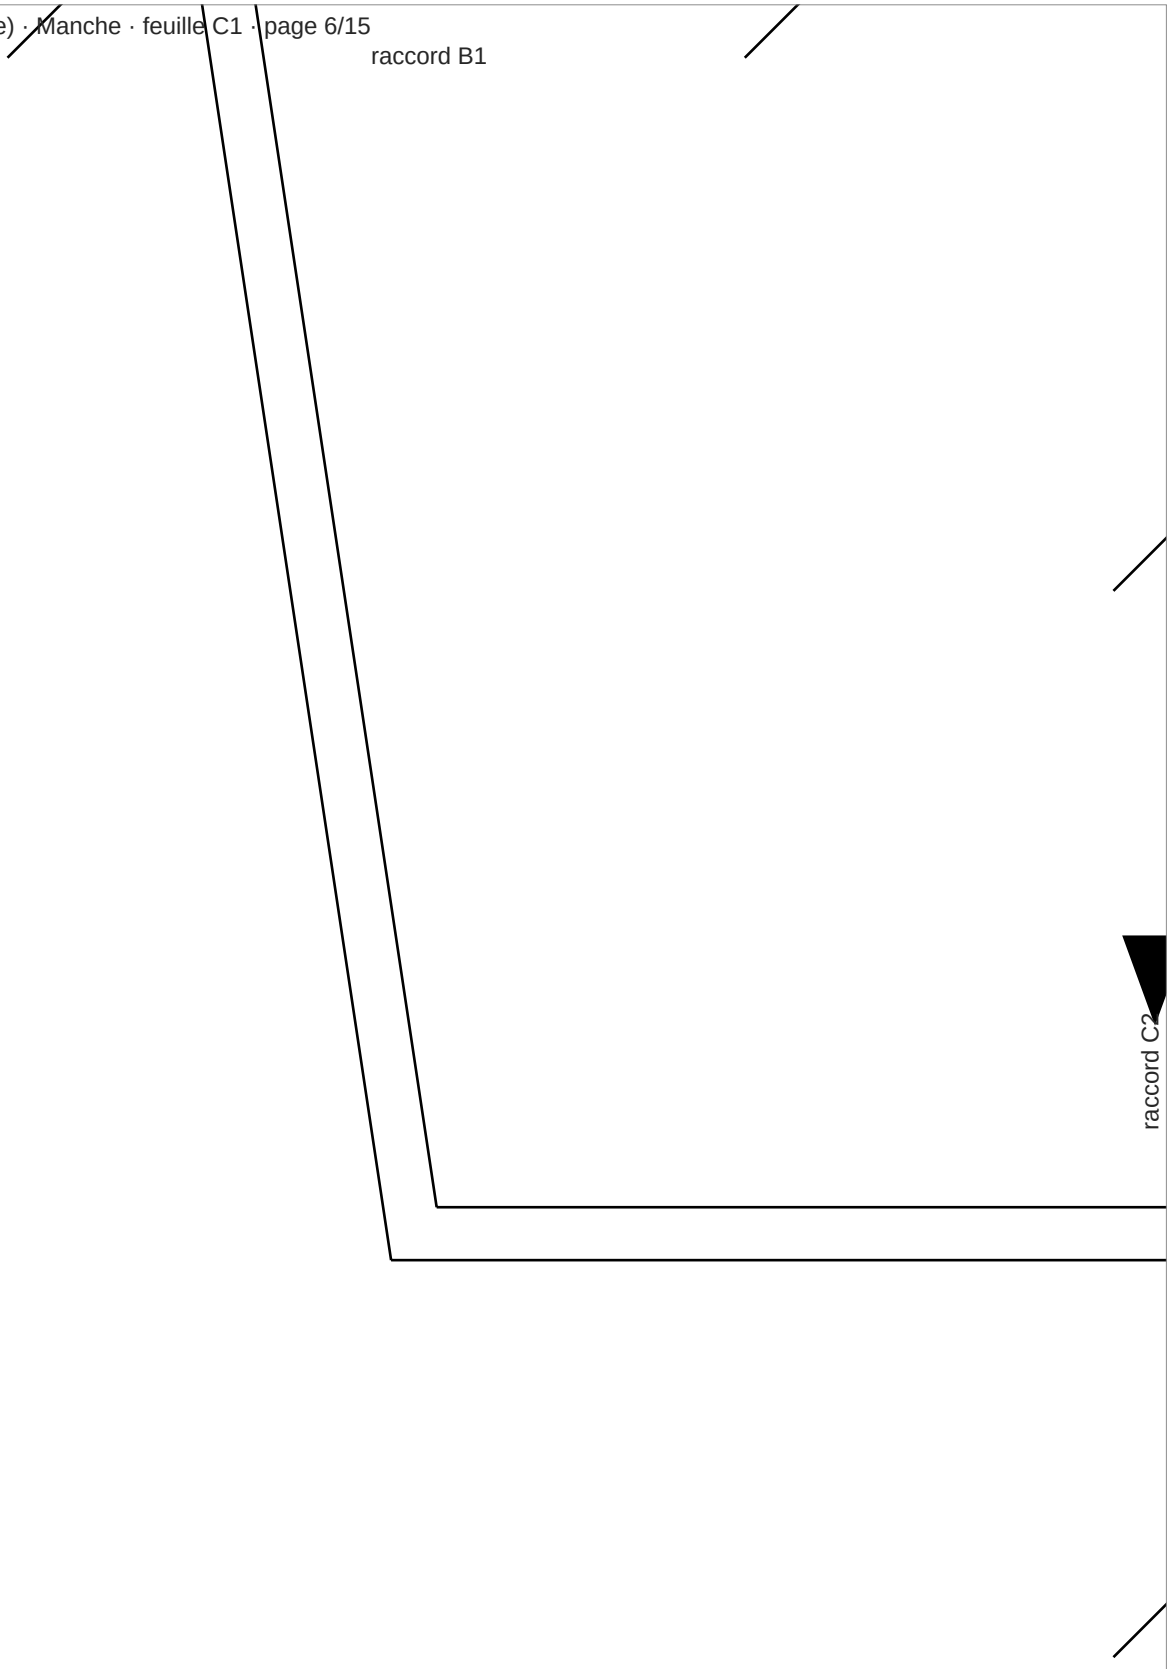
raccord A2

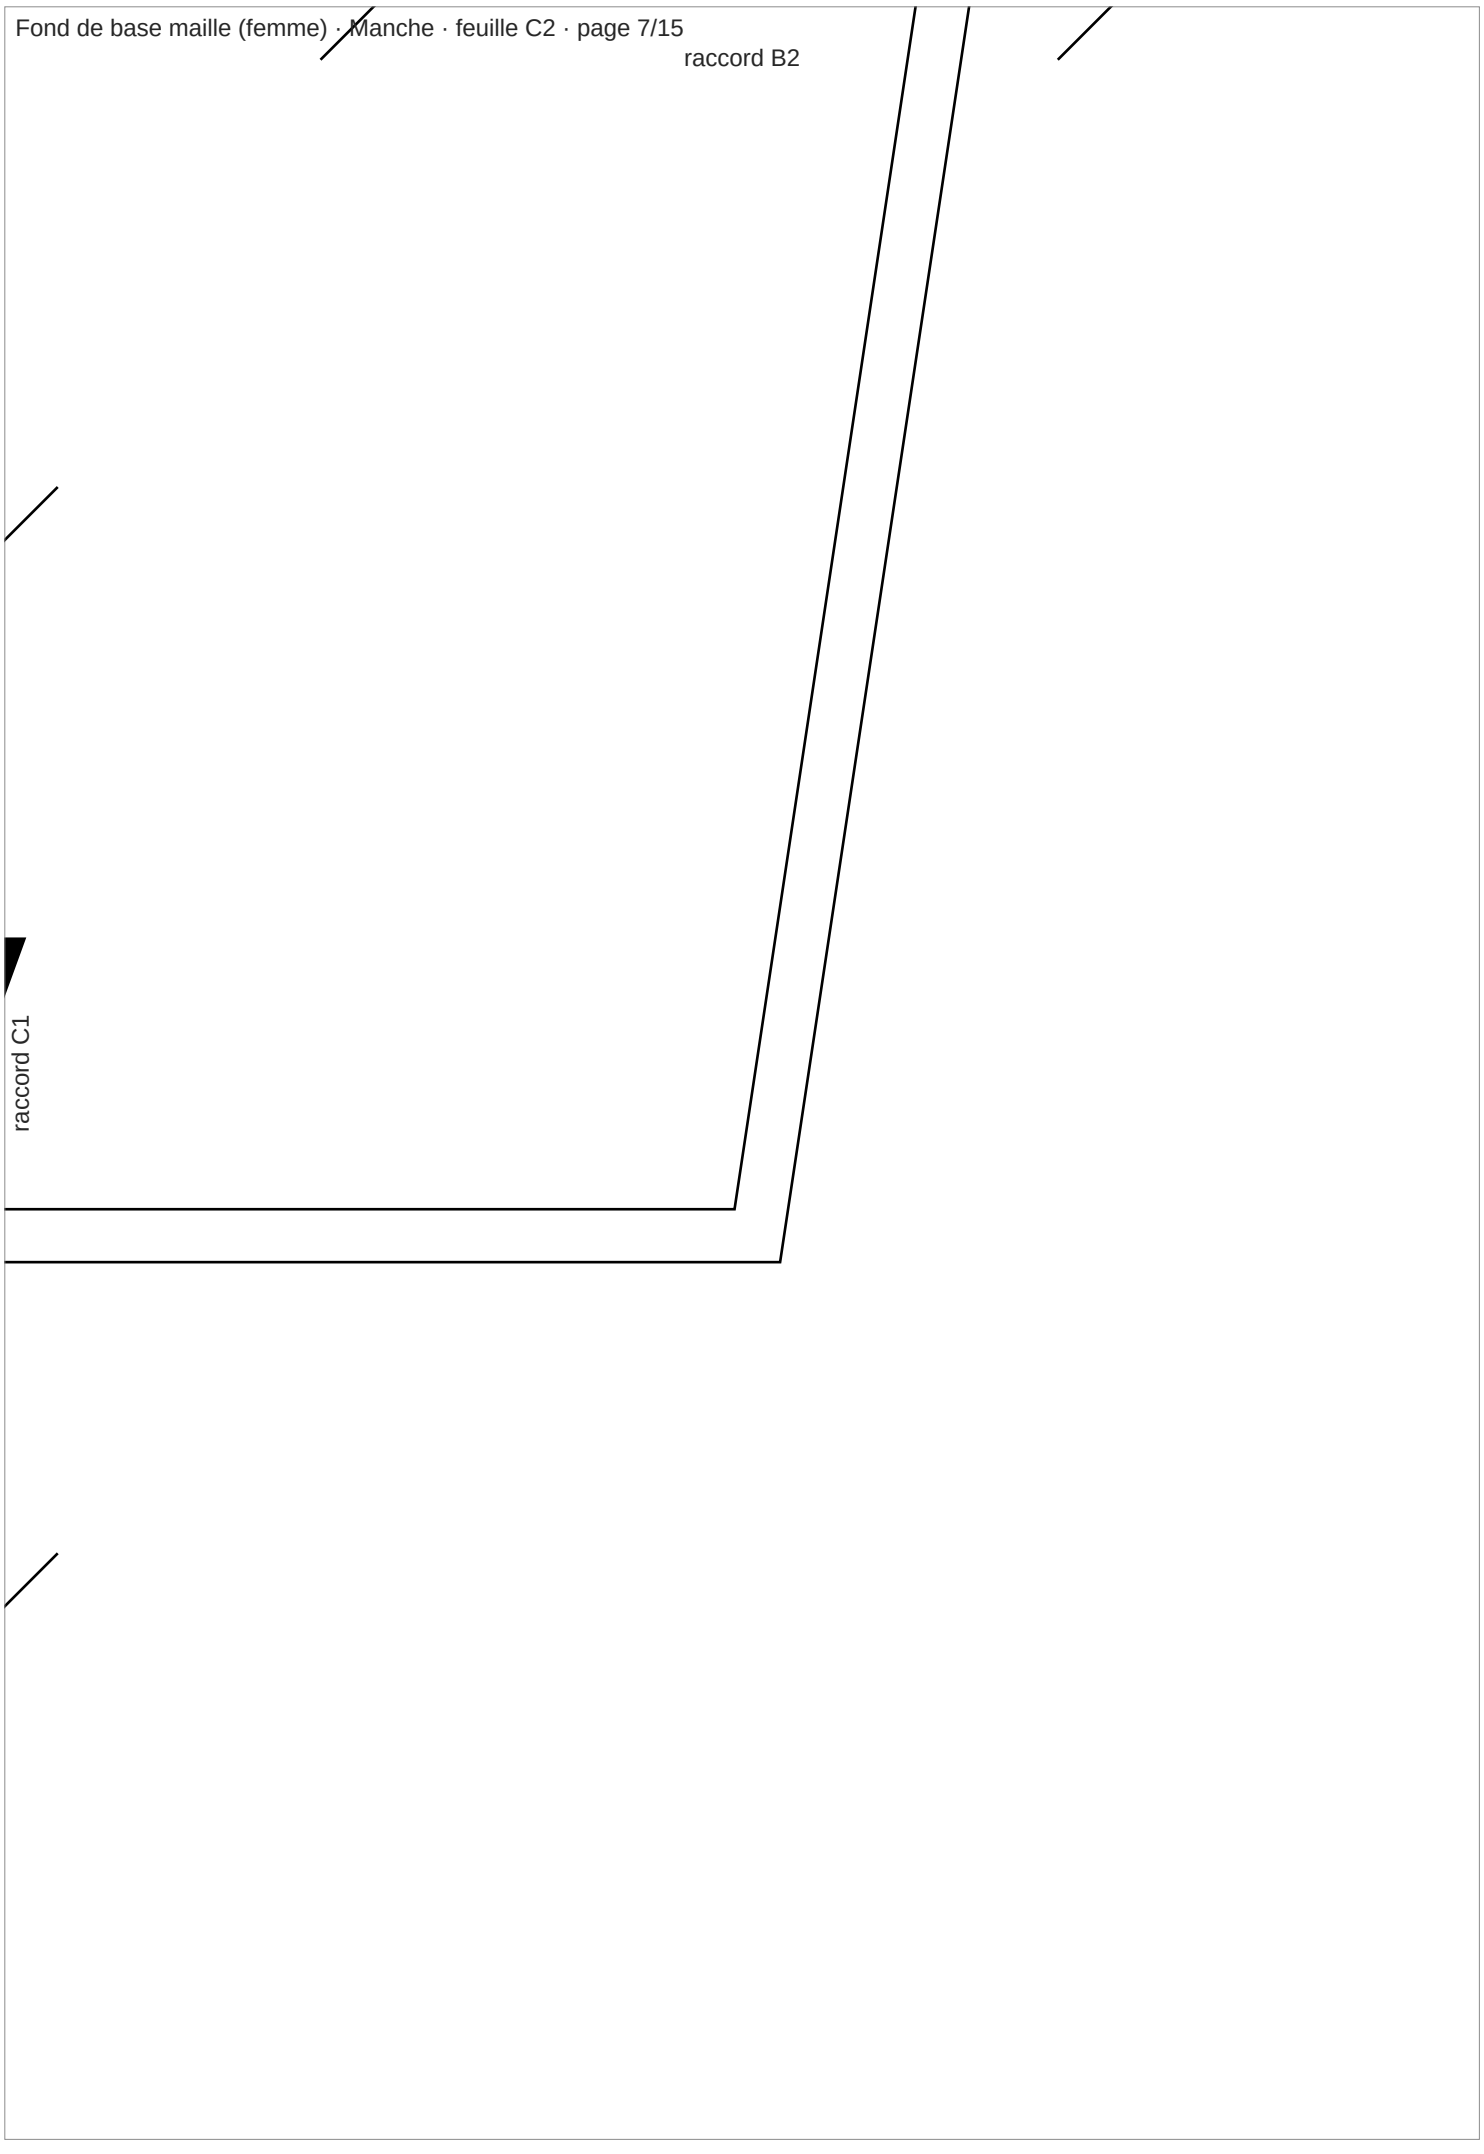
raccord B1

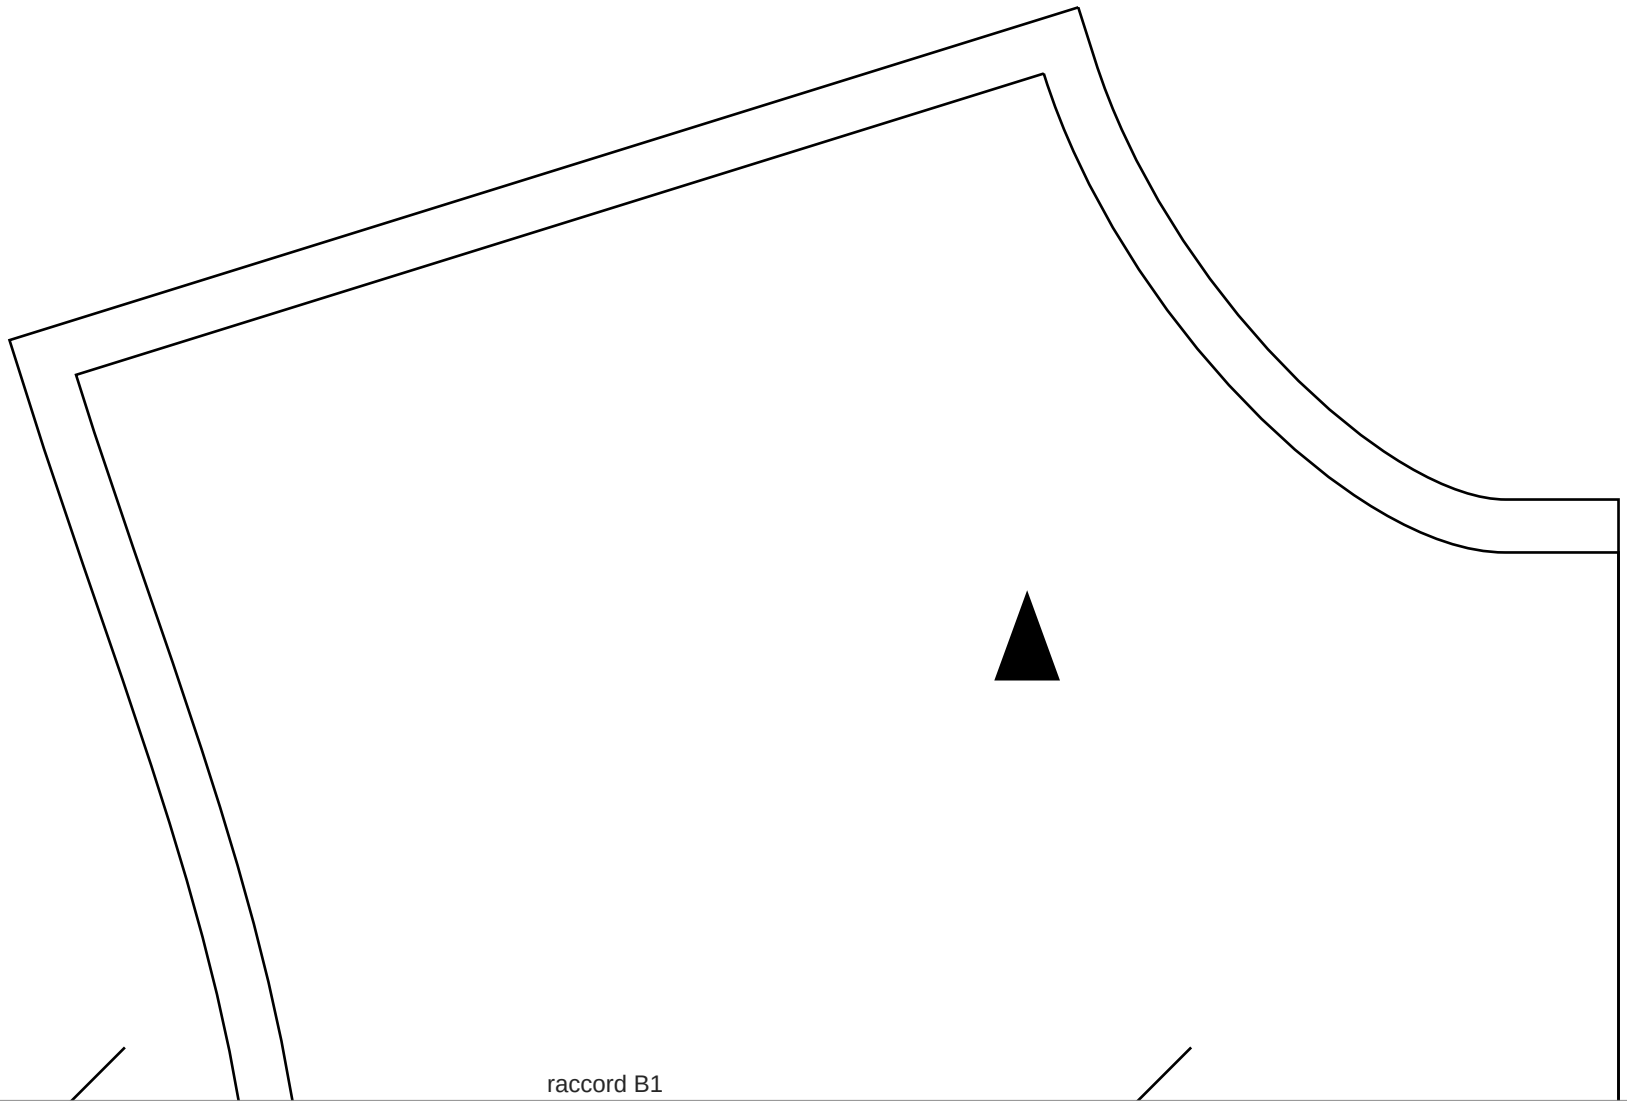
# Ma...he

*Tissu X2*

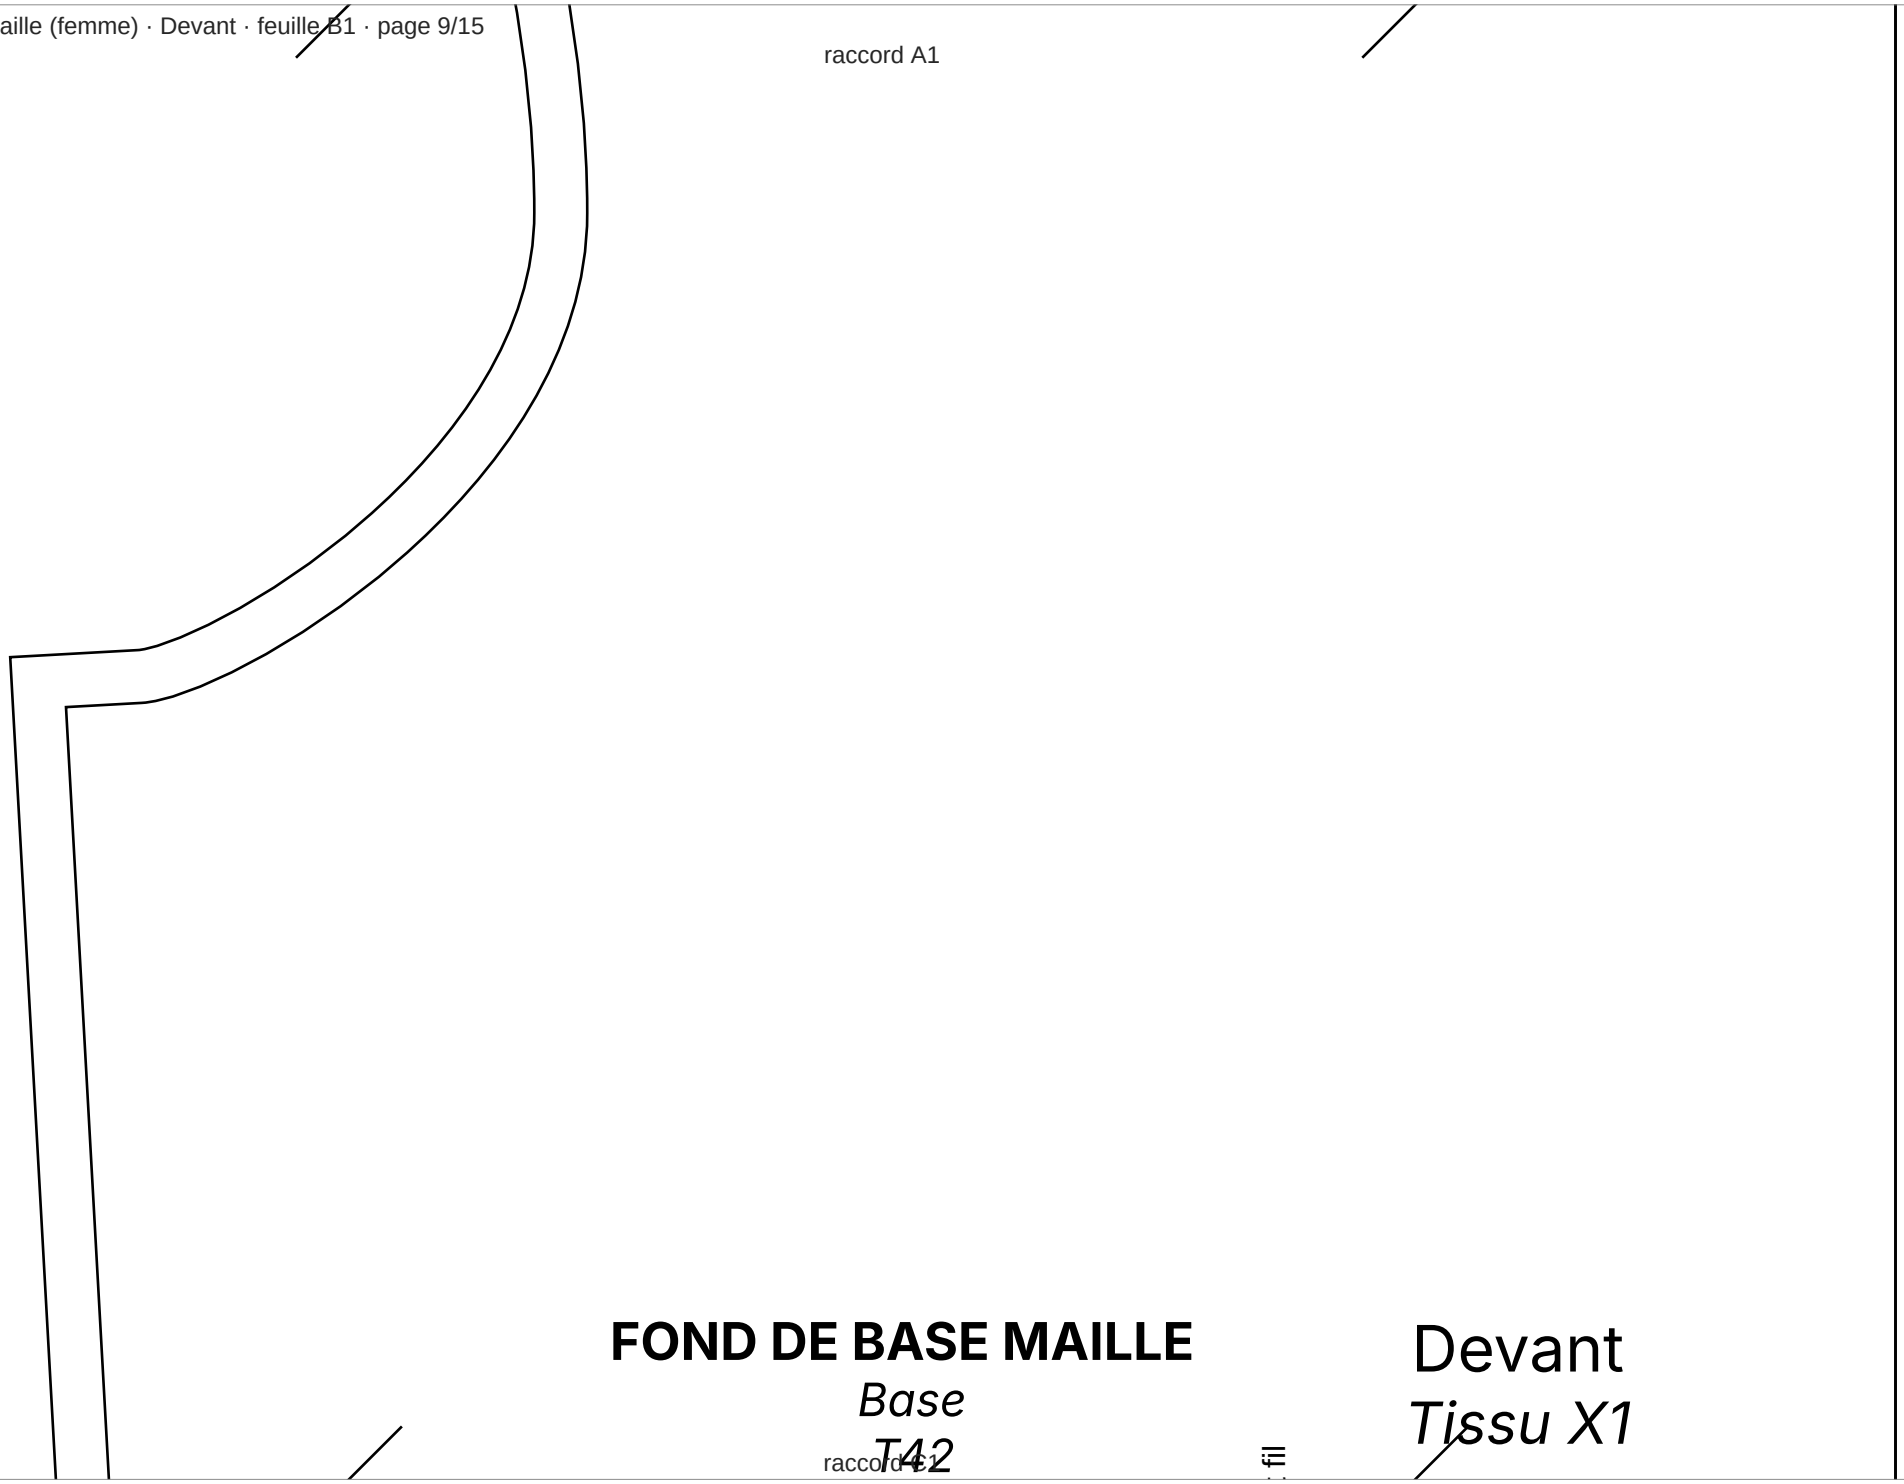
raccord C2


raccord B1
raccord C2


raccord B2
raccord C1


raccord B1

raccord A1



# FOND DE BASE MAILLE

*Base*

*T42*

raccord B1

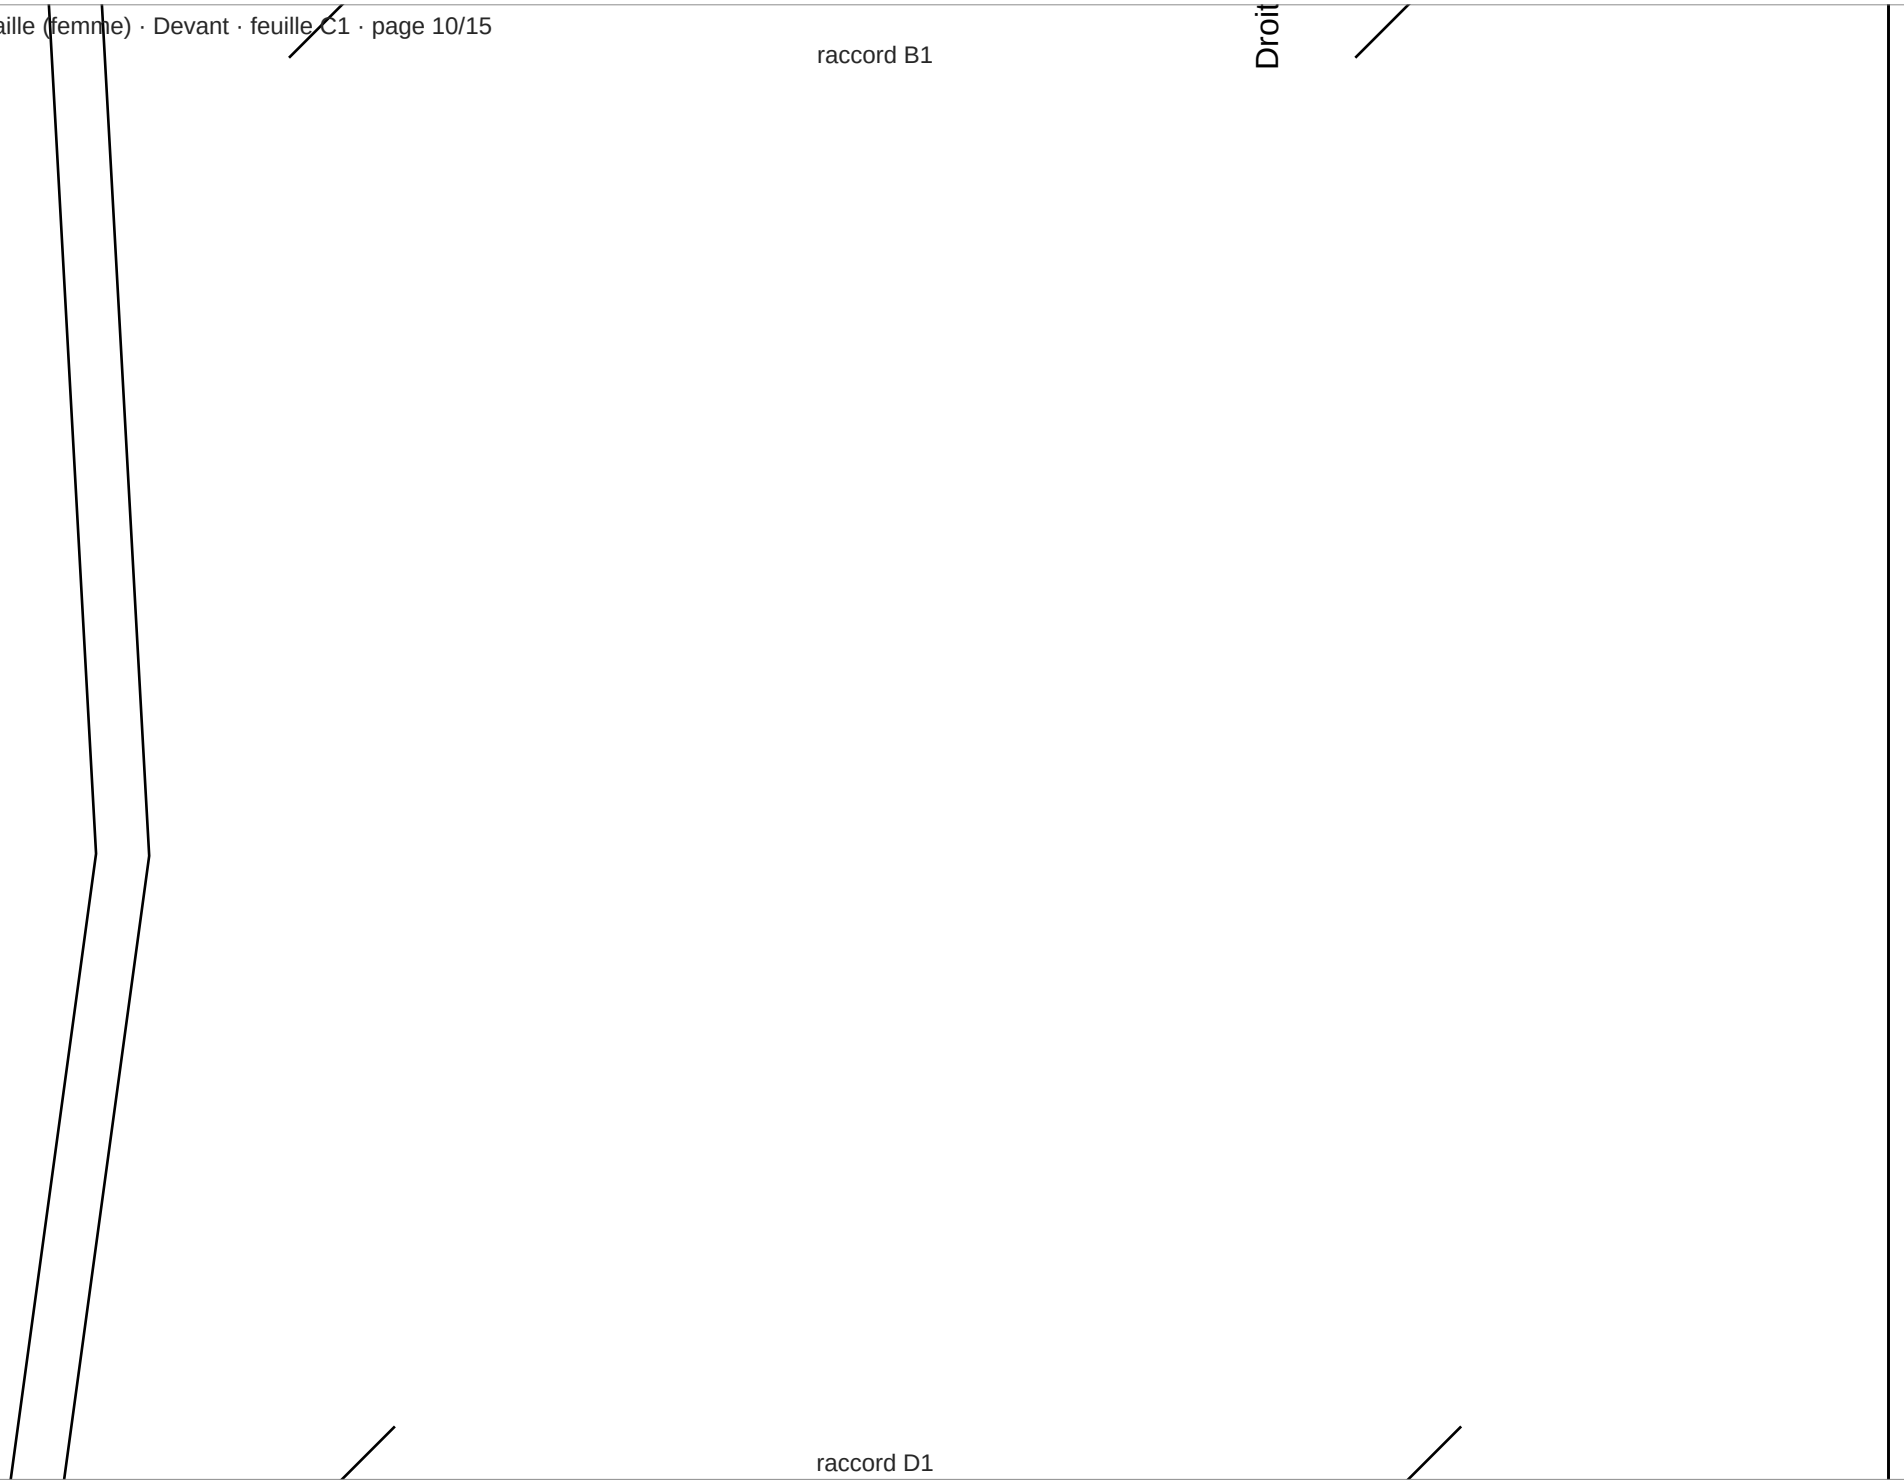
fil

Devant

*Tissu X1*

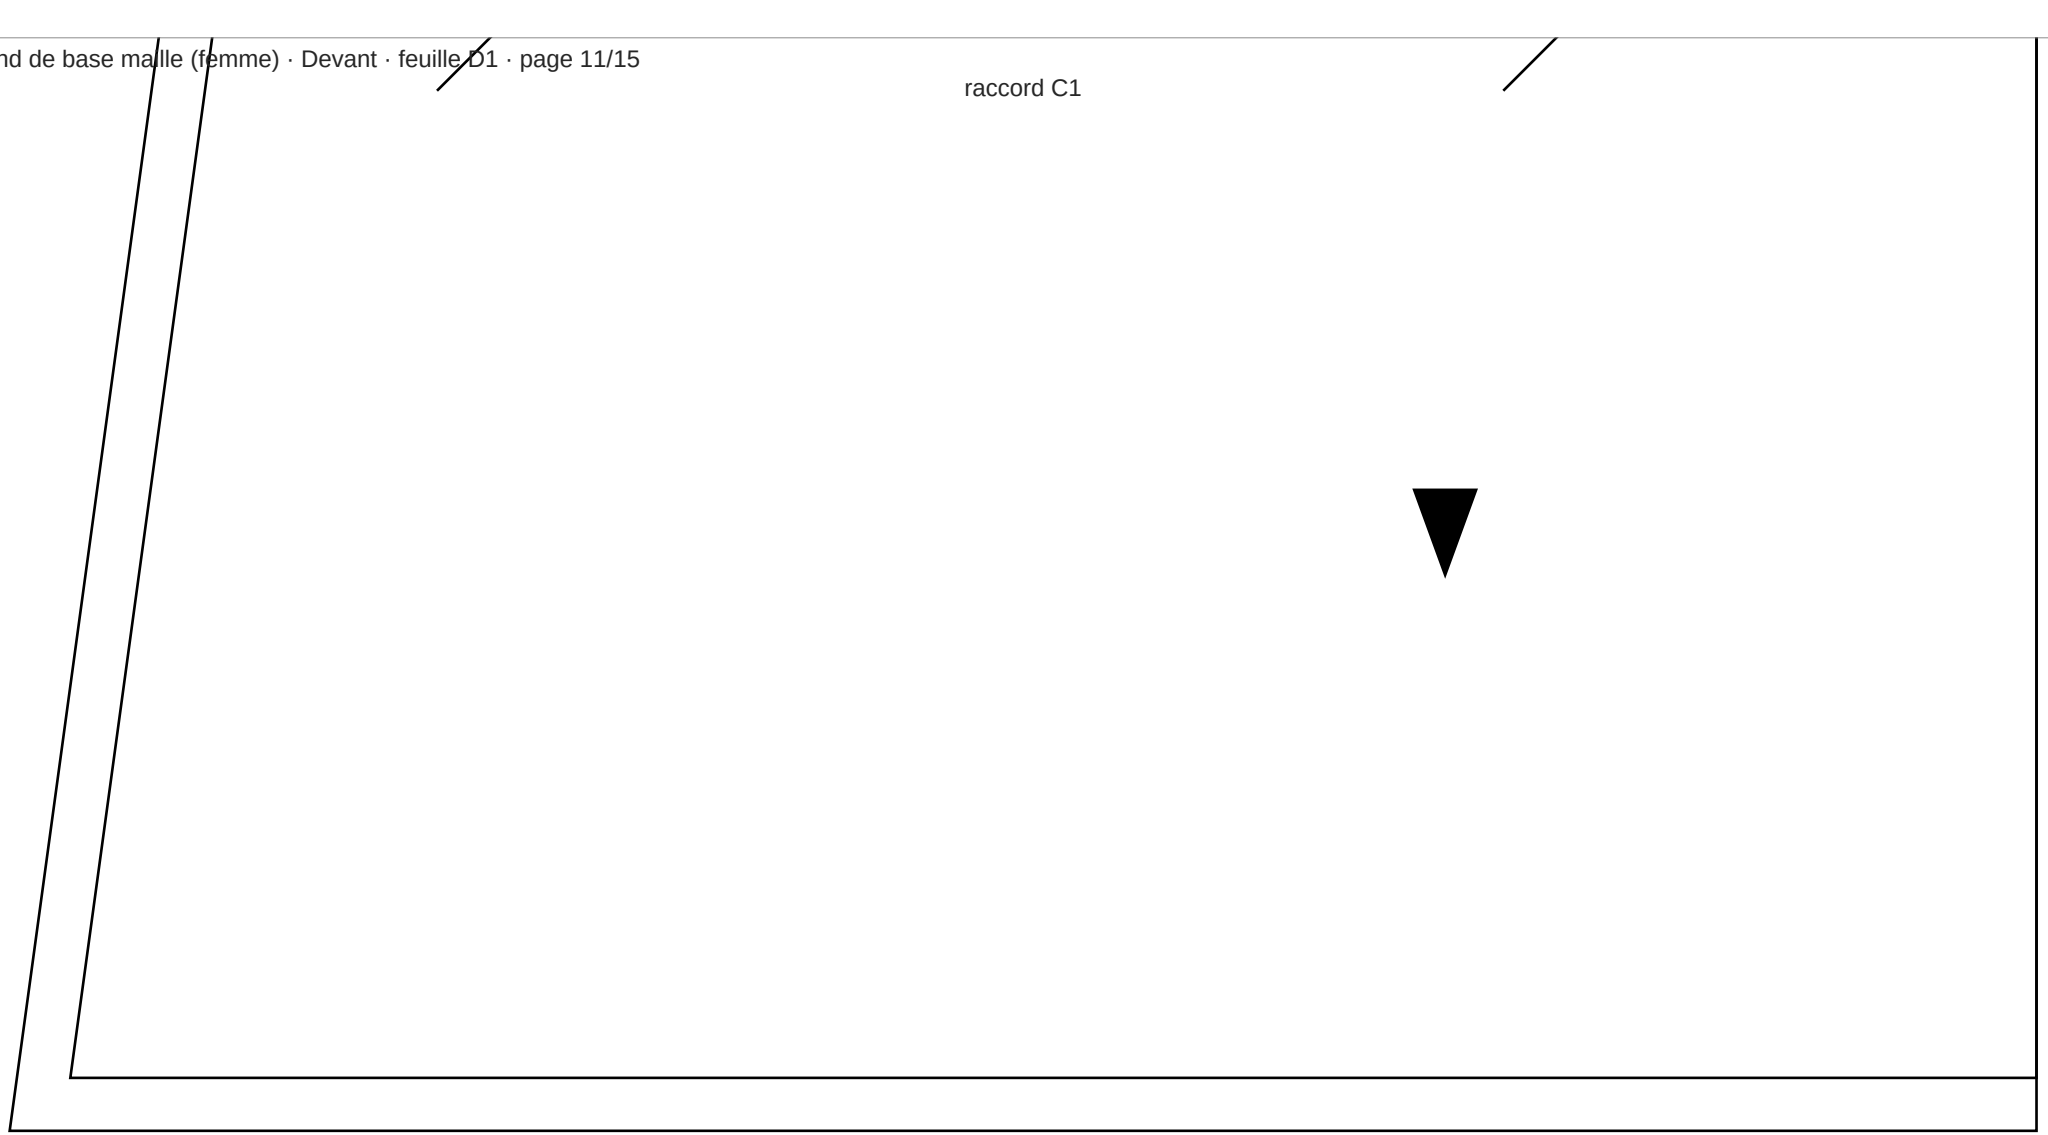
raccord B1

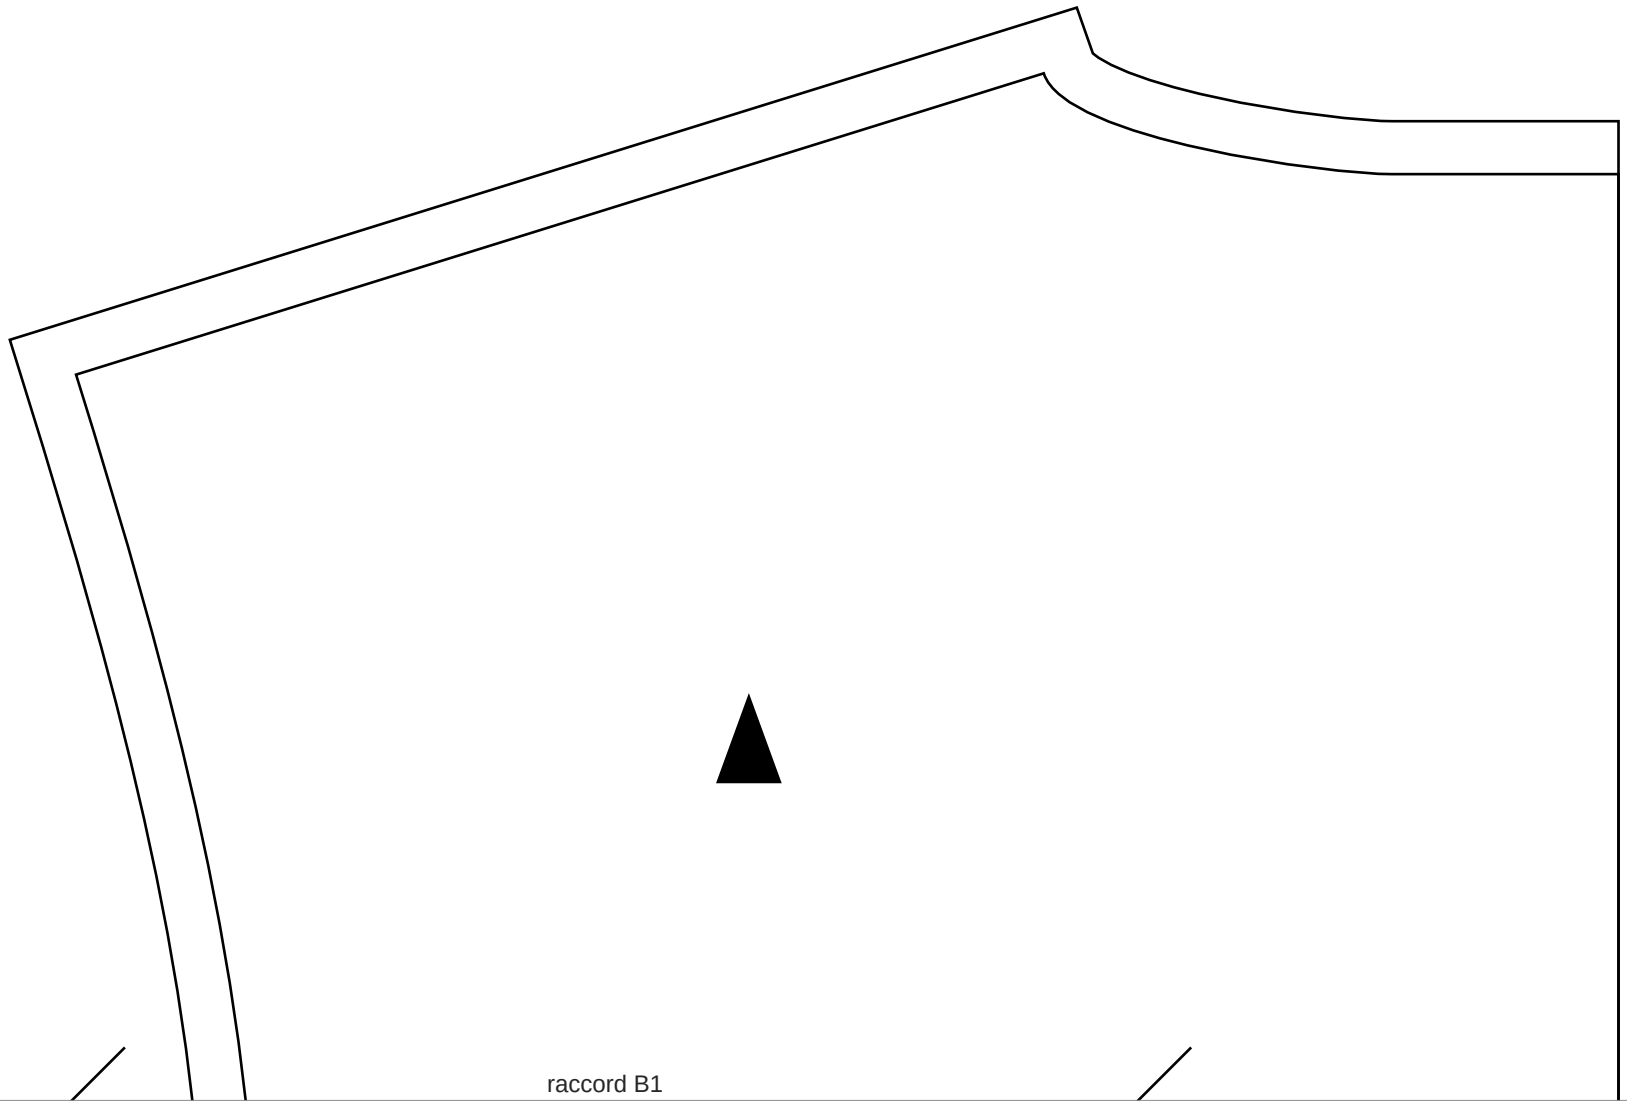
Droit



raccord D1

raccord C1




raccord B1

raccord A1

# FOND DE BASE MAILLE

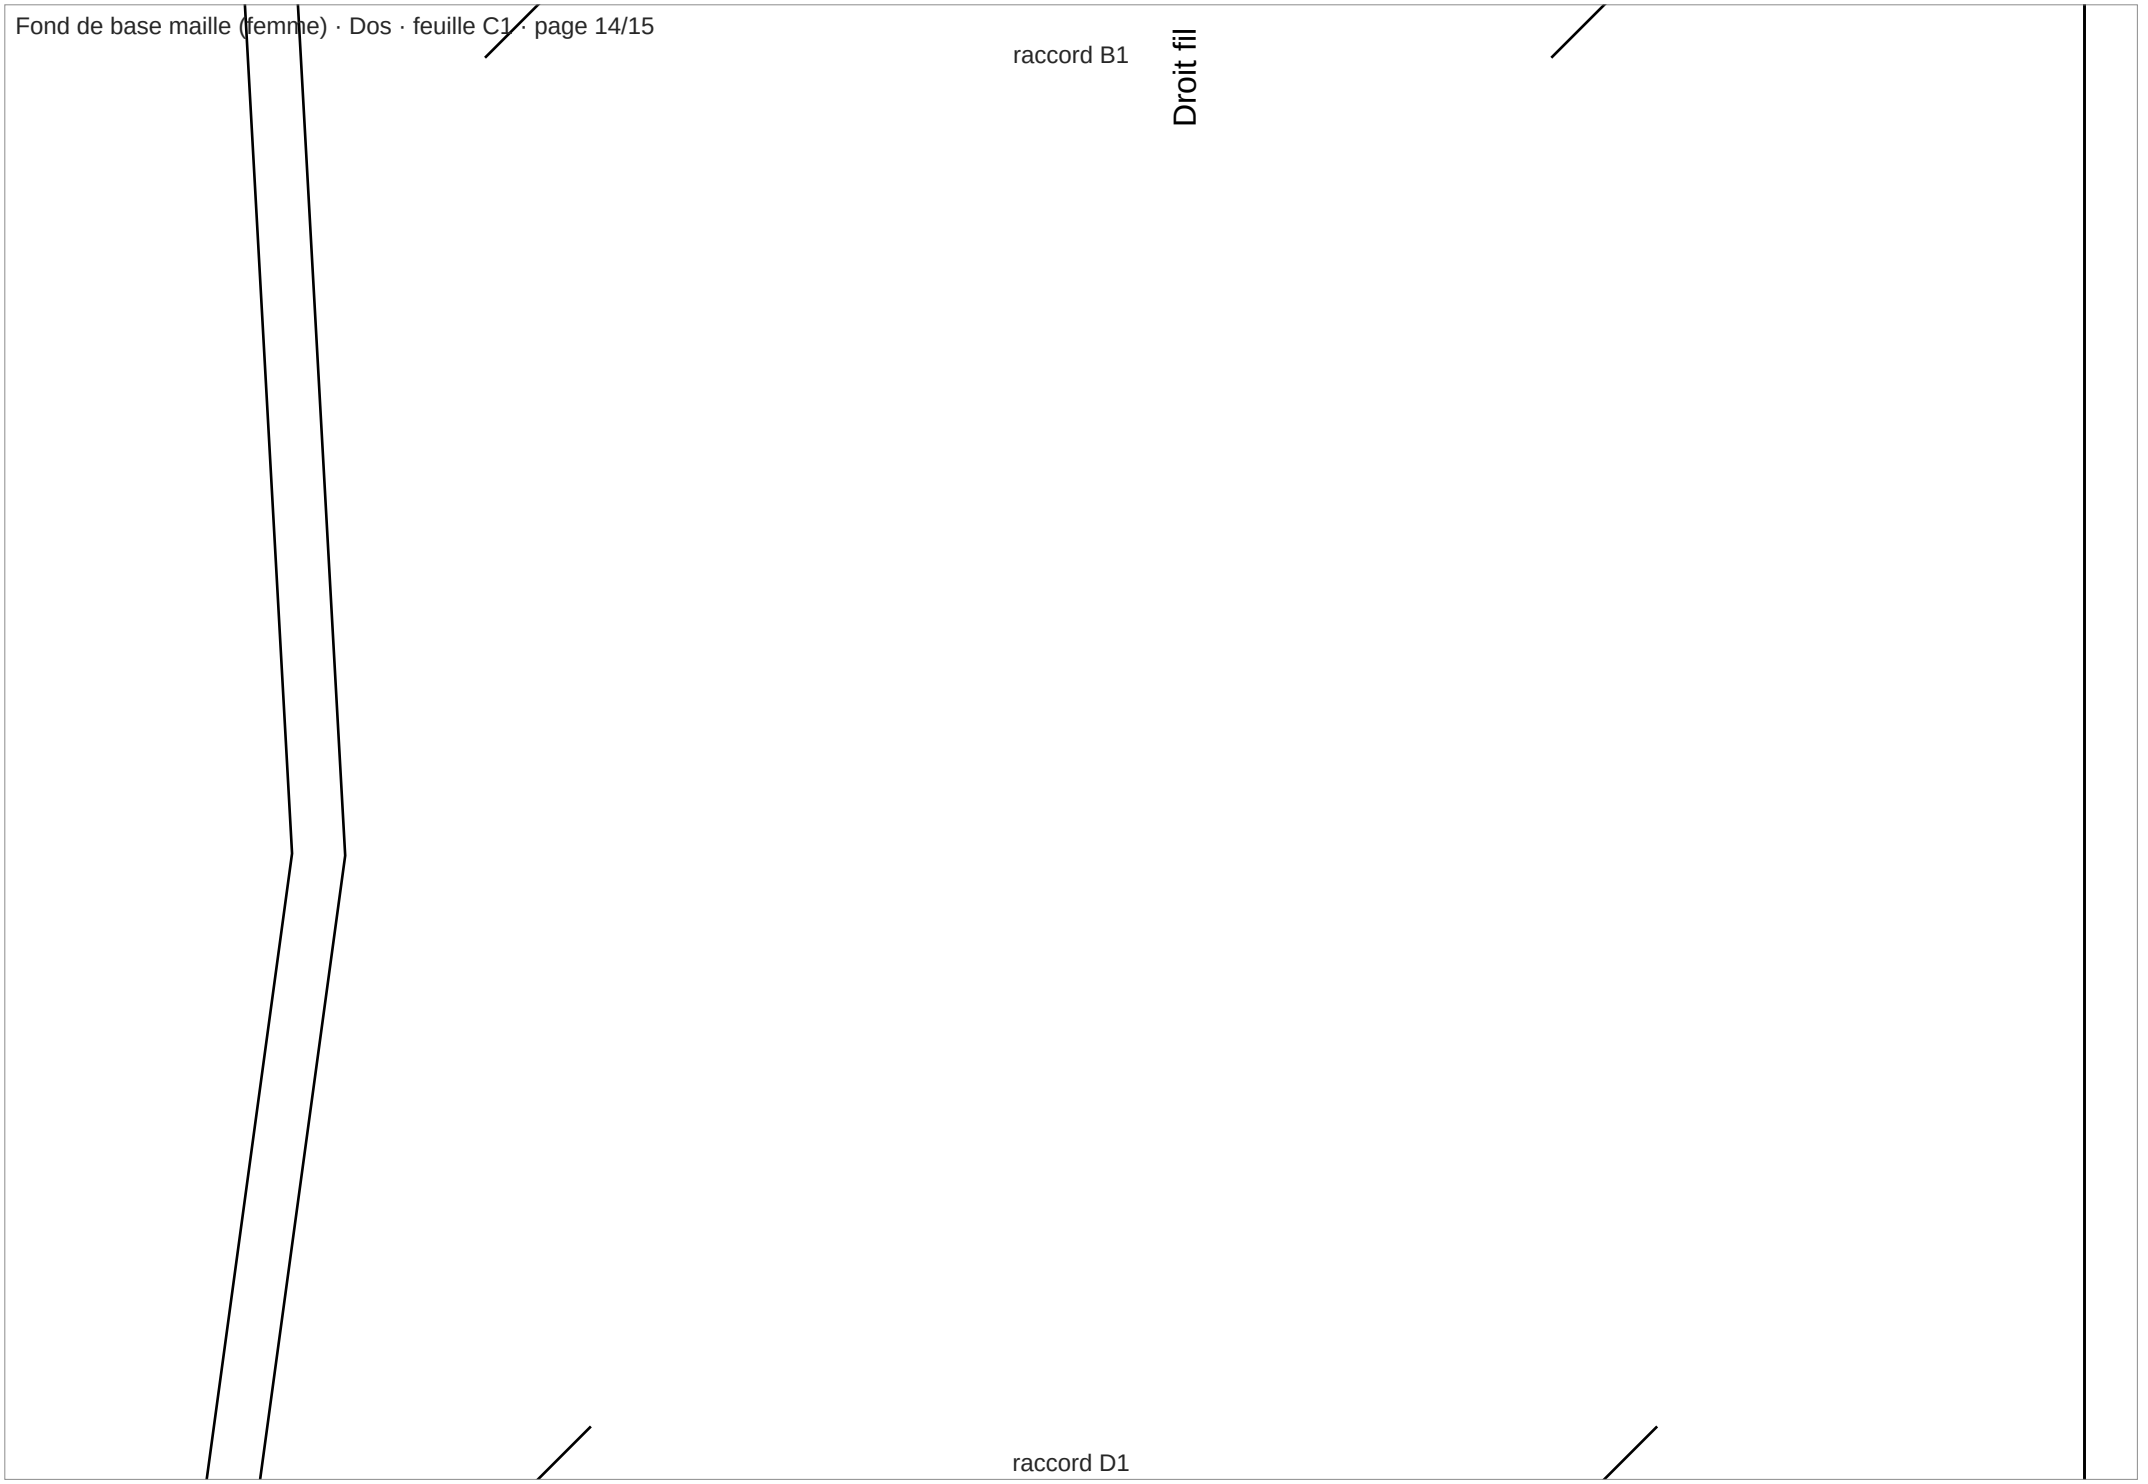
*Base*

*T42*

Dos

*Tissu X1*

raccord C1


raccord B1
Droit fil
raccord D1

raccord C1

