Fond de base maille (homme)

Taille 54 · tracé et export Seamly2D

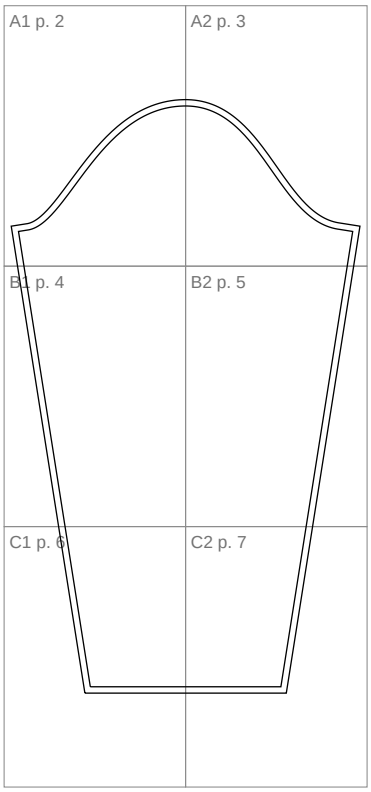
Carré 5×5

Imprimer à 100 % (« taille réelle », sans ajustement à la page). Vérifier le carré de contrôle ci-contre : 5 cm de côté. Chaque pièce a ses propres feuilles : couper chaque feuille sur le cadre gris là où elle touche une voisine, puis scotcher bord à bord selon le plan (lettre = rangée, chiffre = colonne). Tracé extérieur : ligne de coupe, coutures comprises ; tracé intérieur : ligne de couture.

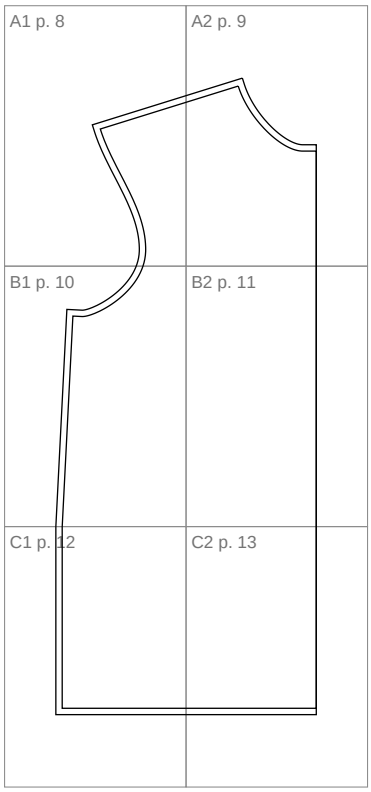
Pièces et assemblages (18 feuilles A4)

Manche (couper 2 fois (en symétrie)) : 6 feuilles portrait, 7 raccords, pages 2 à 7
Devant (couper 1 fois au pli) : 6 feuilles portrait, 7 raccords, pages 8 à 13
Dos (couper 1 fois au pli) : 6 feuilles portrait, 7 raccords, pages 14 à 19

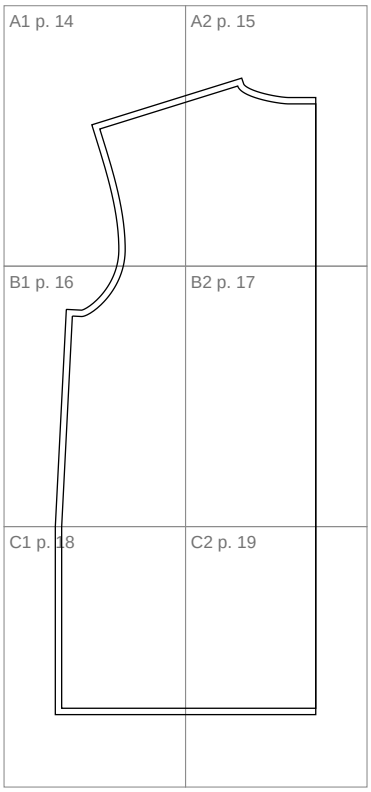
Manche

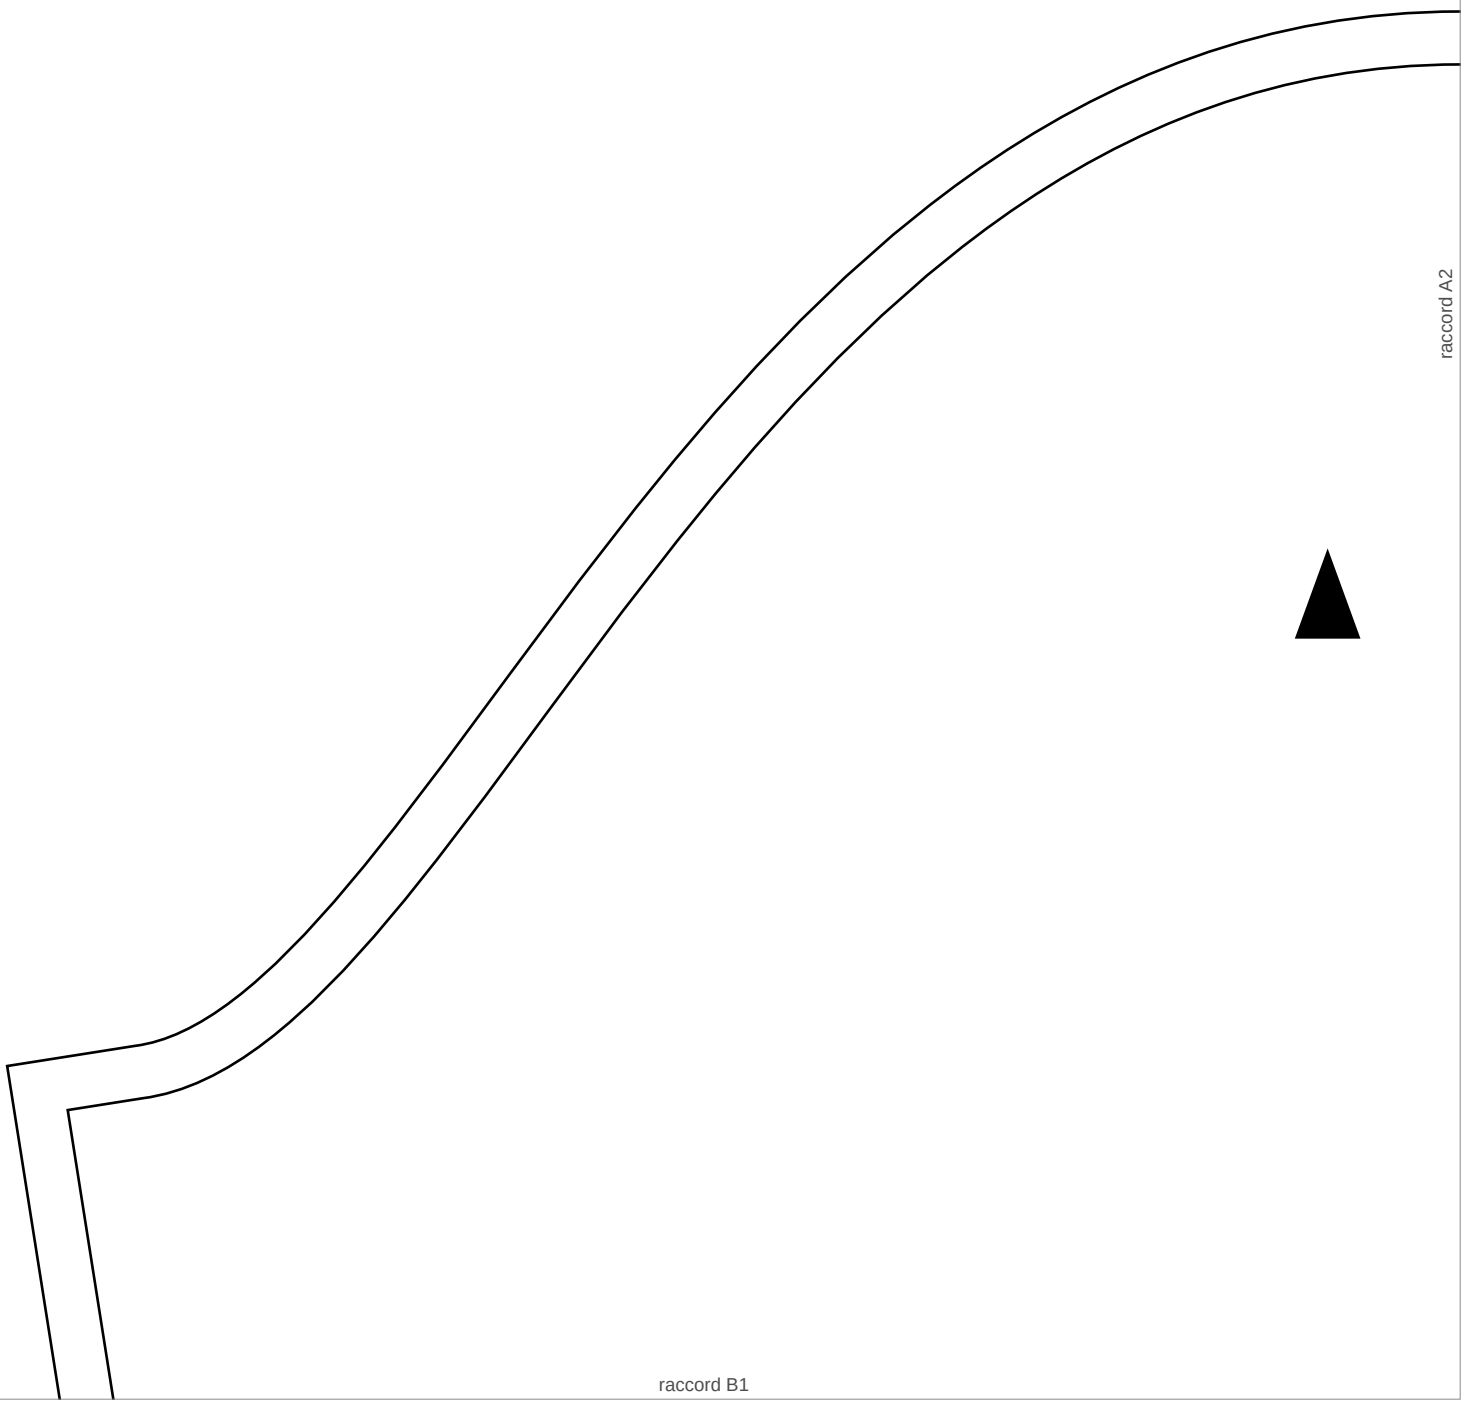


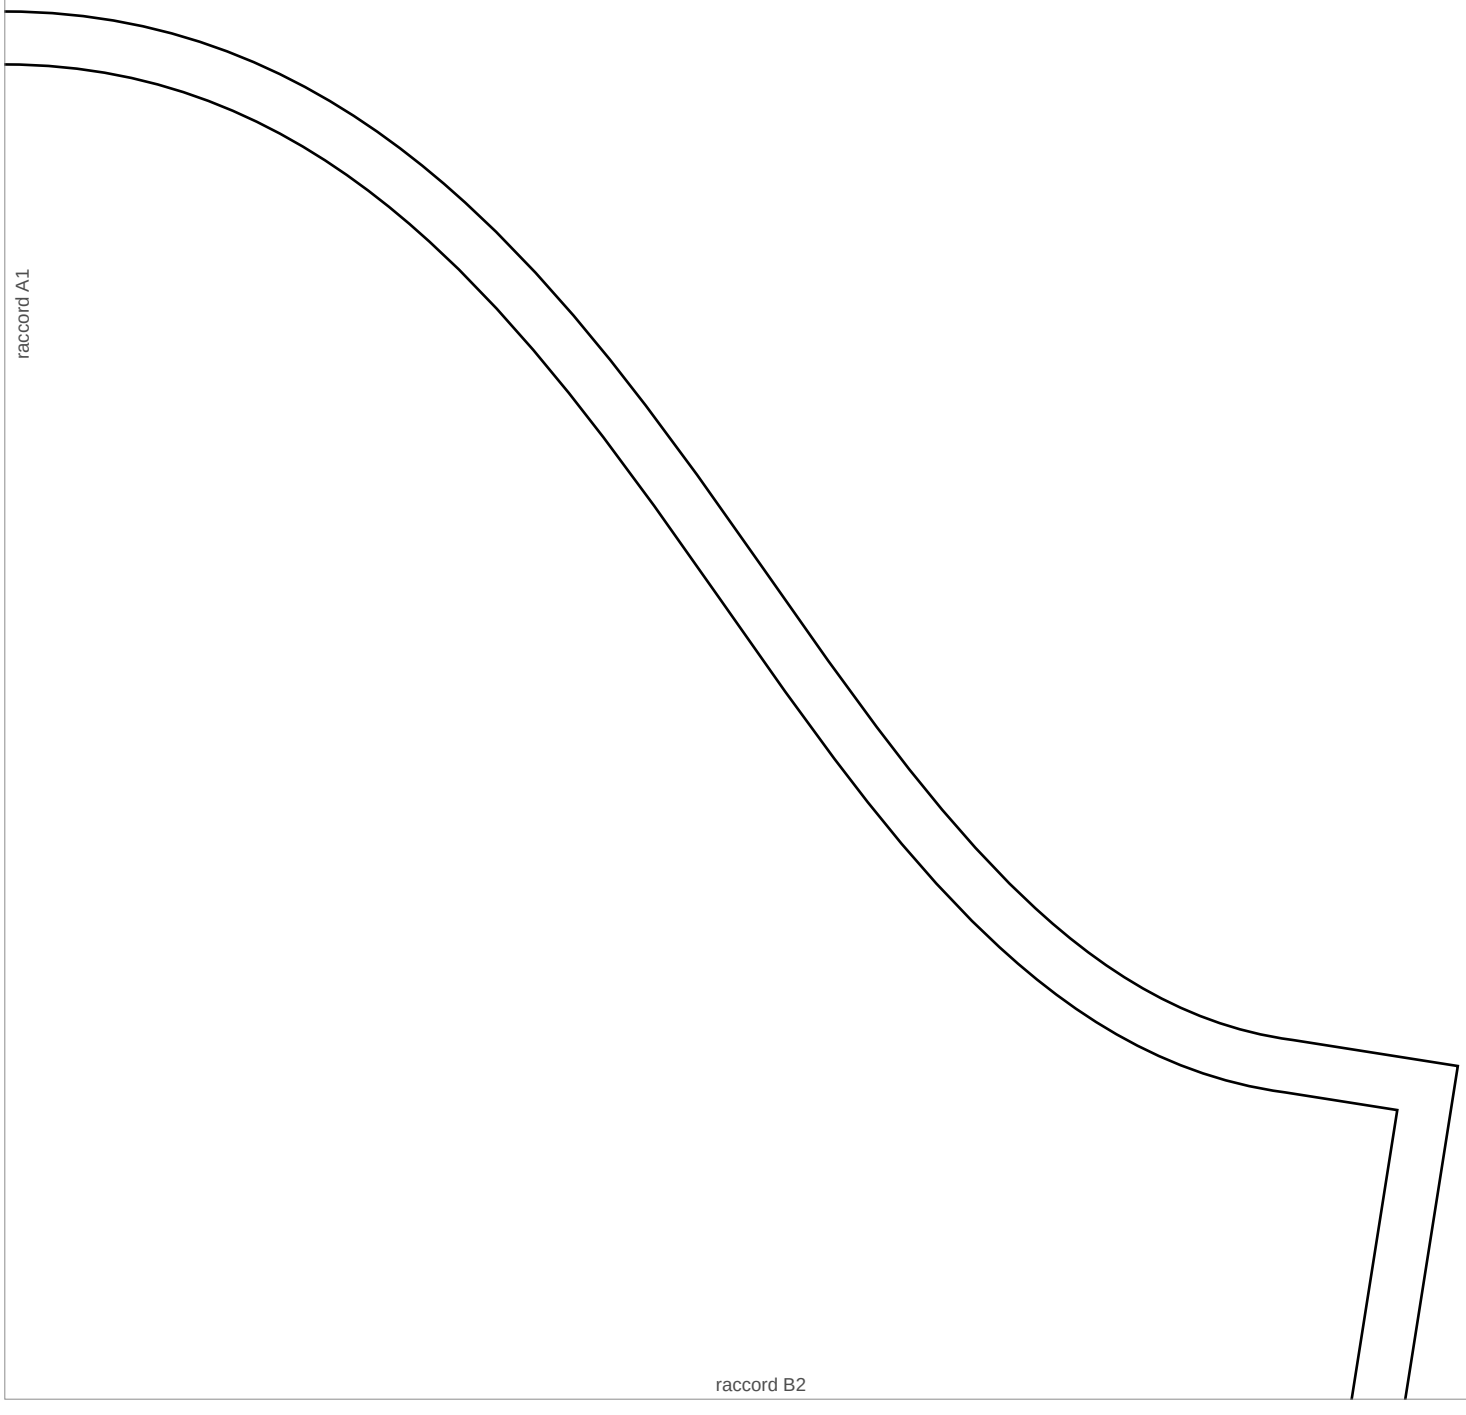
Devant



Dos




raccord A2
raccord B1


raccord A1
raccord B2

raccord A1

FOND DE BASE MAILLE

Base

T54

raccord B2

raccord C1

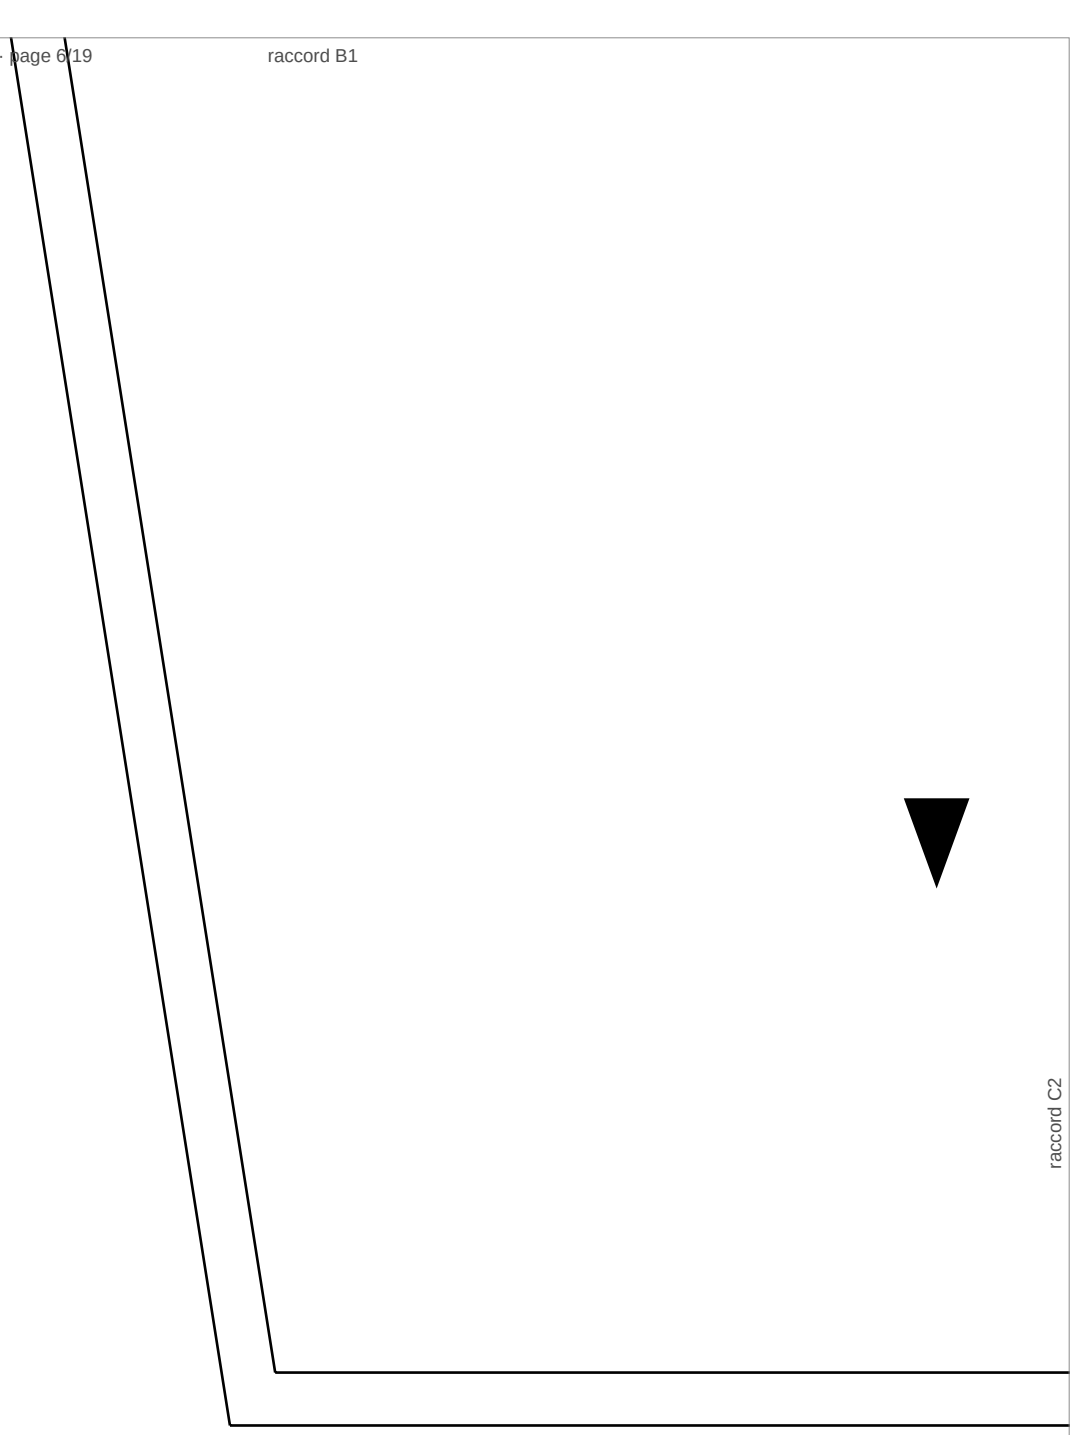
raccord A2

Ma...he
Tissu X2

raccord B1

raccord C2

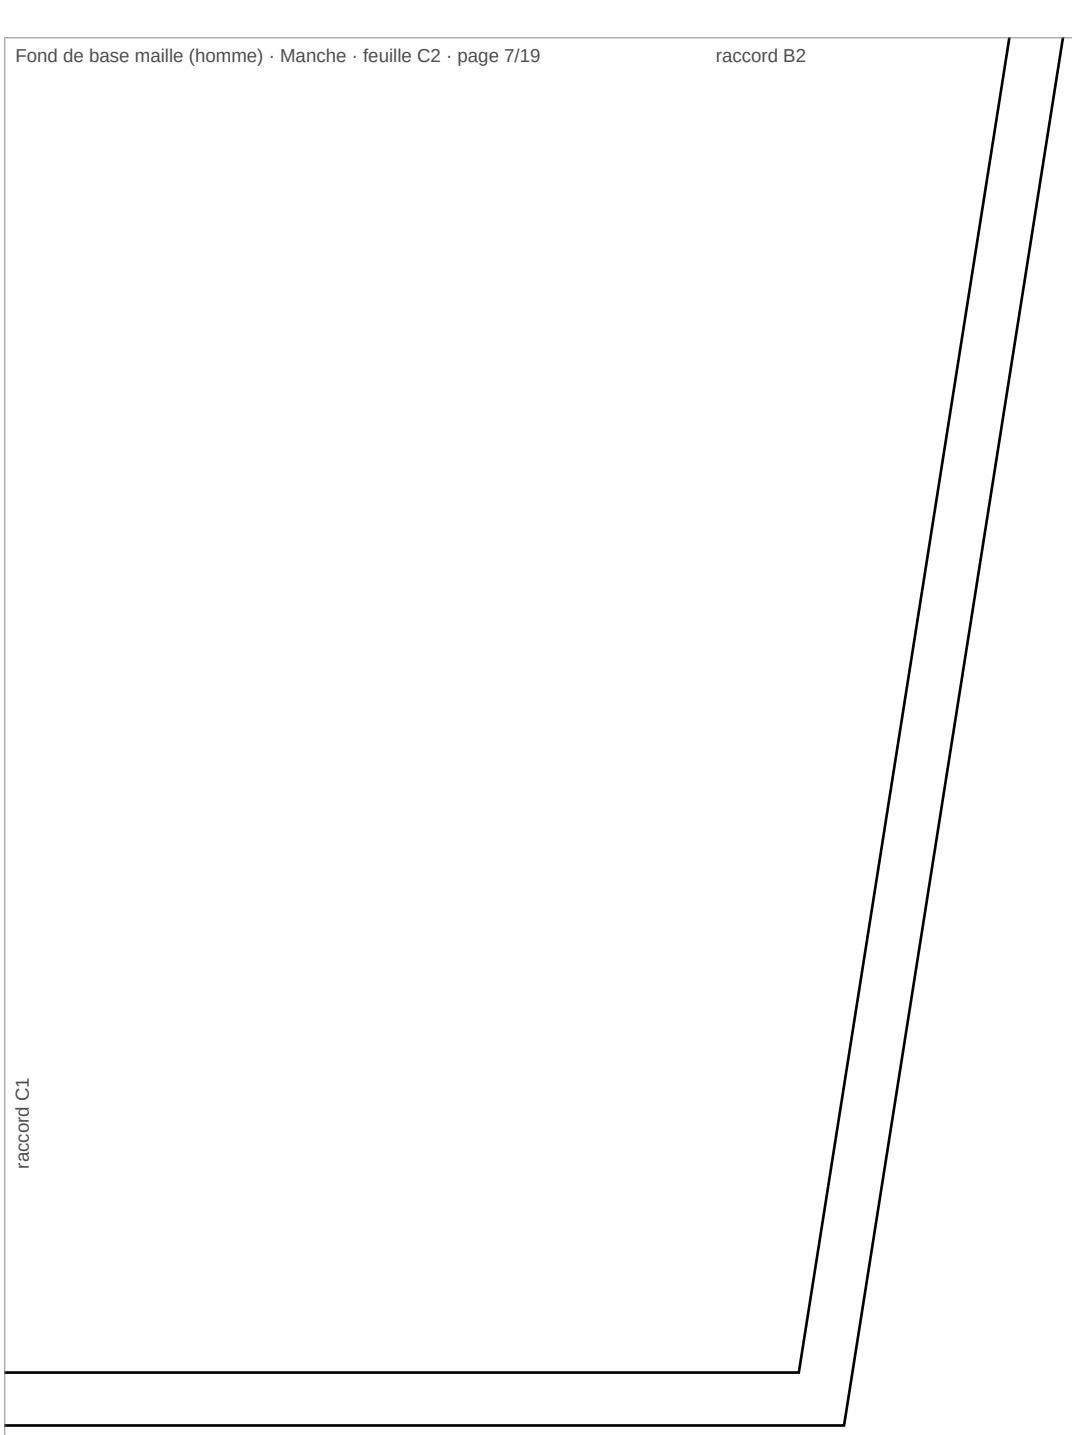
raccord B1

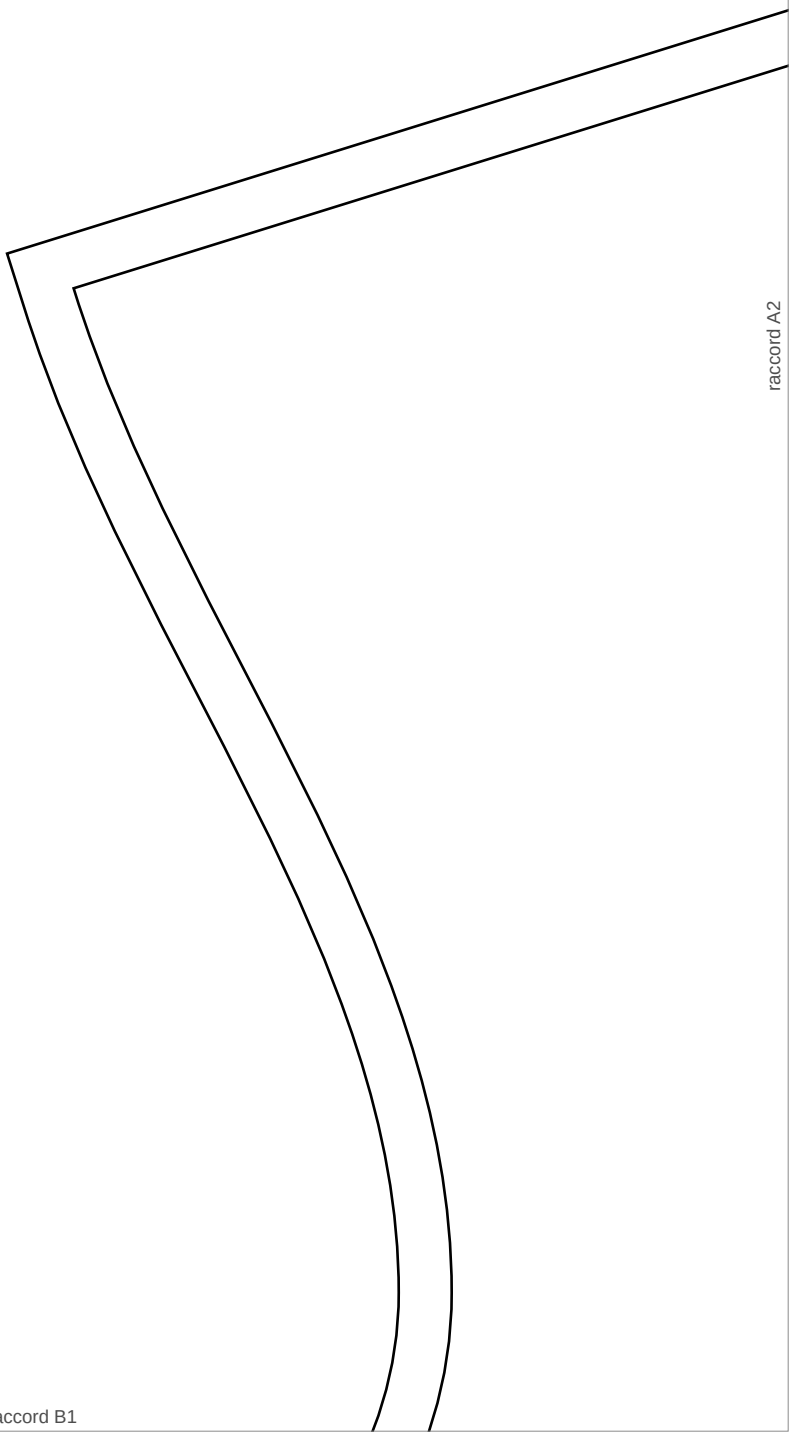


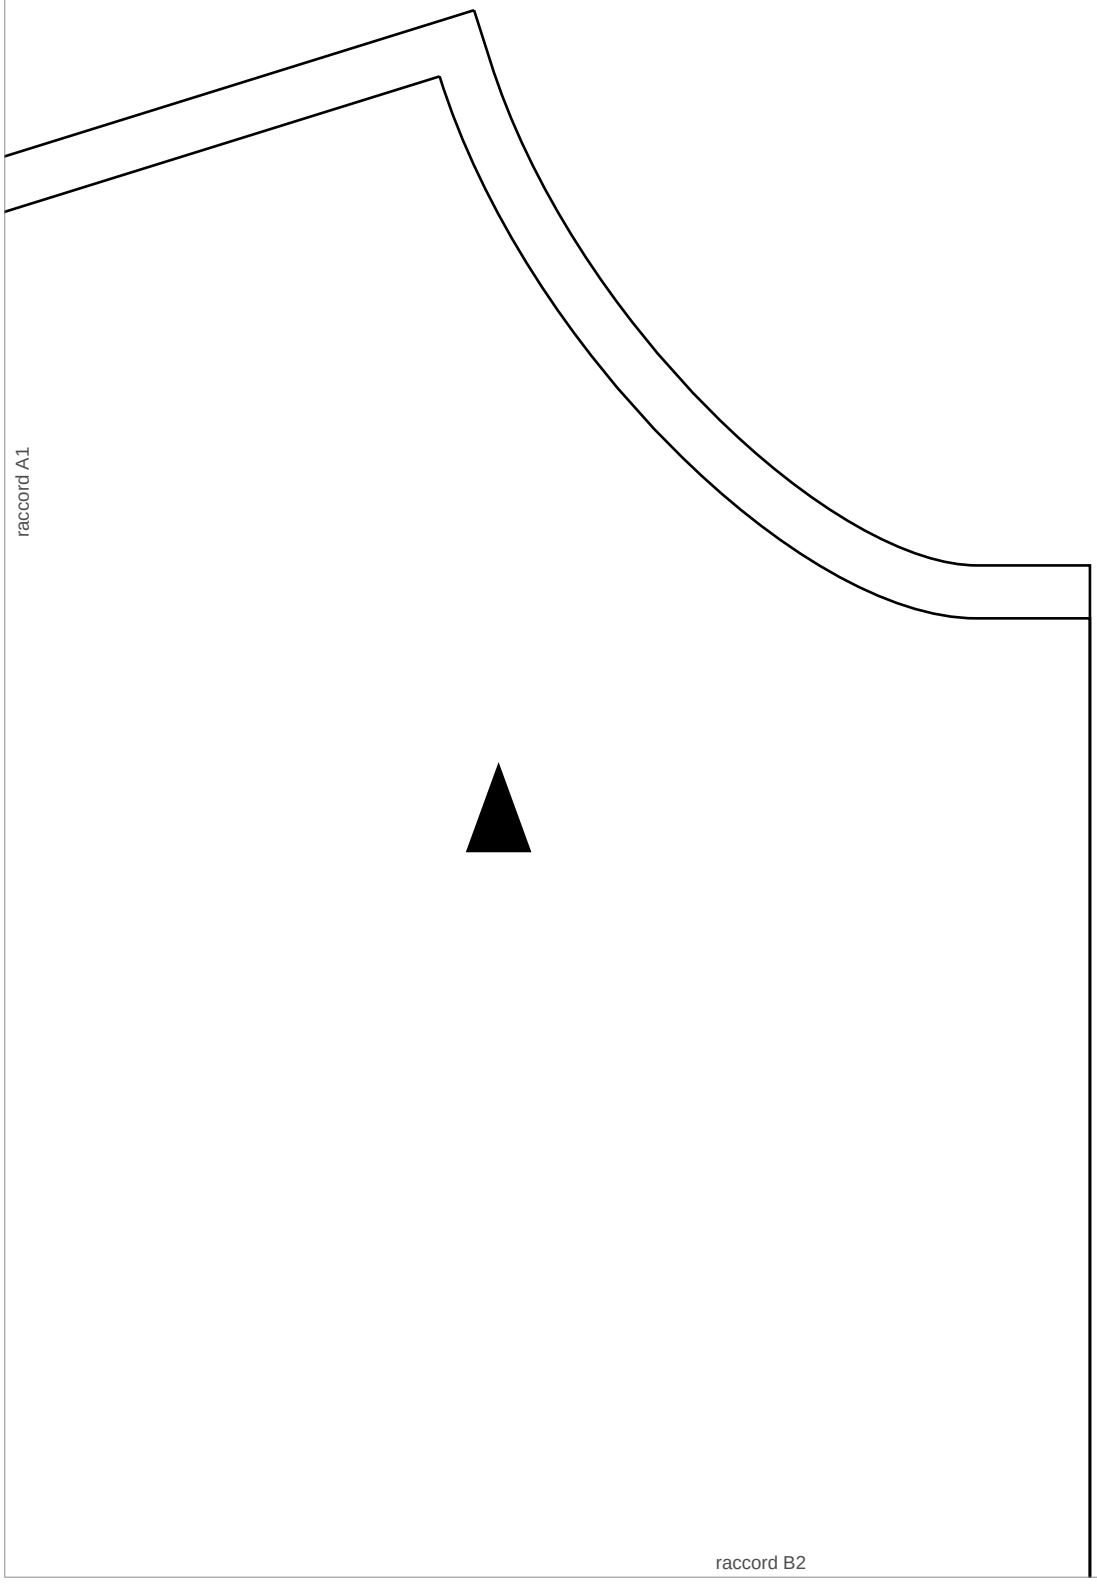
raccord C2

raccord B2

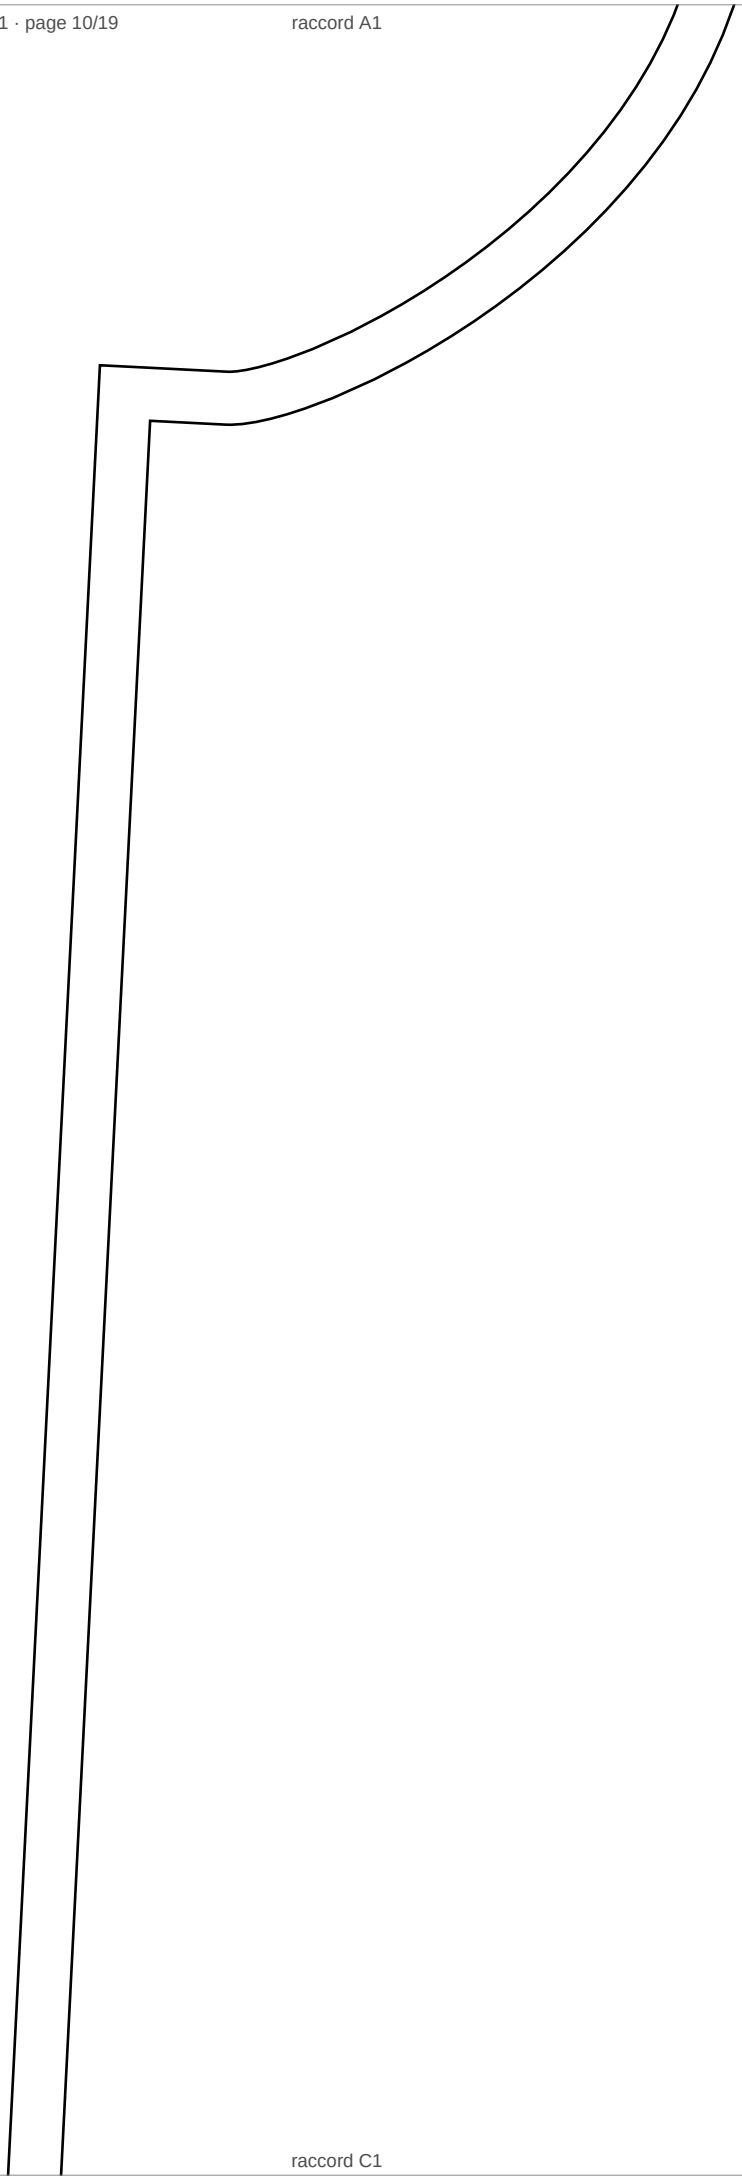
raccord C1




raccord A2
raccord B1


raccord A1
raccord B2

raccord A1



FOND D

raccord B1

raccord C1

raccord A2

raccord B2

E BASE MAILLE


Base

T54

Devant

Tissu X1

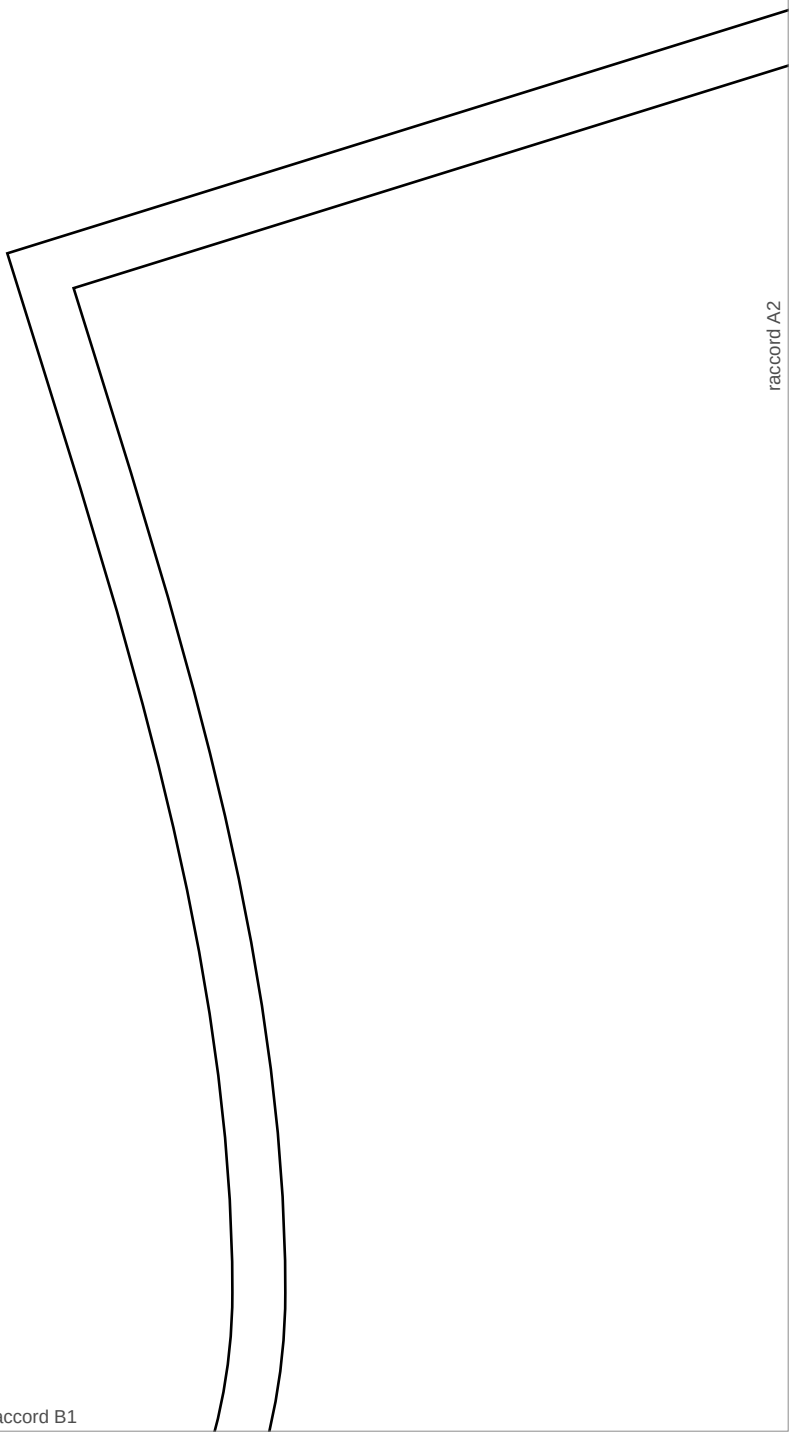
raccord C2

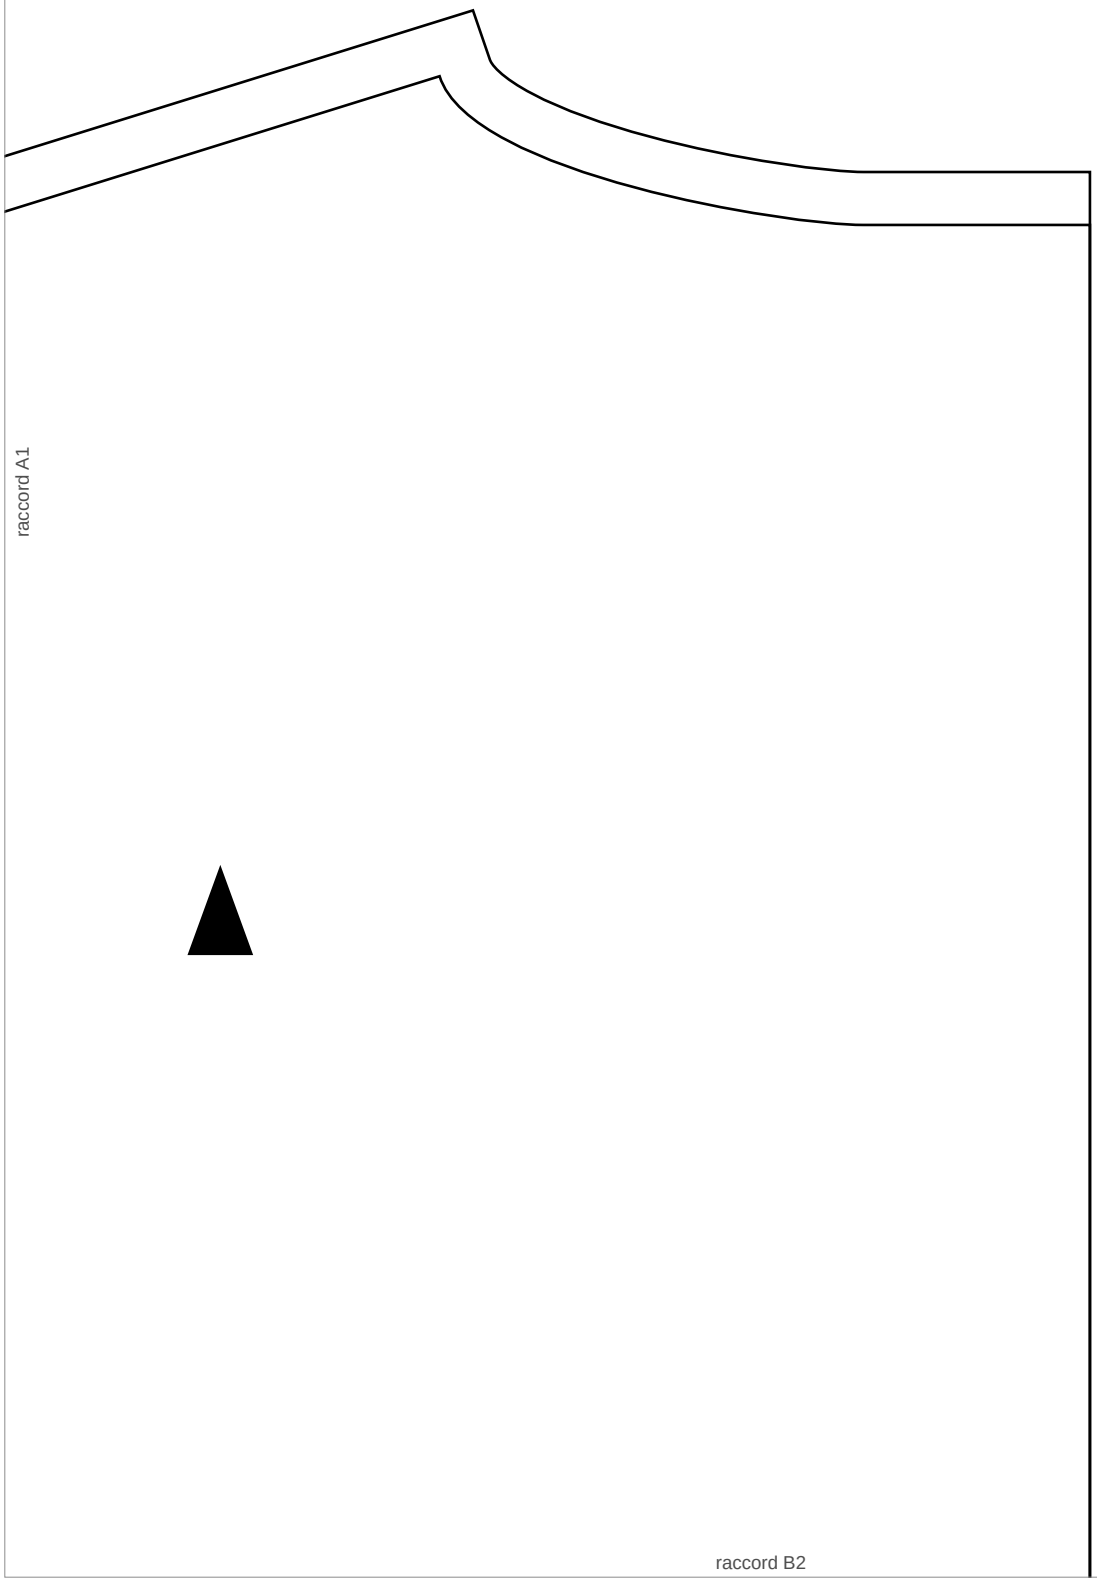

raccord B1
raccord C2

raccord B2

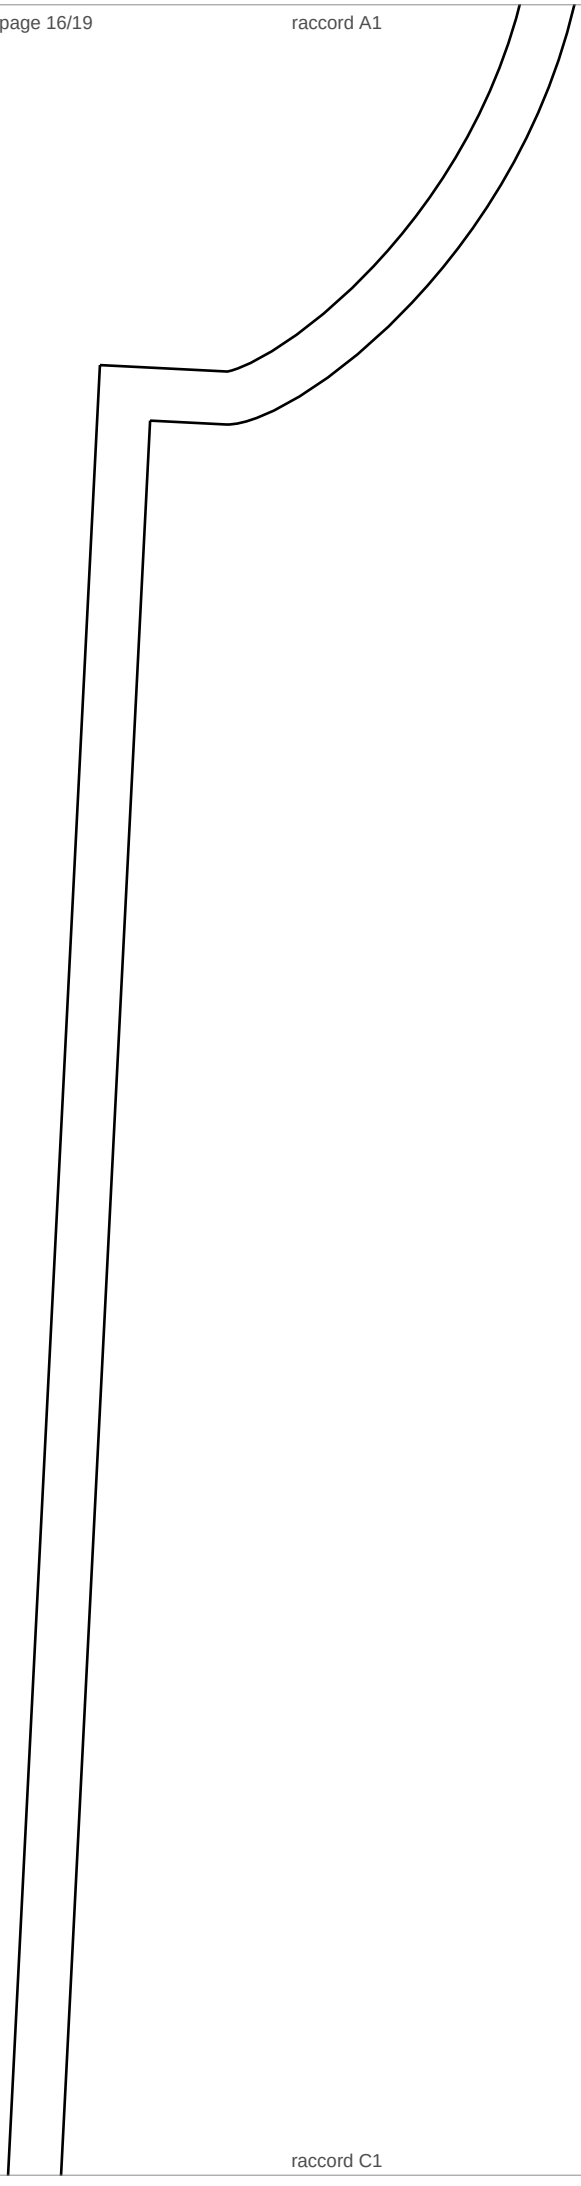


raccord C1


raccord A2
raccord B1


raccord A1
raccord B2

raccord A1



FOND DE BASE MA

Base

T54

raccord B2

raccord C1

raccord A2


AILLE

raccord B1

Dos

Tissu X1

raccord C2


raccord B1
raccord C2

raccord B2



raccord C1