Fond de base maille (femme)

Taille 44 · tracé et export Seamly2D


Carré 5×5

Imprimer à 100 % (« taille réelle », sans ajustement à la page). Vérifier le carré de contrôle ci-contre : 5 cm de côté. Chaque pièce a ses propres feuilles : couper chaque feuille sur le cadre gris là où elle touche une voisine, puis scotcher bord à bord selon le plan (lettre = rangée, chiffre = colonne). Tracé extérieur : ligne de coupe, coutures comprises ; tracé intérieur : ligne de couture.


Pièces et assemblages (14 feuilles A4)

Manche (couper 2 fois (en symétrie)) : 6 feuilles portrait, 7 raccords, pages 2 à 7
Devant (couper 1 fois au pli) : 4 feuilles paysage, 3 raccords, pages 8 à 11
Dos (couper 1 fois au pli) : 4 feuilles paysage, 3 raccords, pages 12 à 15


Manche

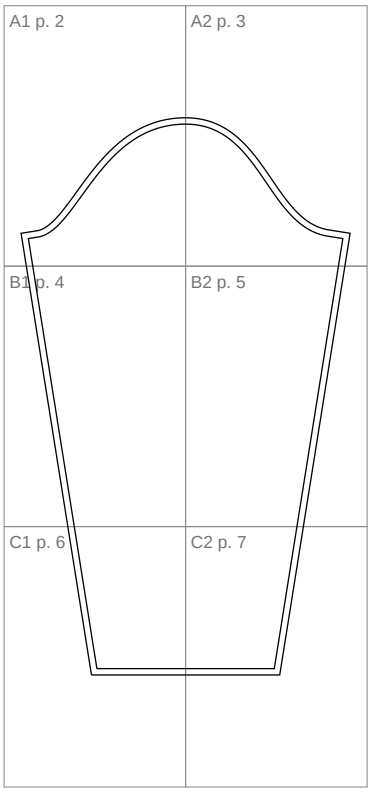



Devant

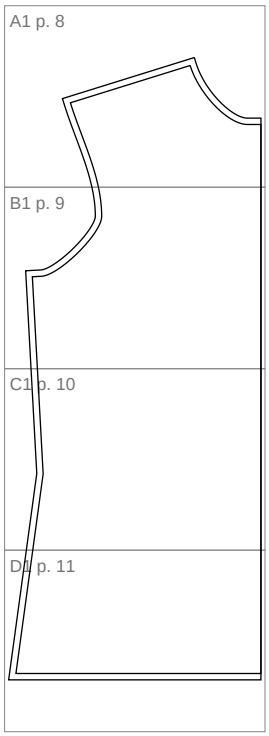


Dos

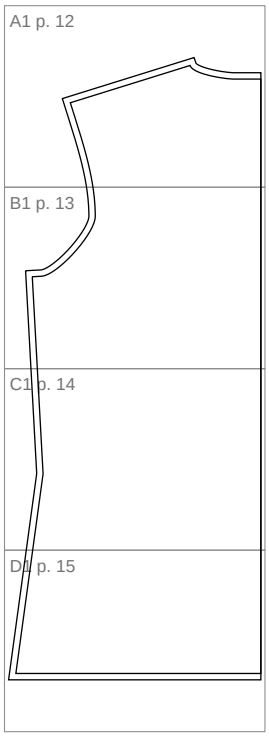

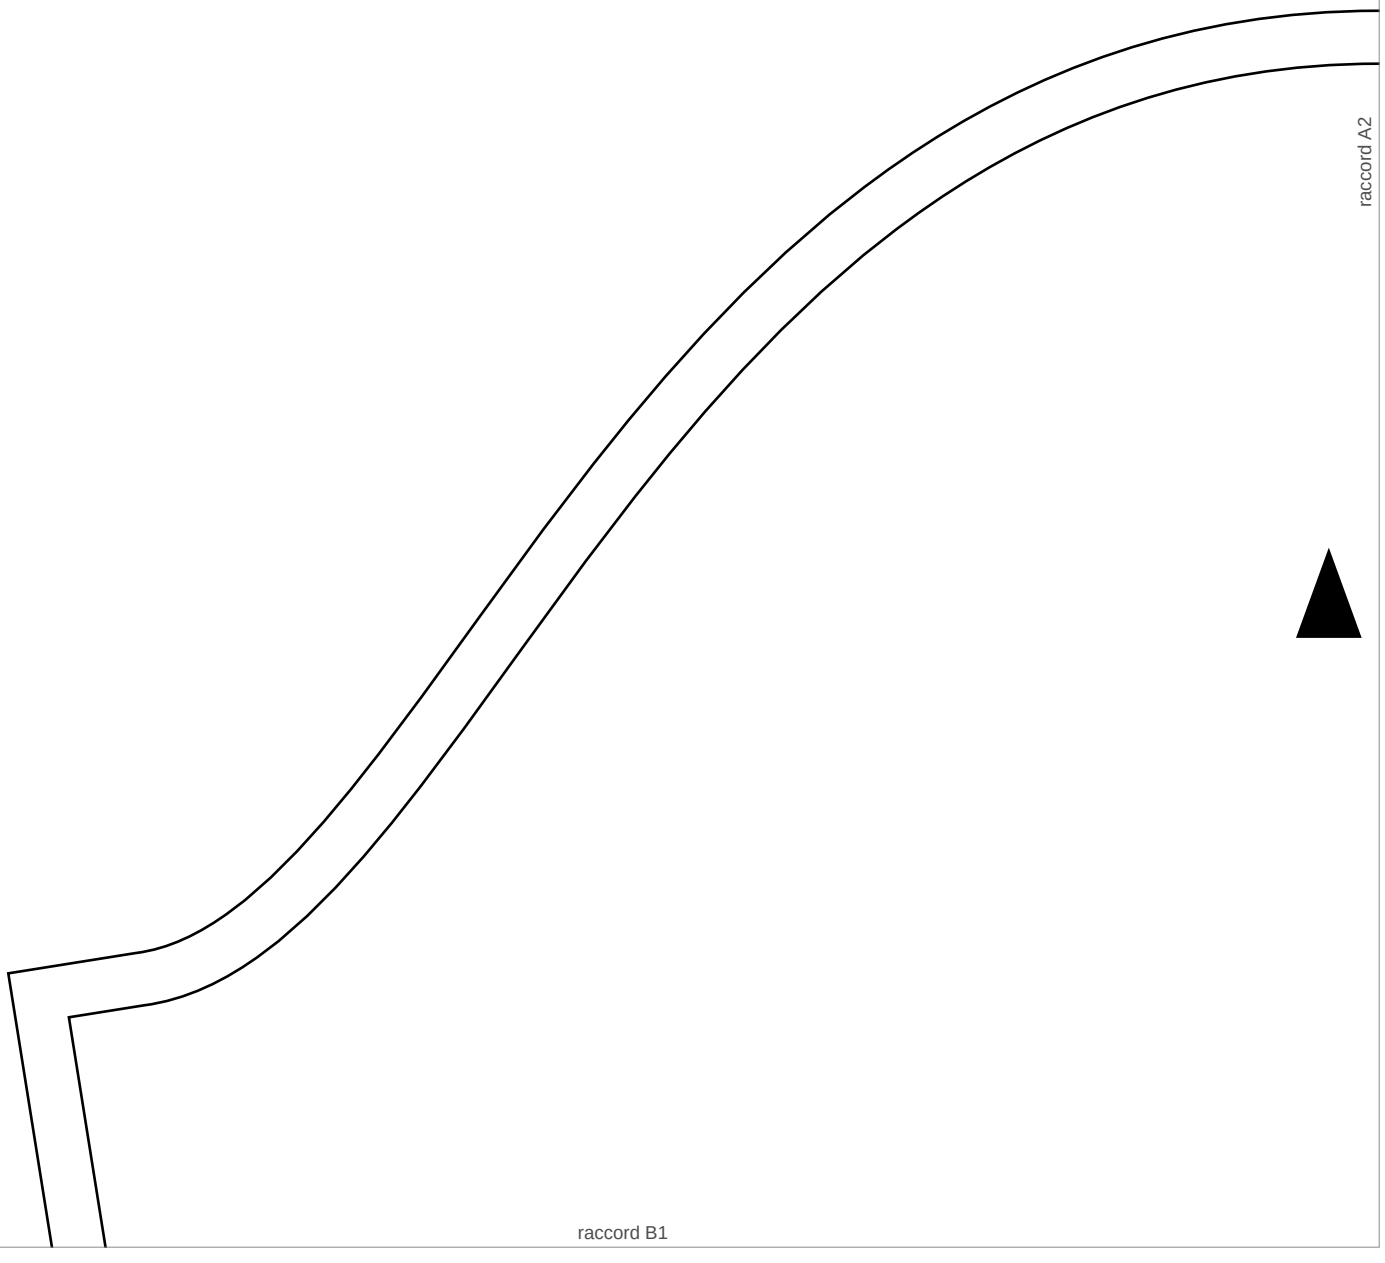
raccord A2
raccord B1

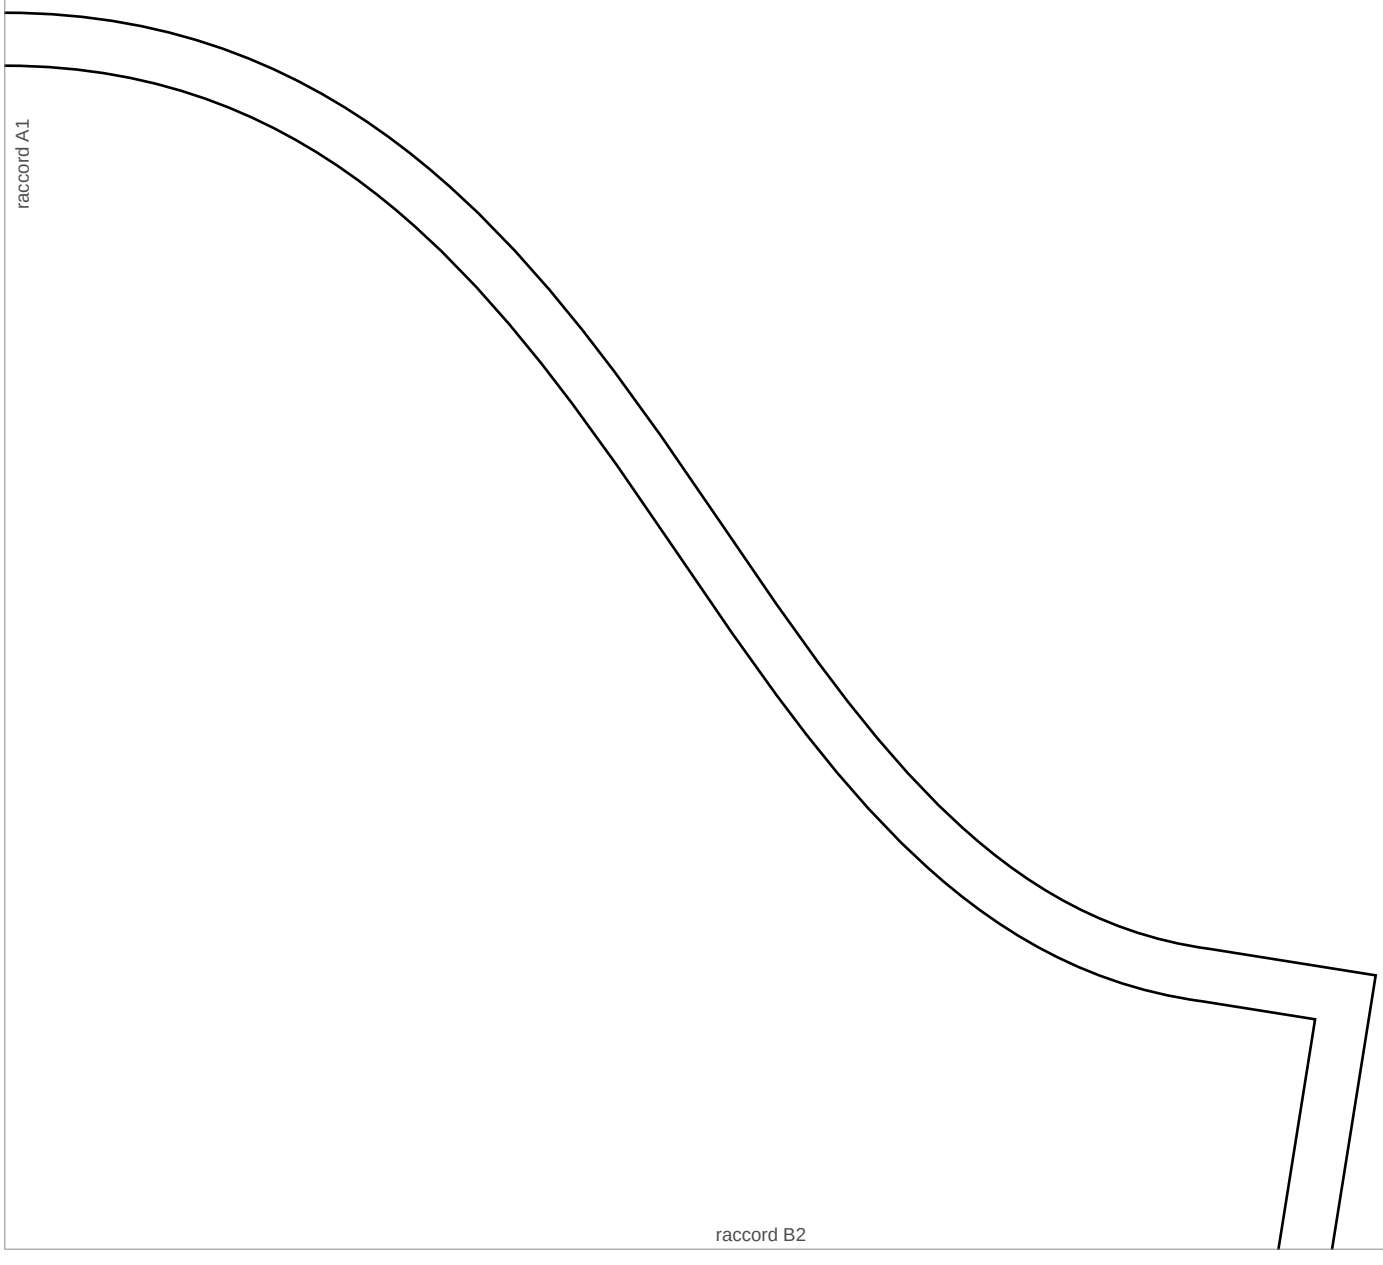
raccord A1
raccord B2

raccord A1

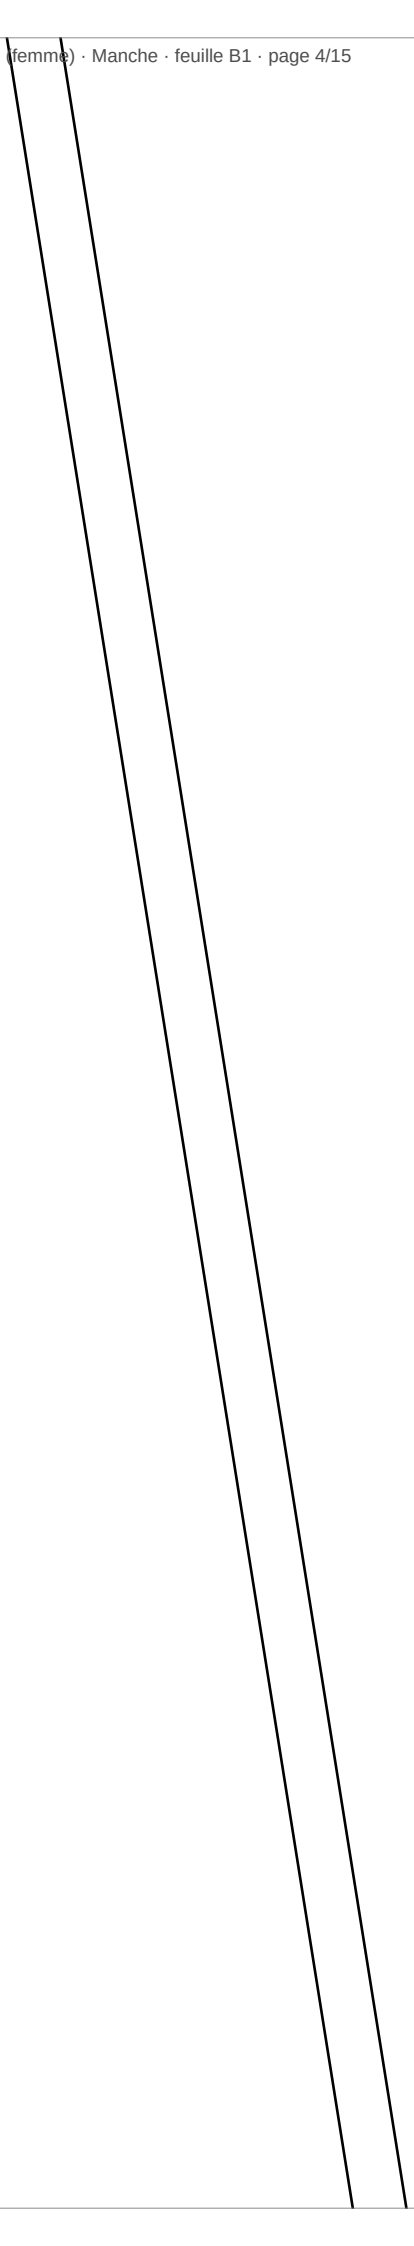

FOND DE BASE MAILLE

Base

T44


raccord B2

raccord C1


raccord A2


raccord B1


Ma...he
Tissu X2

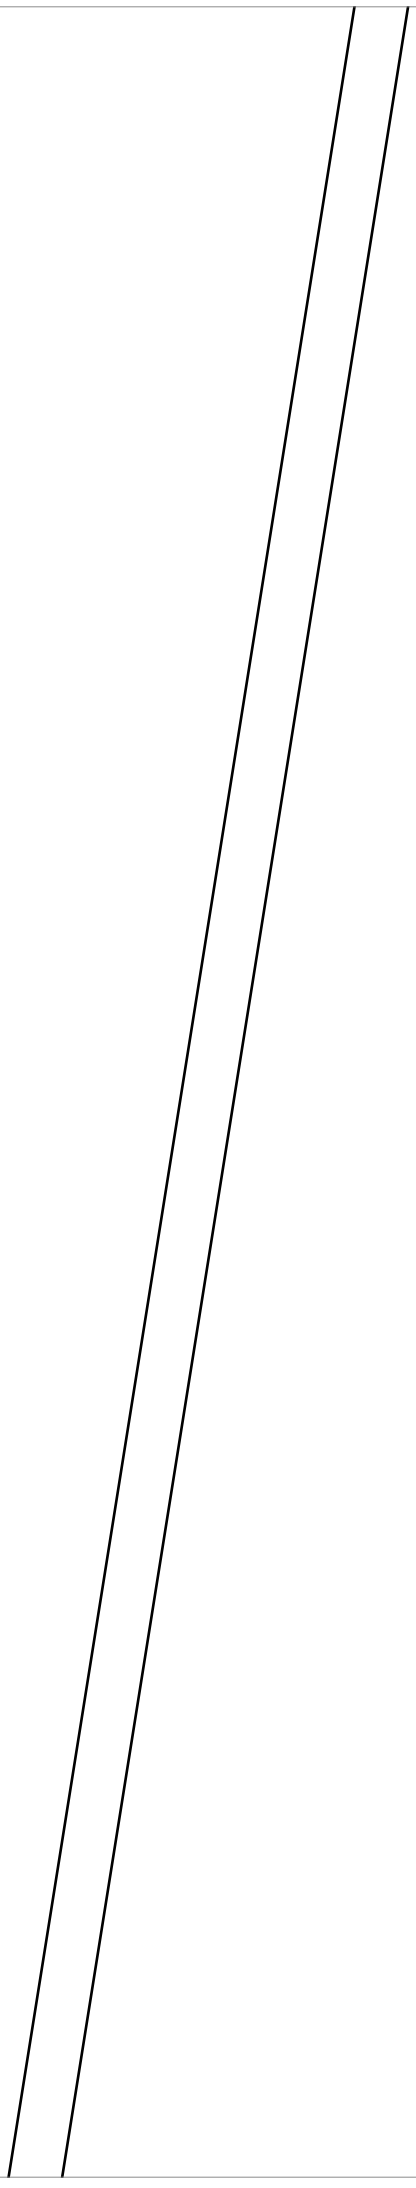

raccord C2

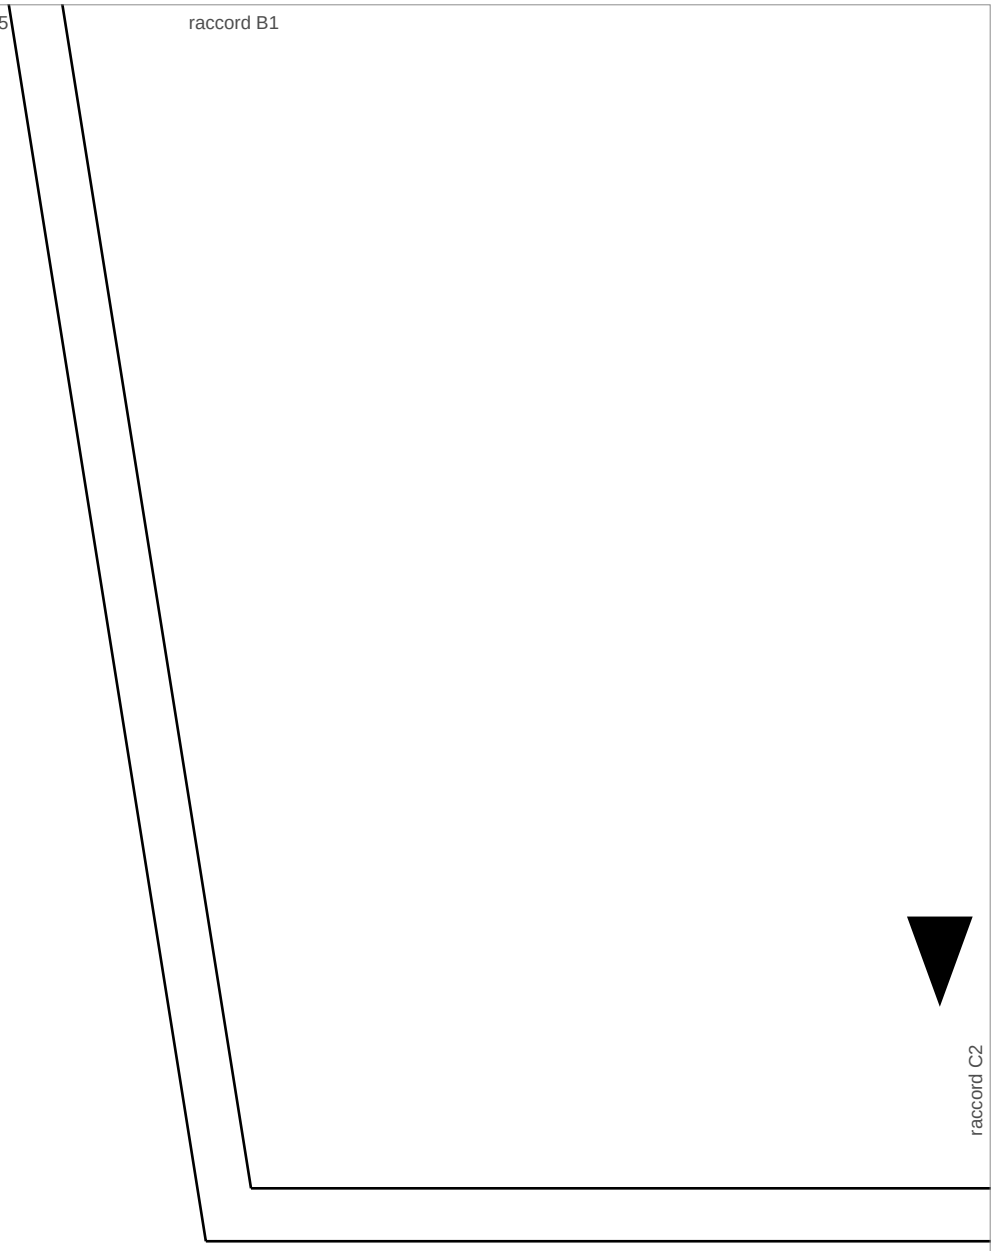

raccord B1
raccord C2

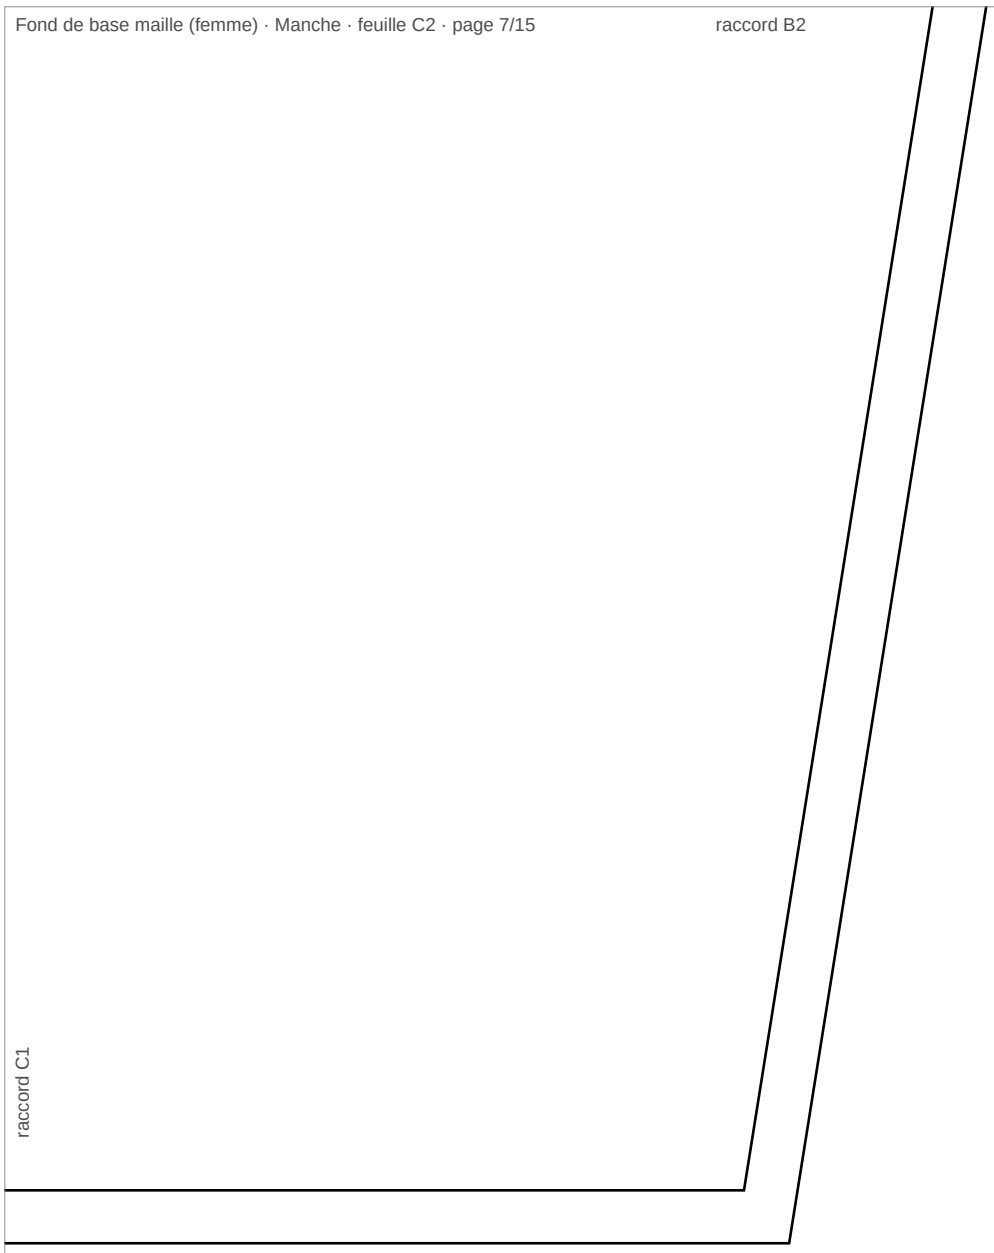
raccord B2
raccord C1

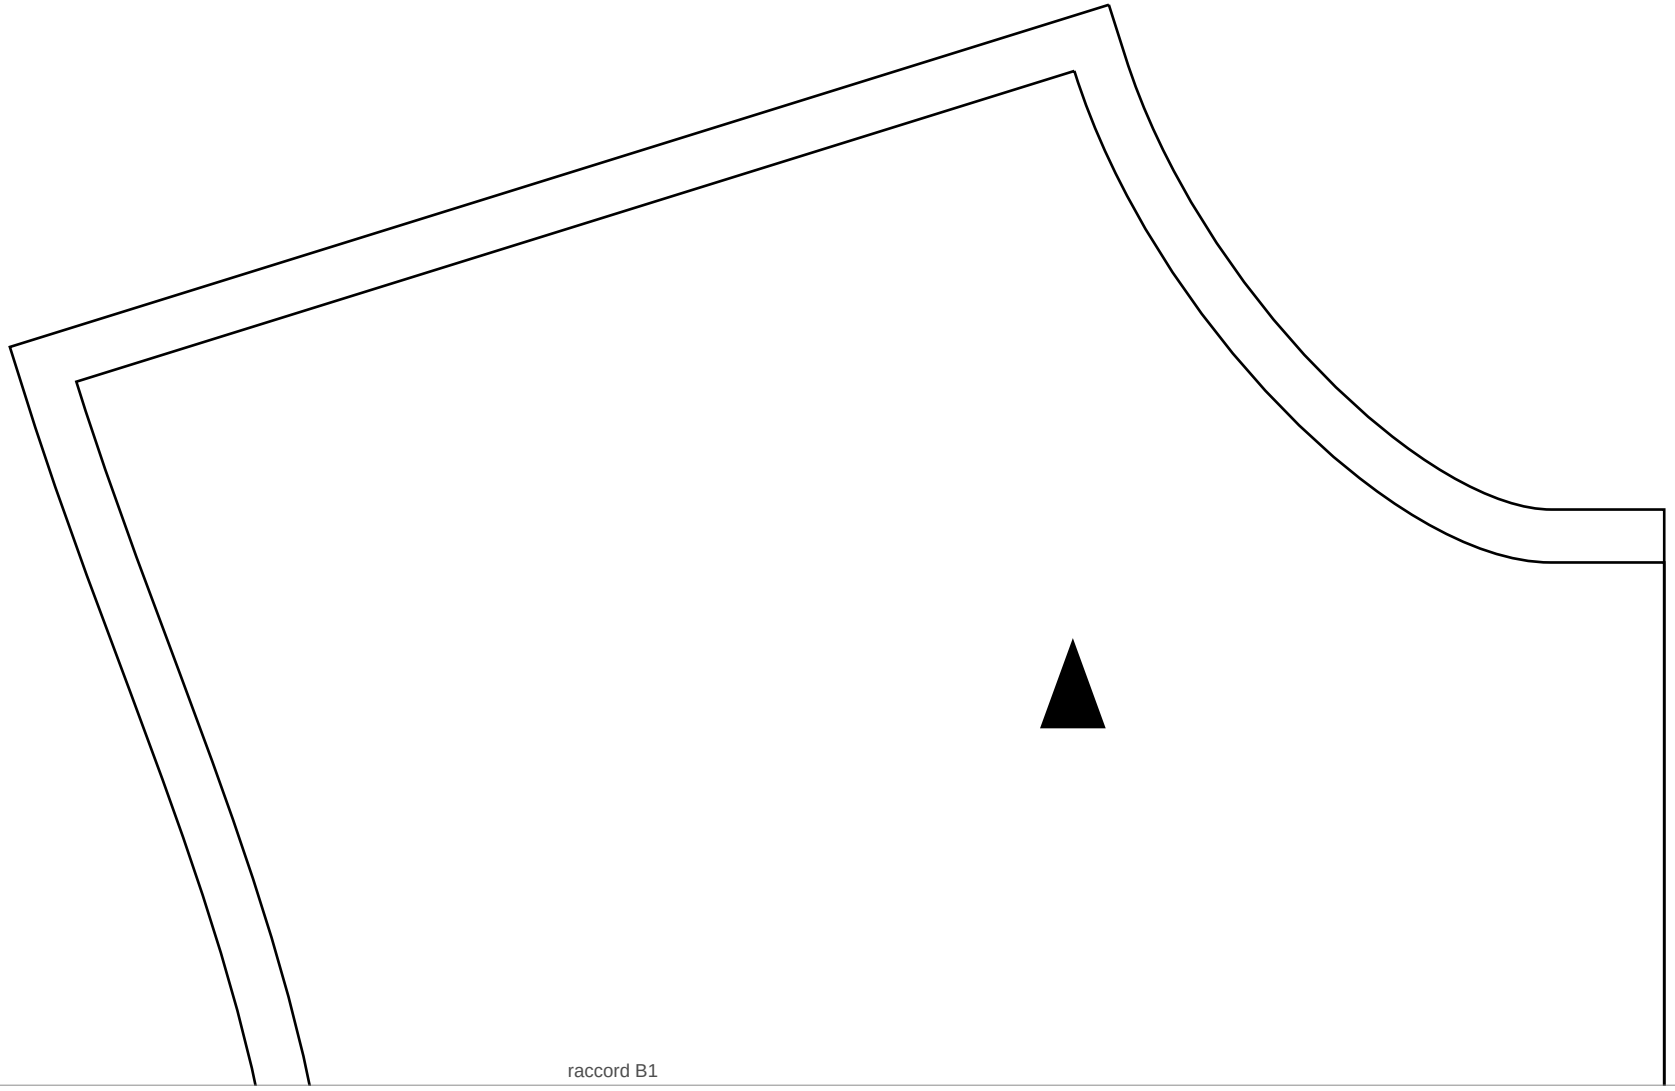

raccord B1

raccord A1

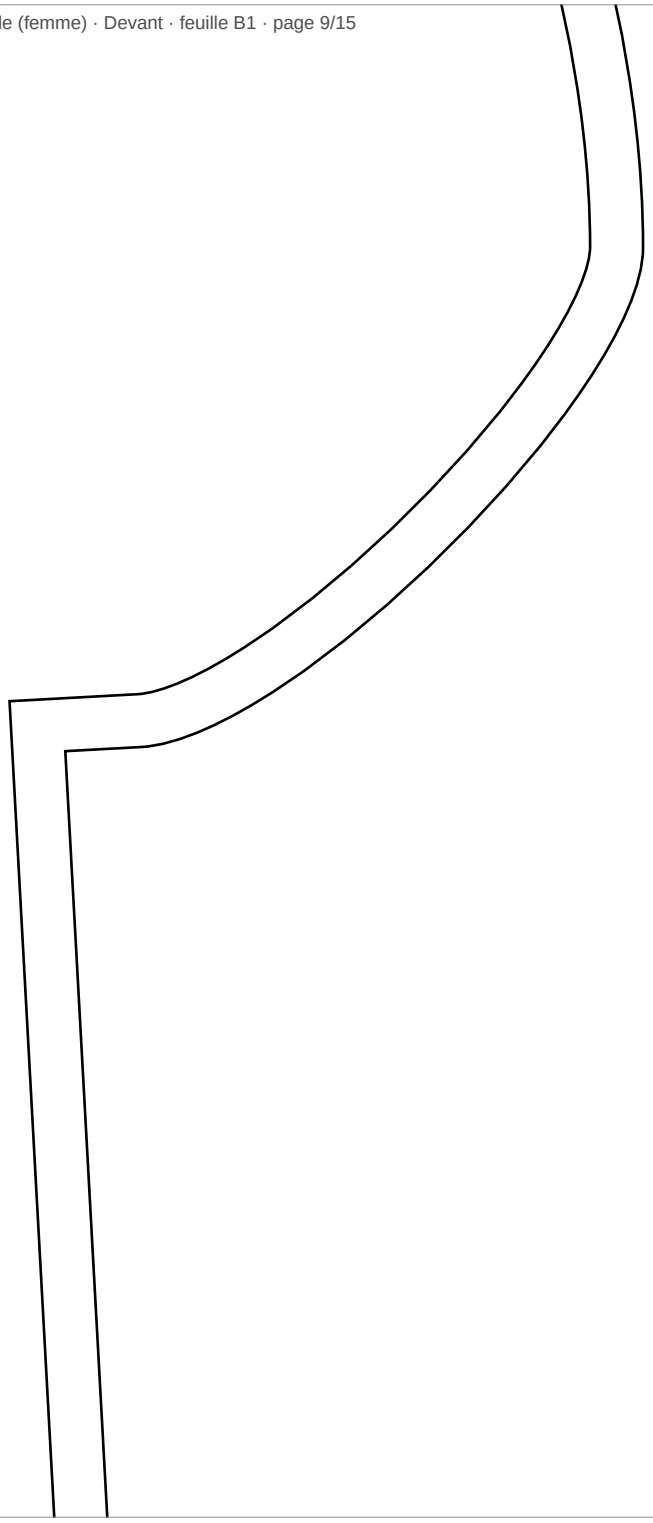

raccord G1

FOND DE BASE MAILLE

Base

T44

Devant

Tissu X1


raccord B1


144



raccord D1


raccord C1

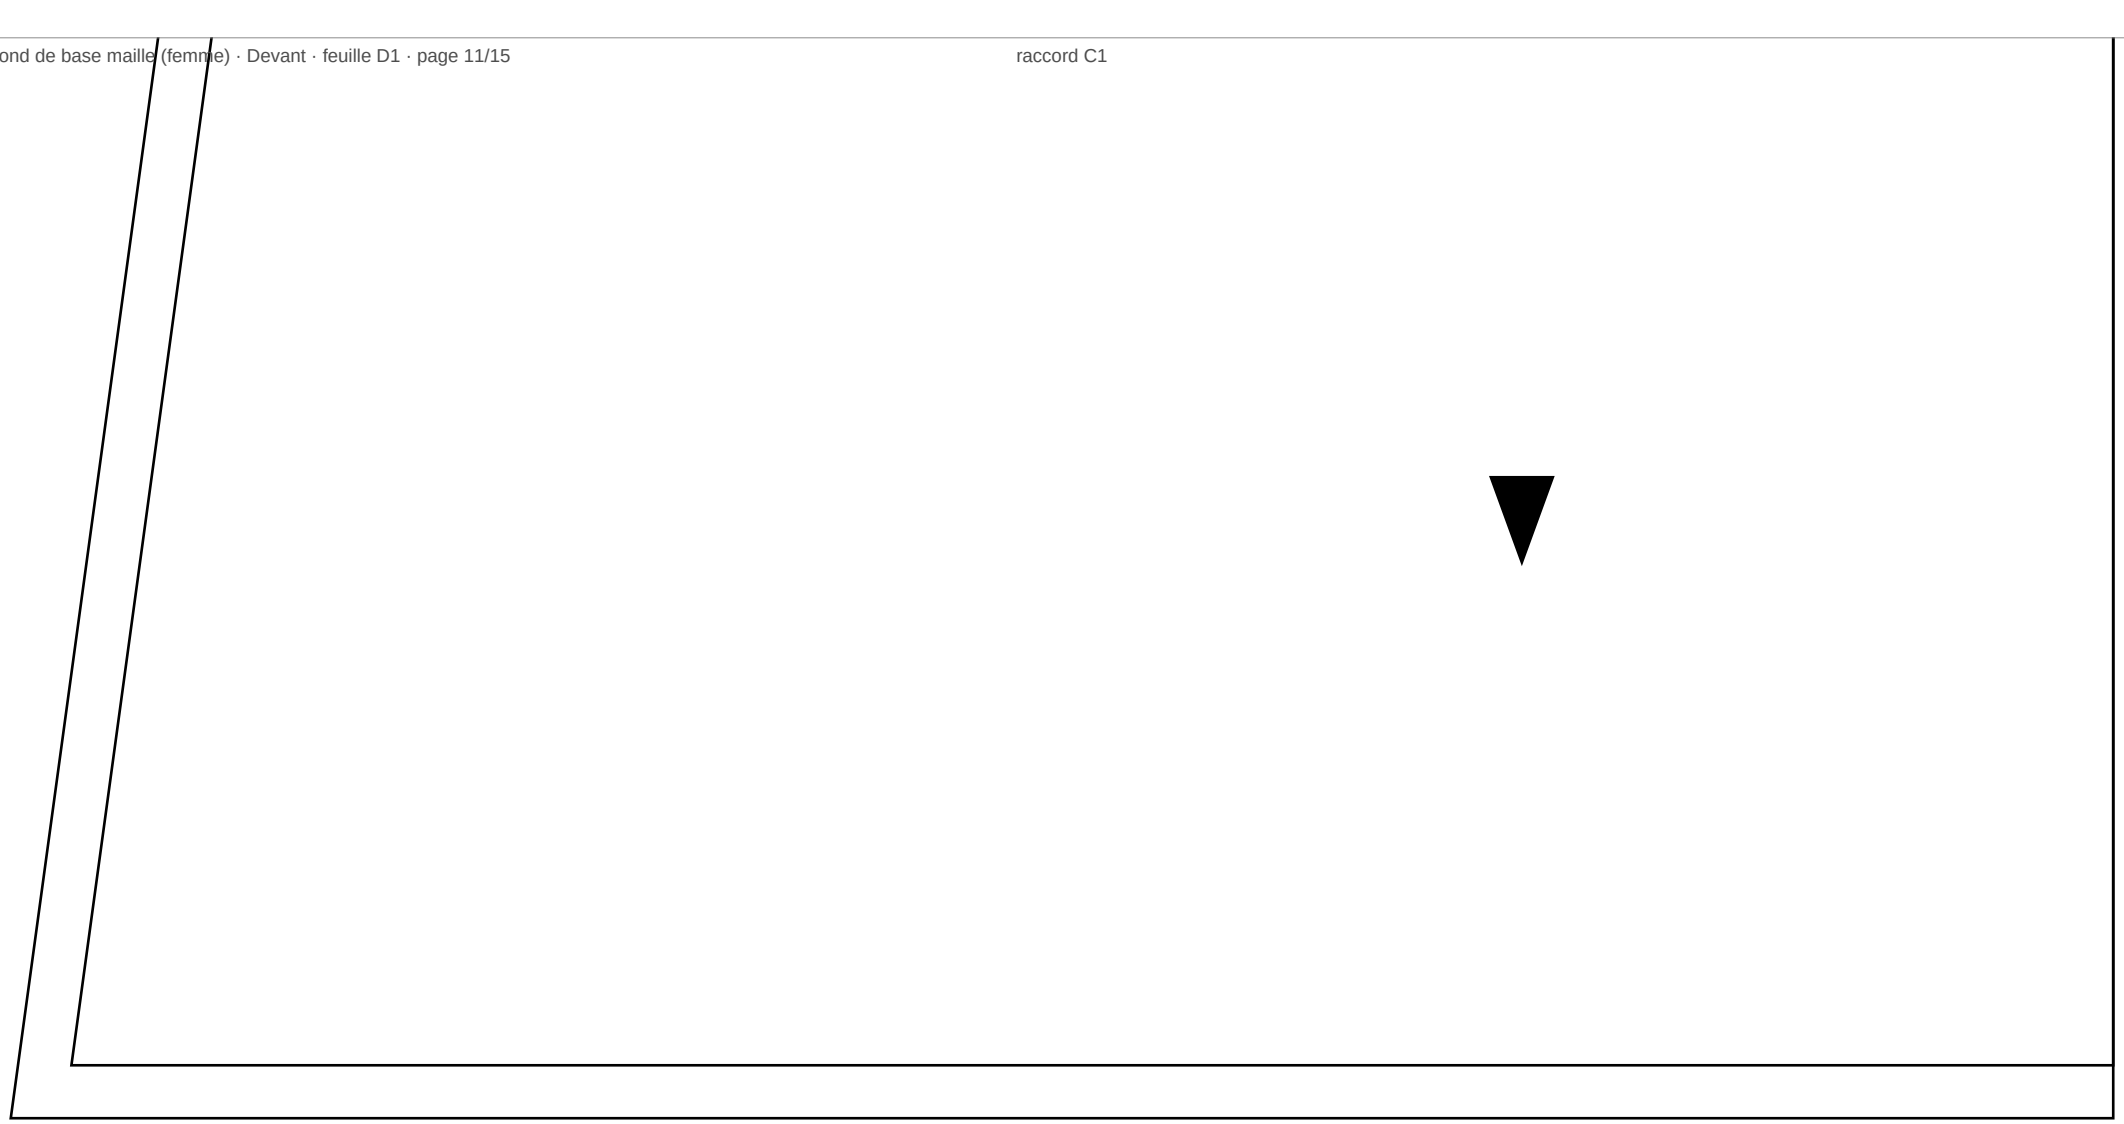

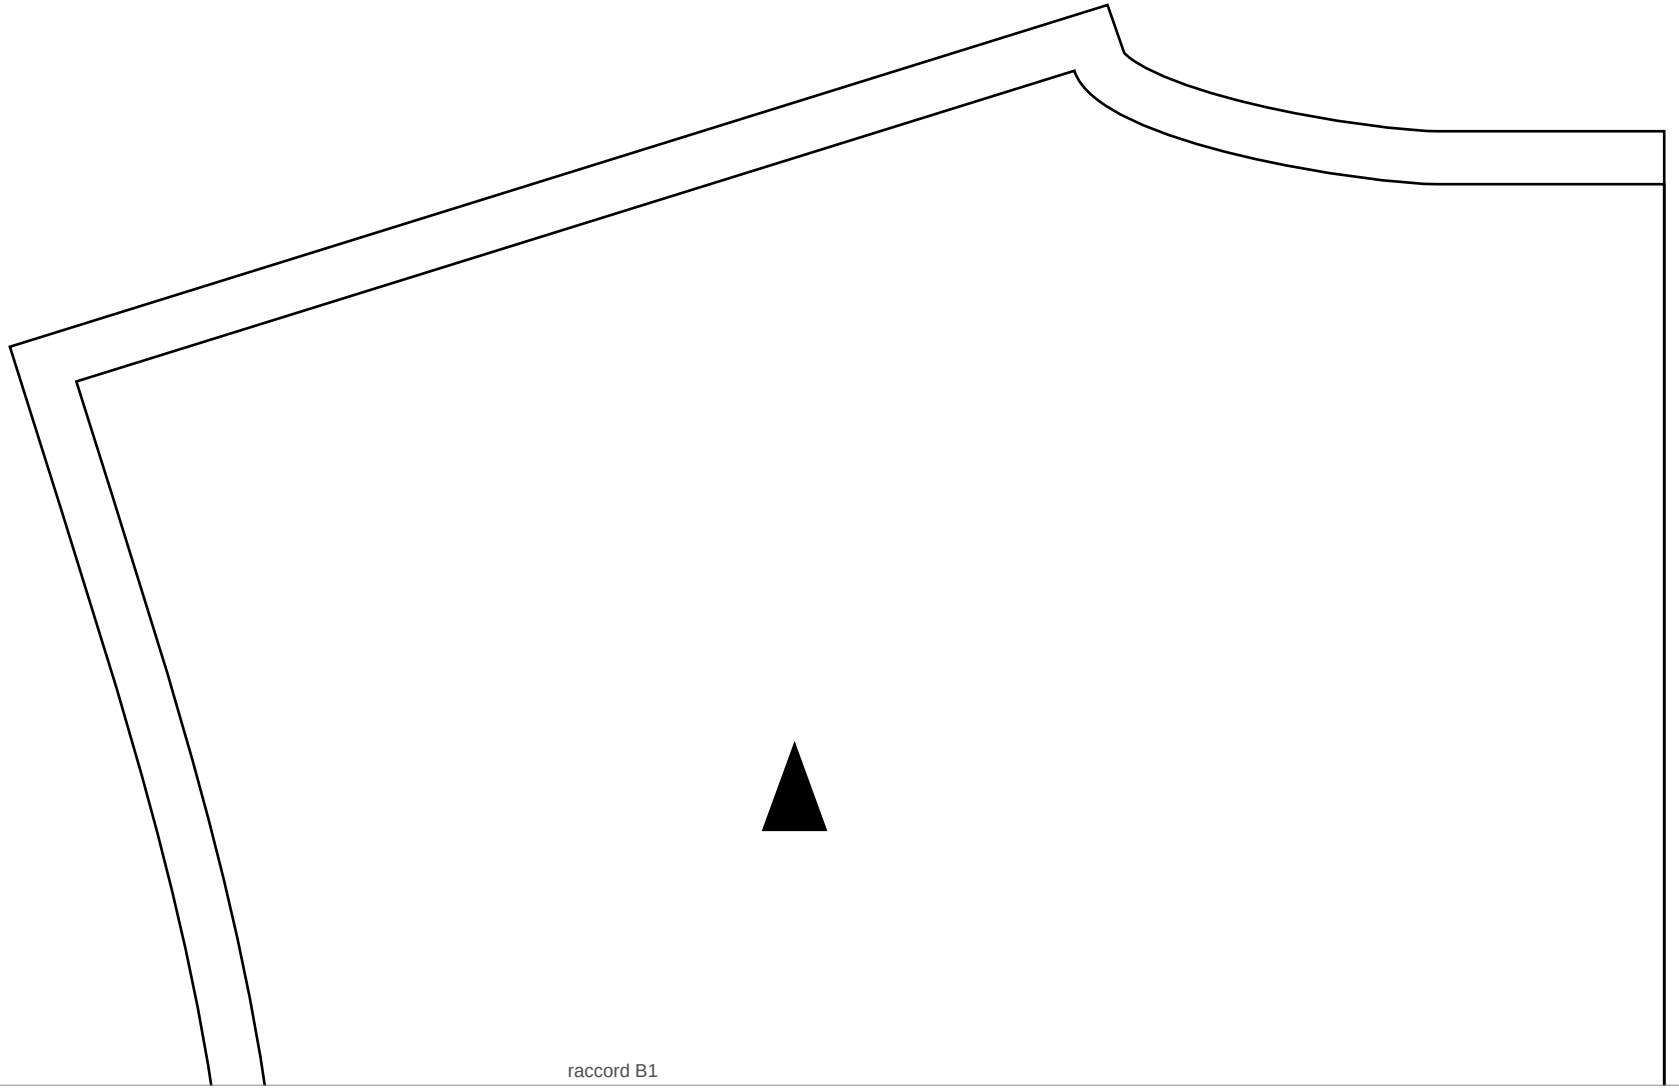

raccord B1

raccord A1

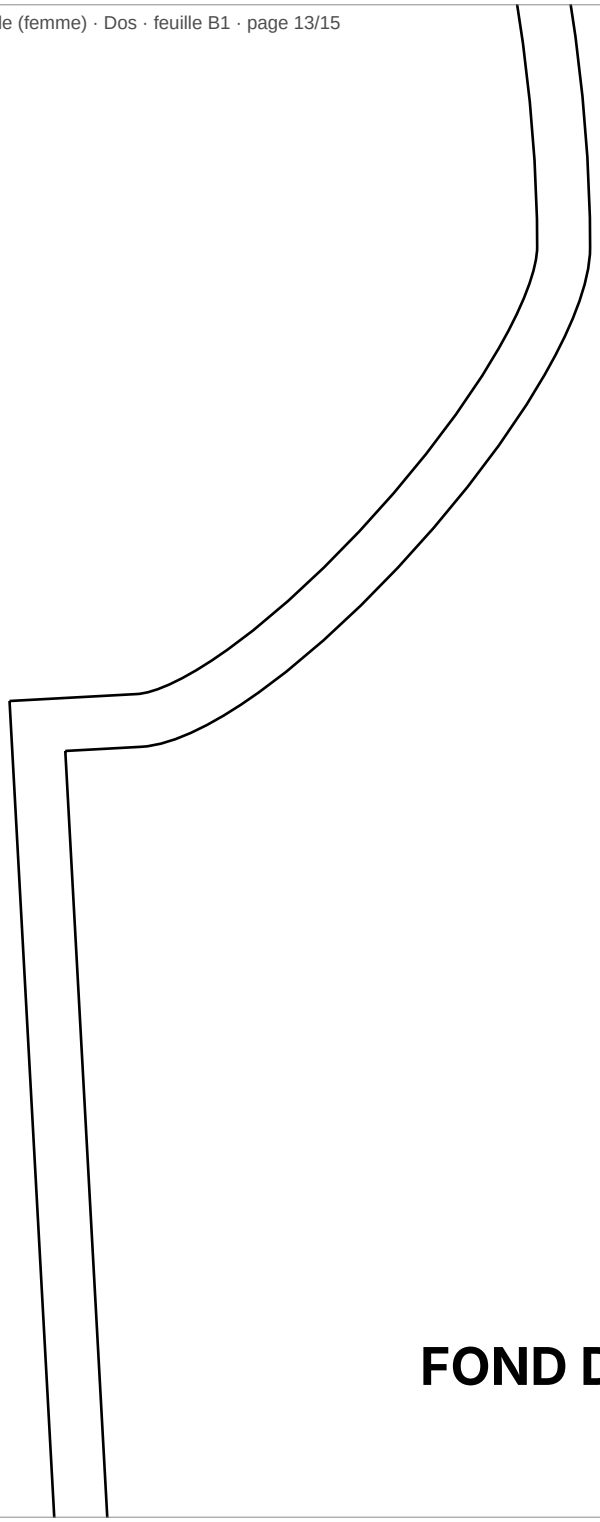

FOND DE BASE MAILLE

Base

T44

raccord C1

Dos

Tissu X1

raccord B1



raccord D1

raccord C1

