Fond de base maille (homme)

Taille 44 · Atelier AT


Carré 5×5

Imprimer à 100 % (« taille réelle », sans ajustement à la page). Vérifier le carré de contrôle ci-contre : 5 cm de côté. Chaque pièce a ses propres feuilles : couper chaque feuille sur le cadre gris là où elle touche une voisine, puis scotcher bord à bord selon le plan (lettre = rangée, chiffre = colonne), en prolongeant les repères en biais d'une feuille à l'autre ; les deux moitiés de losange noir doivent former un losange entier. Tracé extérieur : ligne de coupe, coutures de 0,7 cm comprises ; tracé intérieur : ligne de couture.


Pièces et assemblages (14 feuilles A4)

Manche (couper 2 fois (en symétrie)) : 6 feuilles portrait, 7 raccords, pages 2 à 7
Devant (couper 1 fois au pli) : 4 feuilles paysage, 3 raccords, pages 8 à 11
Dos (couper 1 fois au pli) : 4 feuilles paysage, 3 raccords, pages 12 à 15


Manche

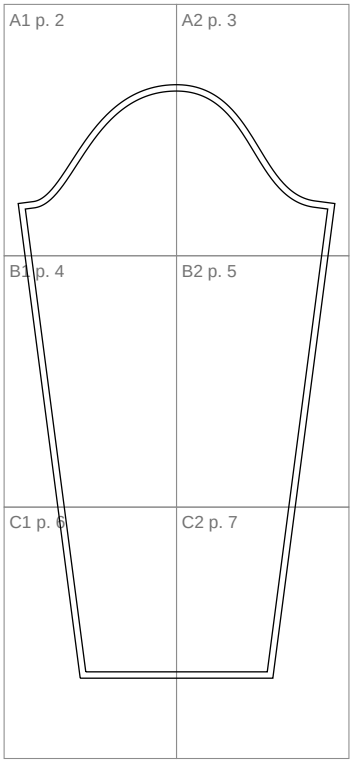


Devant

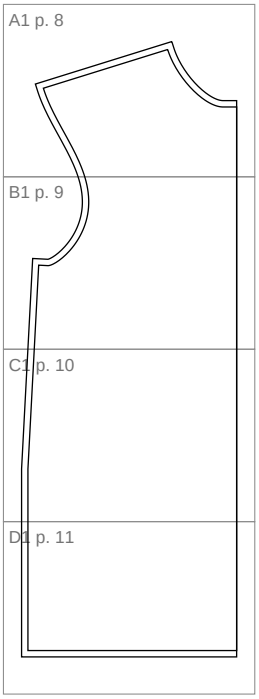


Dos

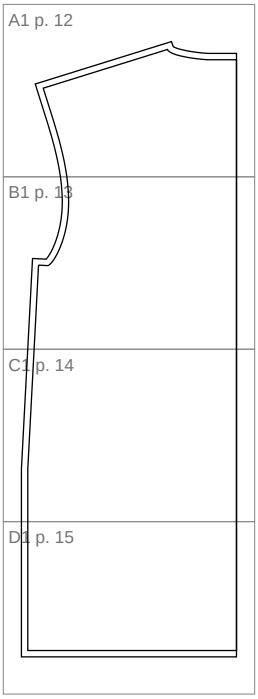

A1
page 2/15

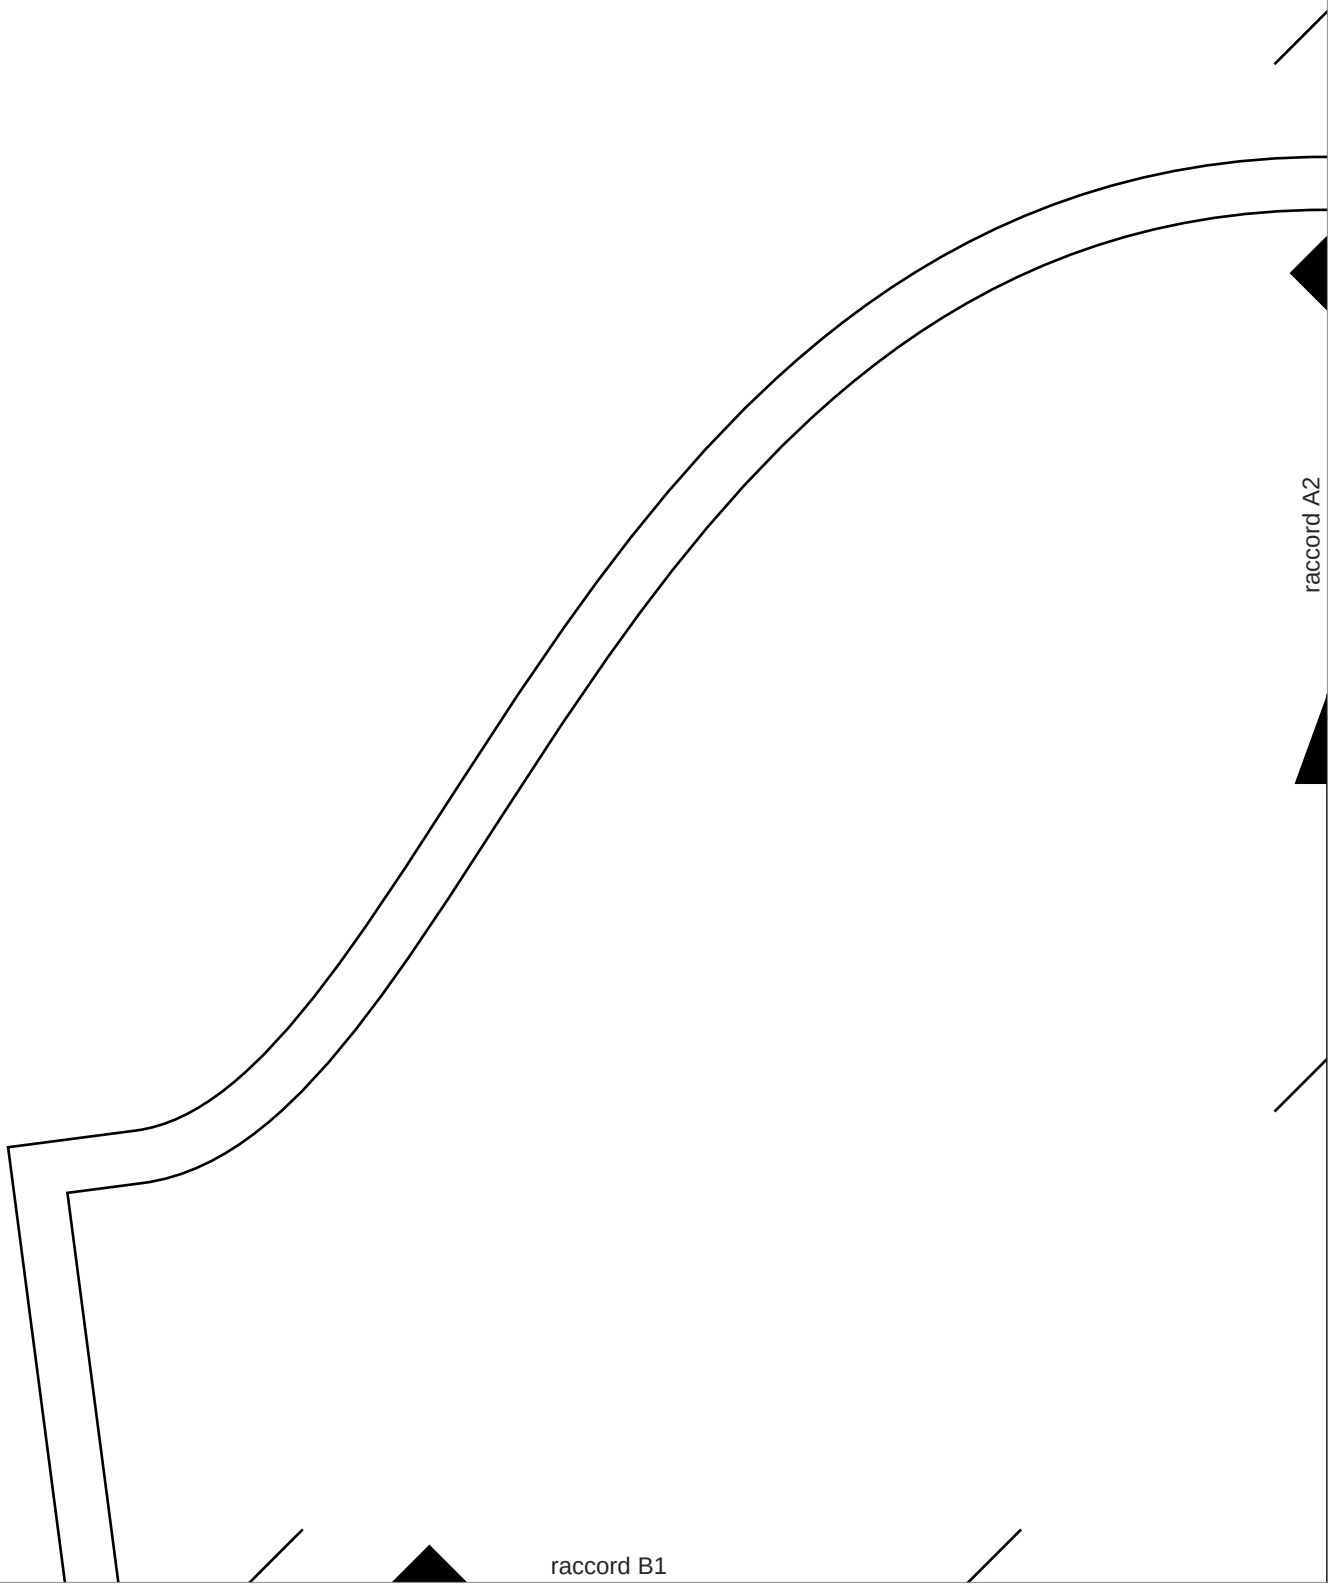

A2
page 3/15

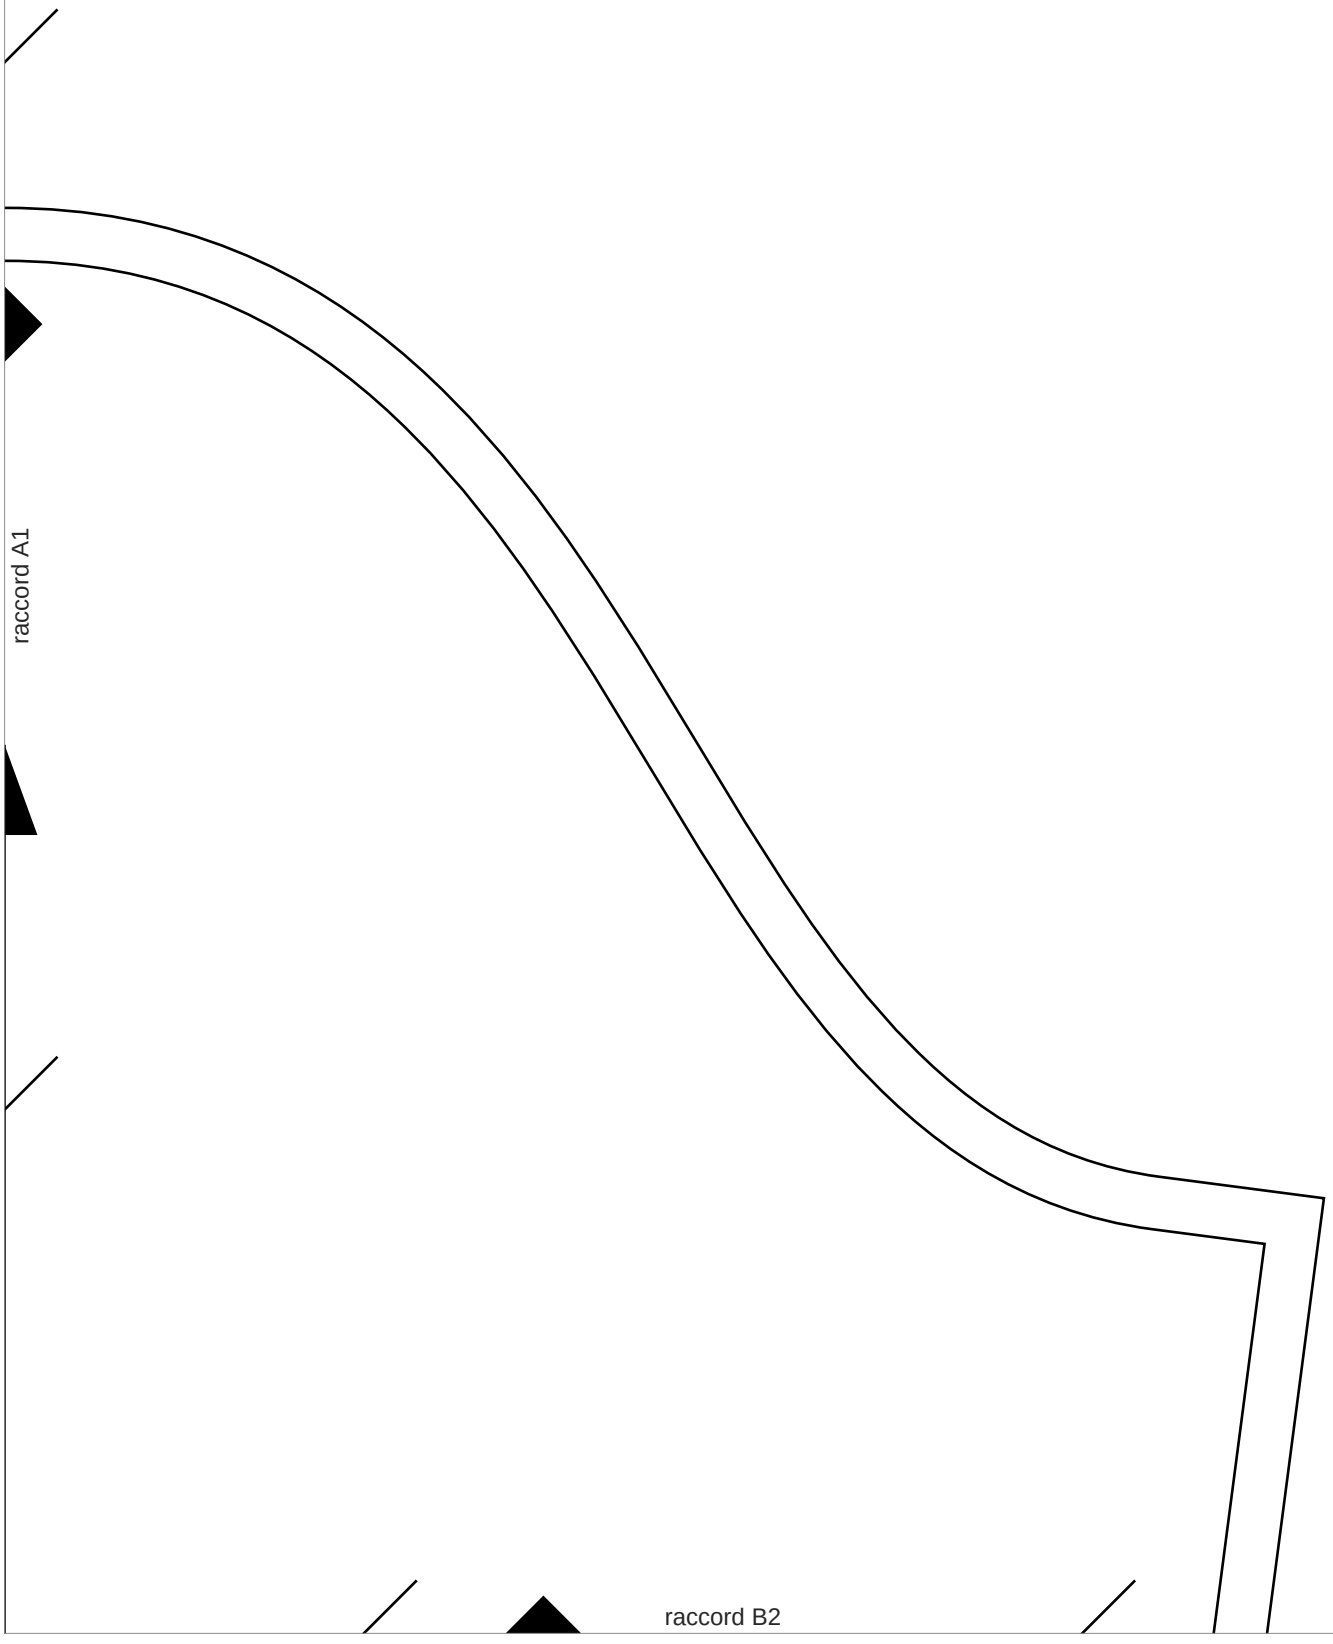

raccord A1

B1

page 4/15

FOND DE BASE MAILLE

Base

T44

Droit fil

raccord B2

raccord C1

raccord A2

B2

page 5/15

Ma...he

Tissu X2


raccord B1

raccord C2

raccord B1

C1


page 6/15

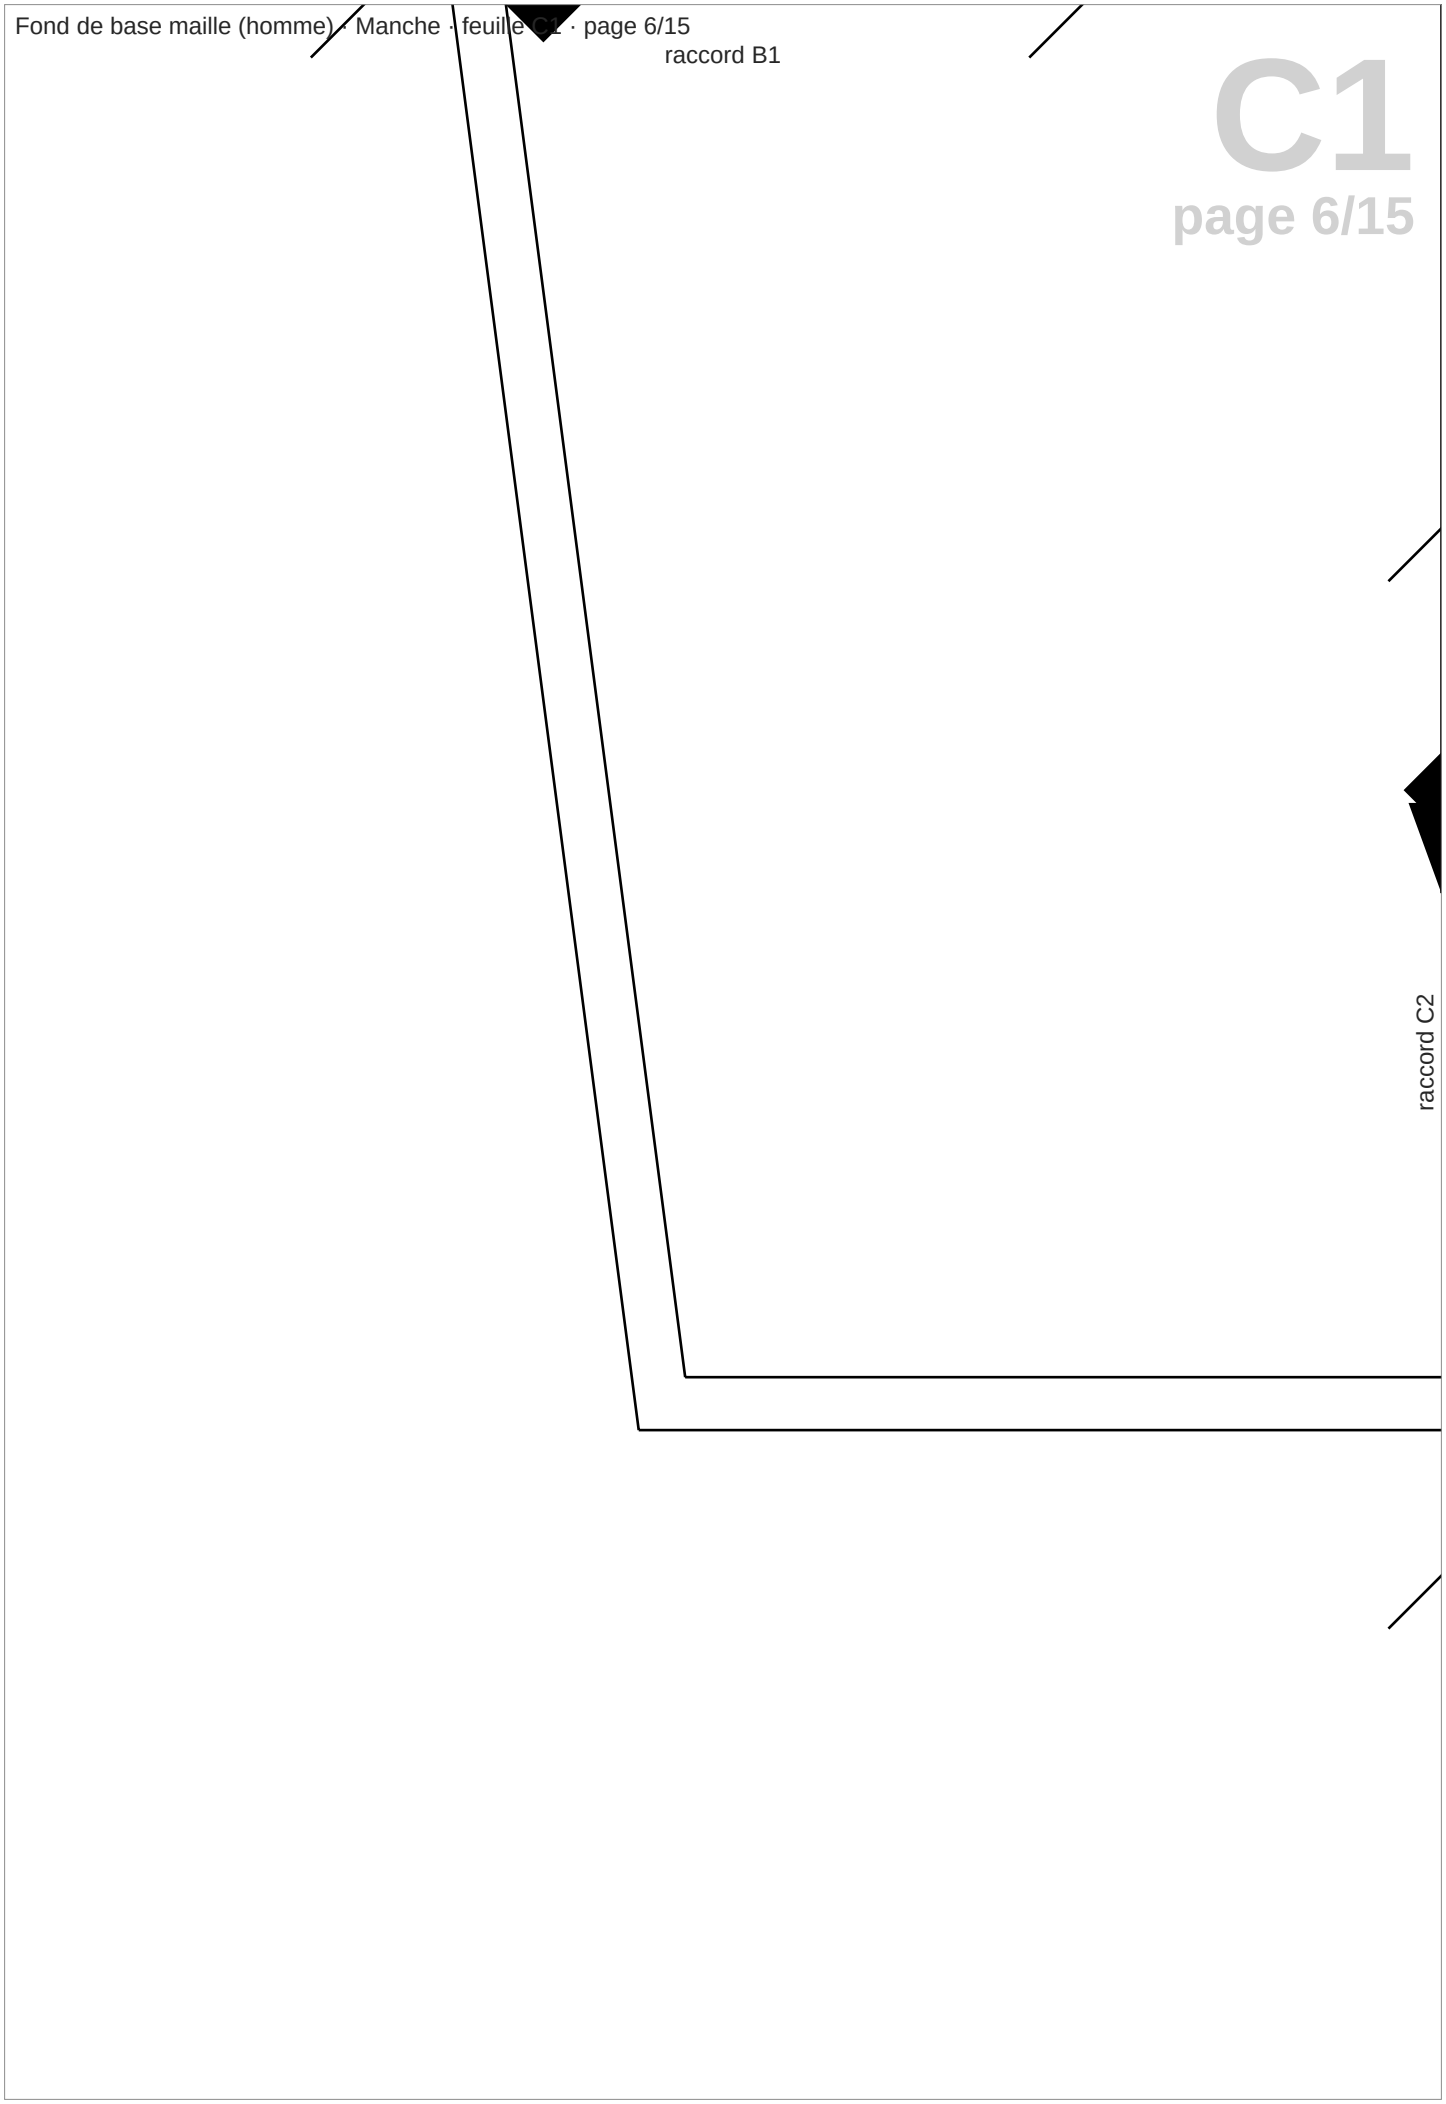


raccord B2

C2

page 7/15

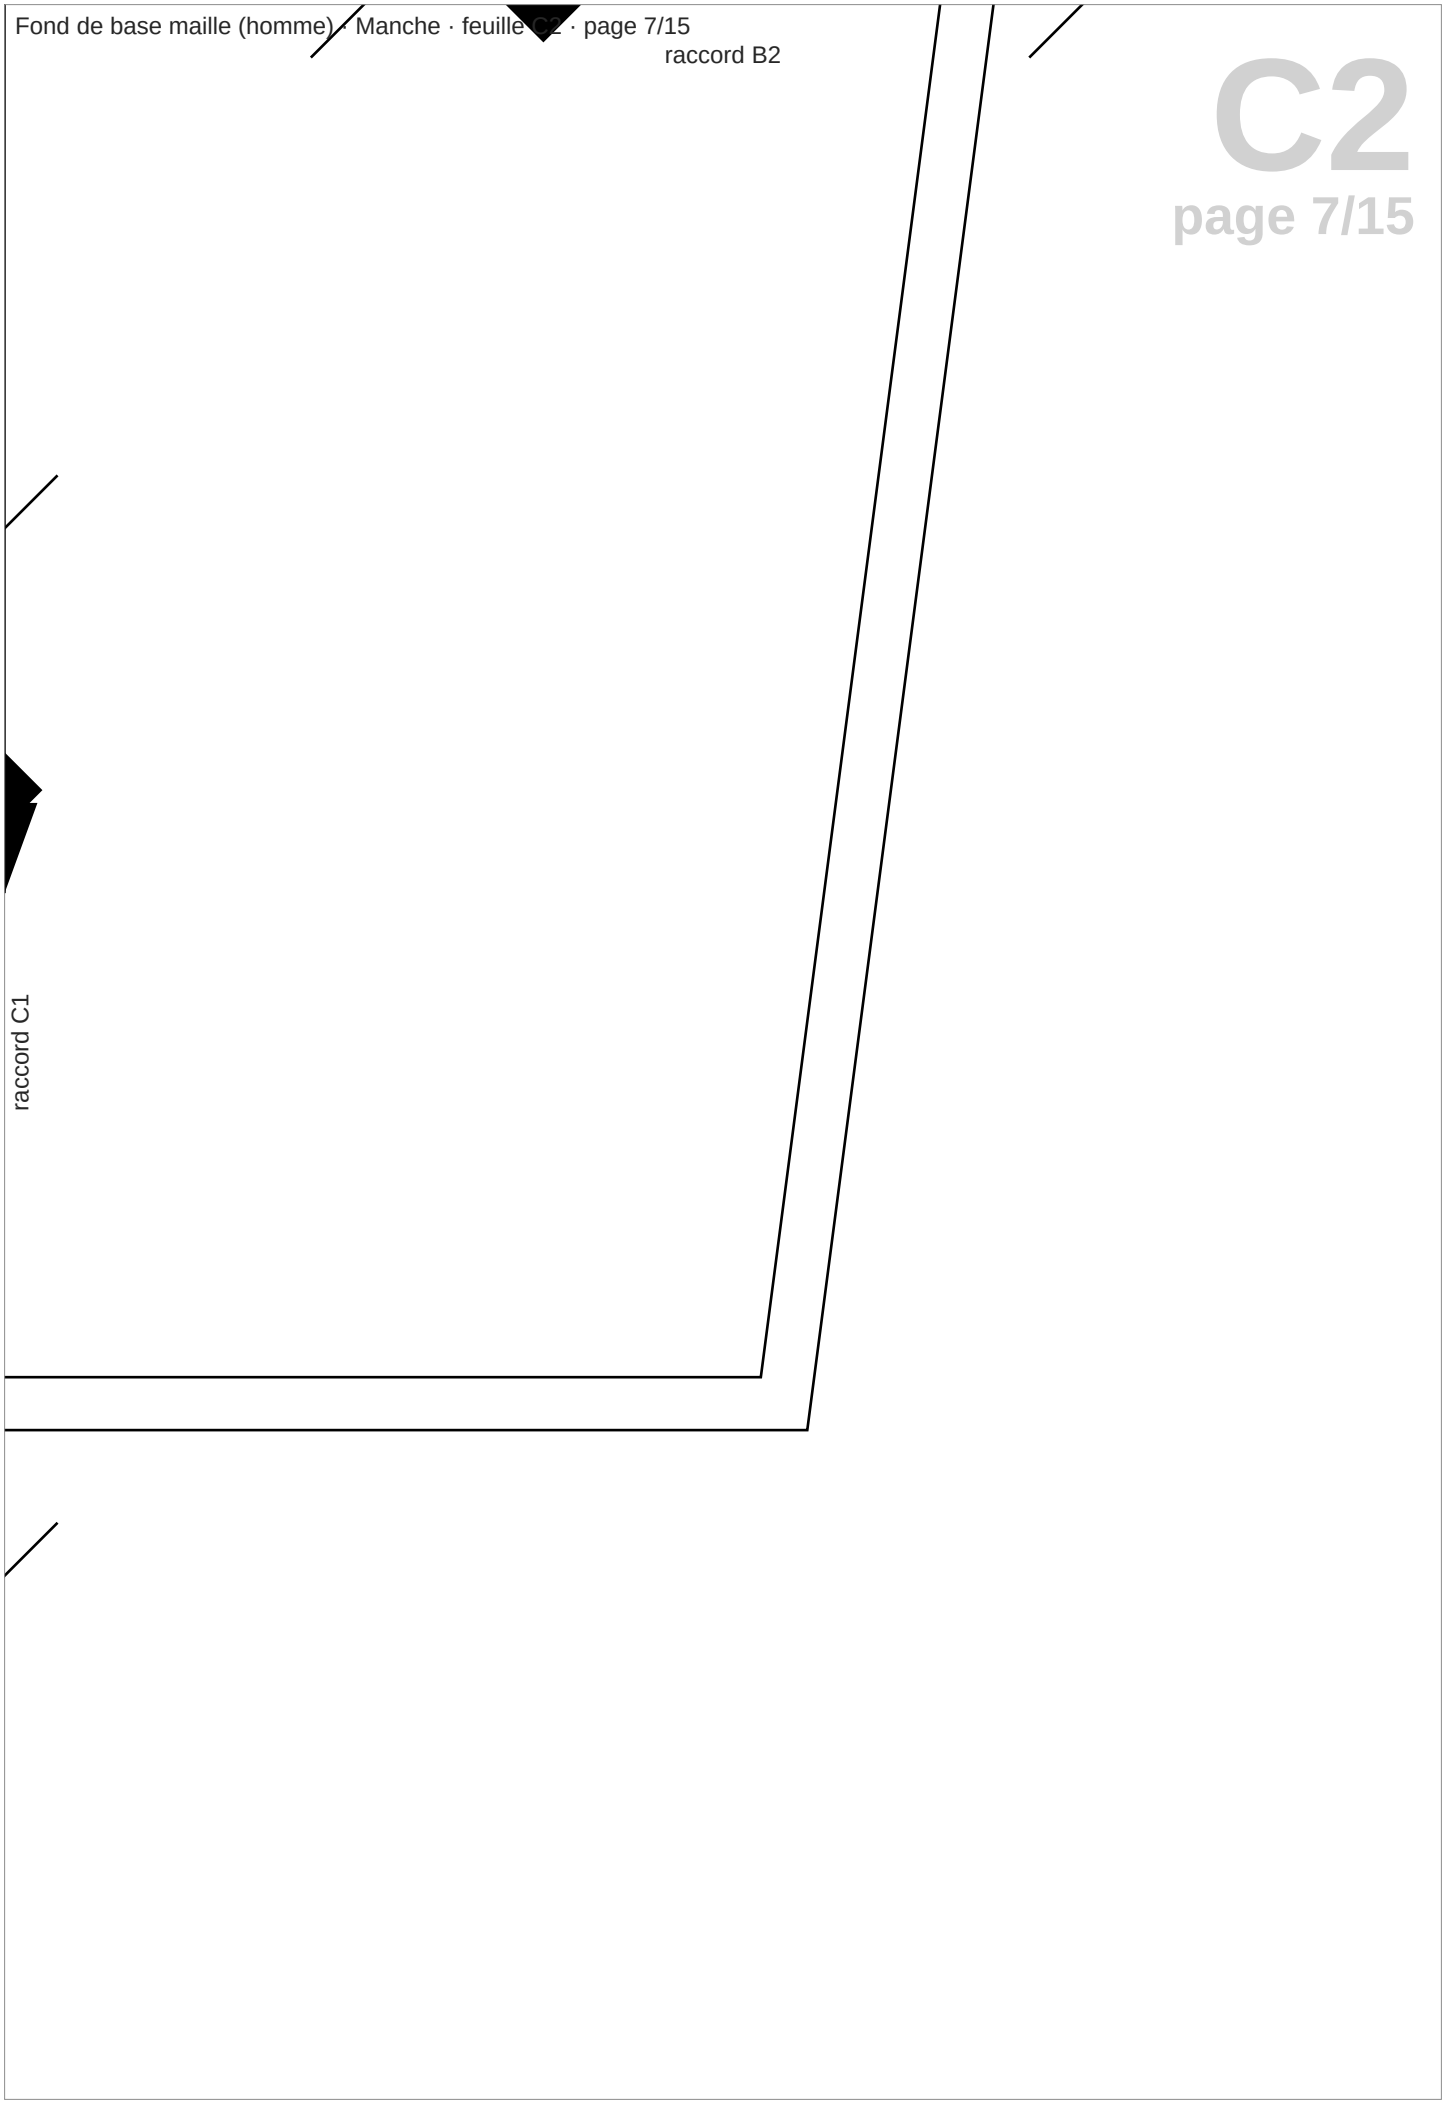

A1
page 8/15

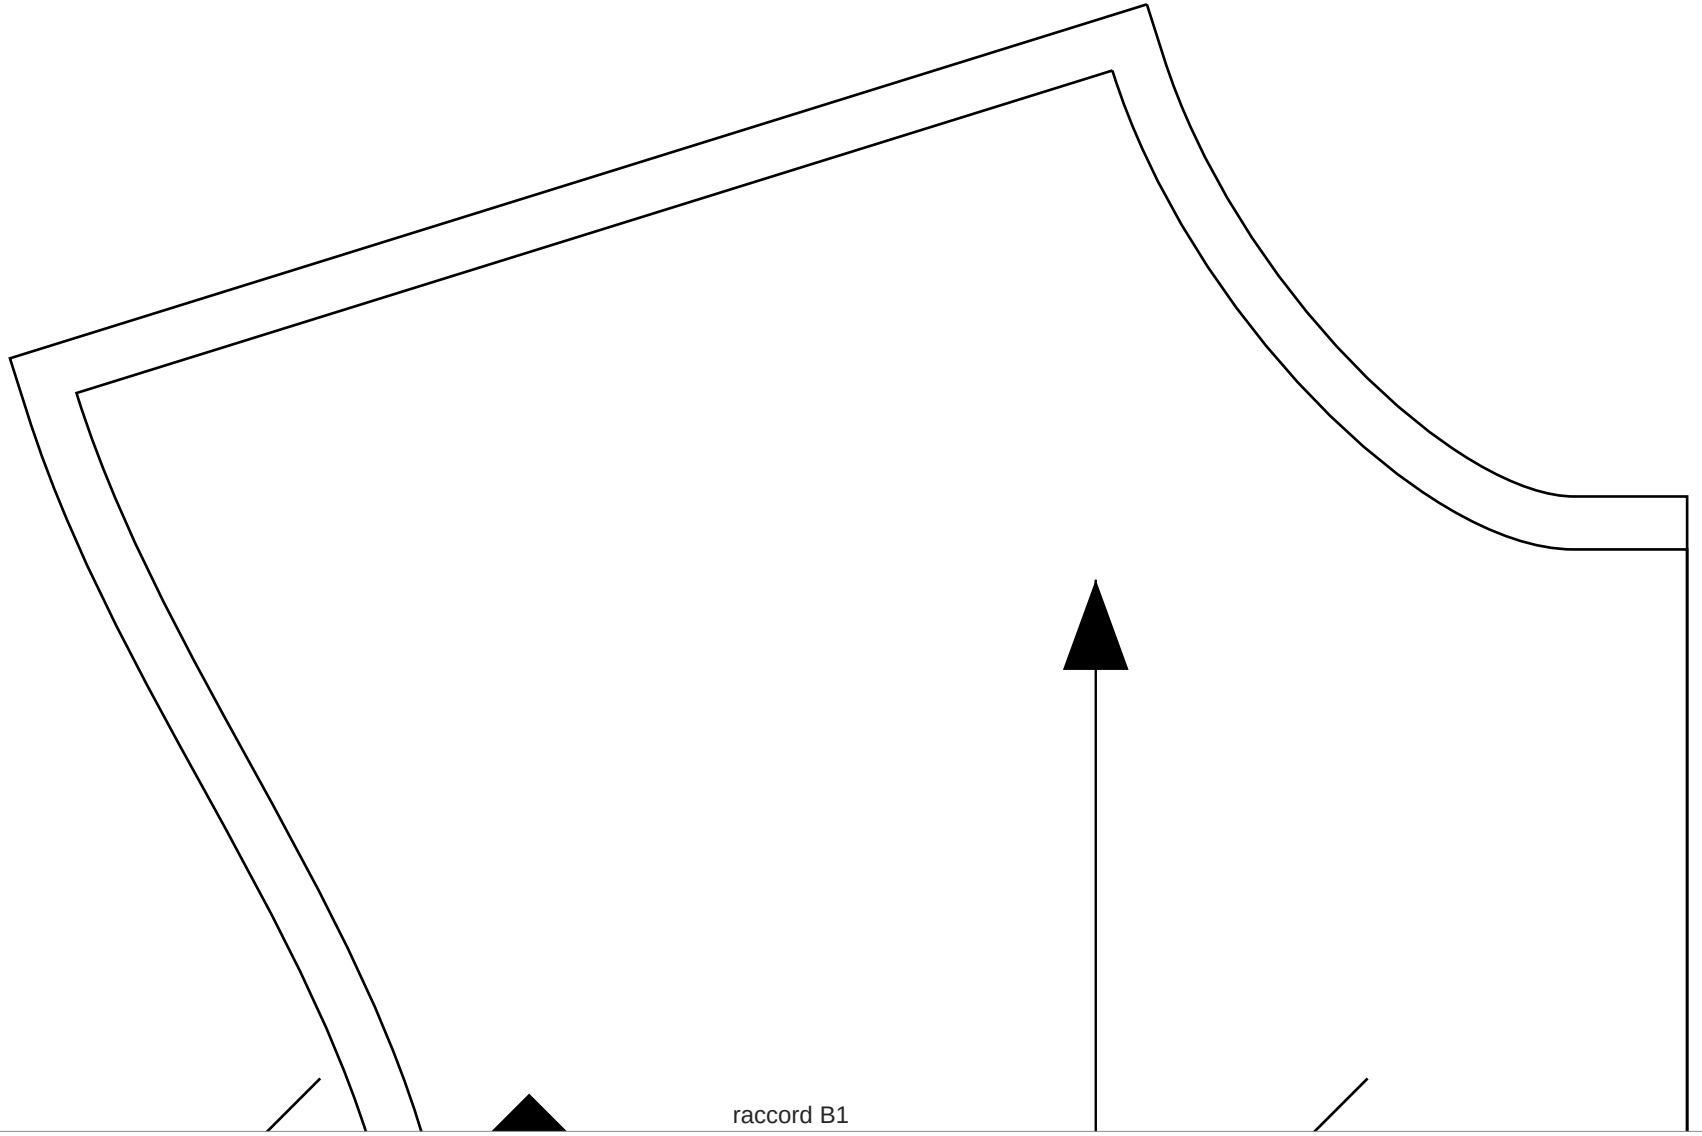

raccord A1

B1
page 9/15

FOND DE BASE MAILLE

Base

T44

raccord C1

t fil


Devant
Tissu X1

raccord B1


Droi

C1


page 10/15

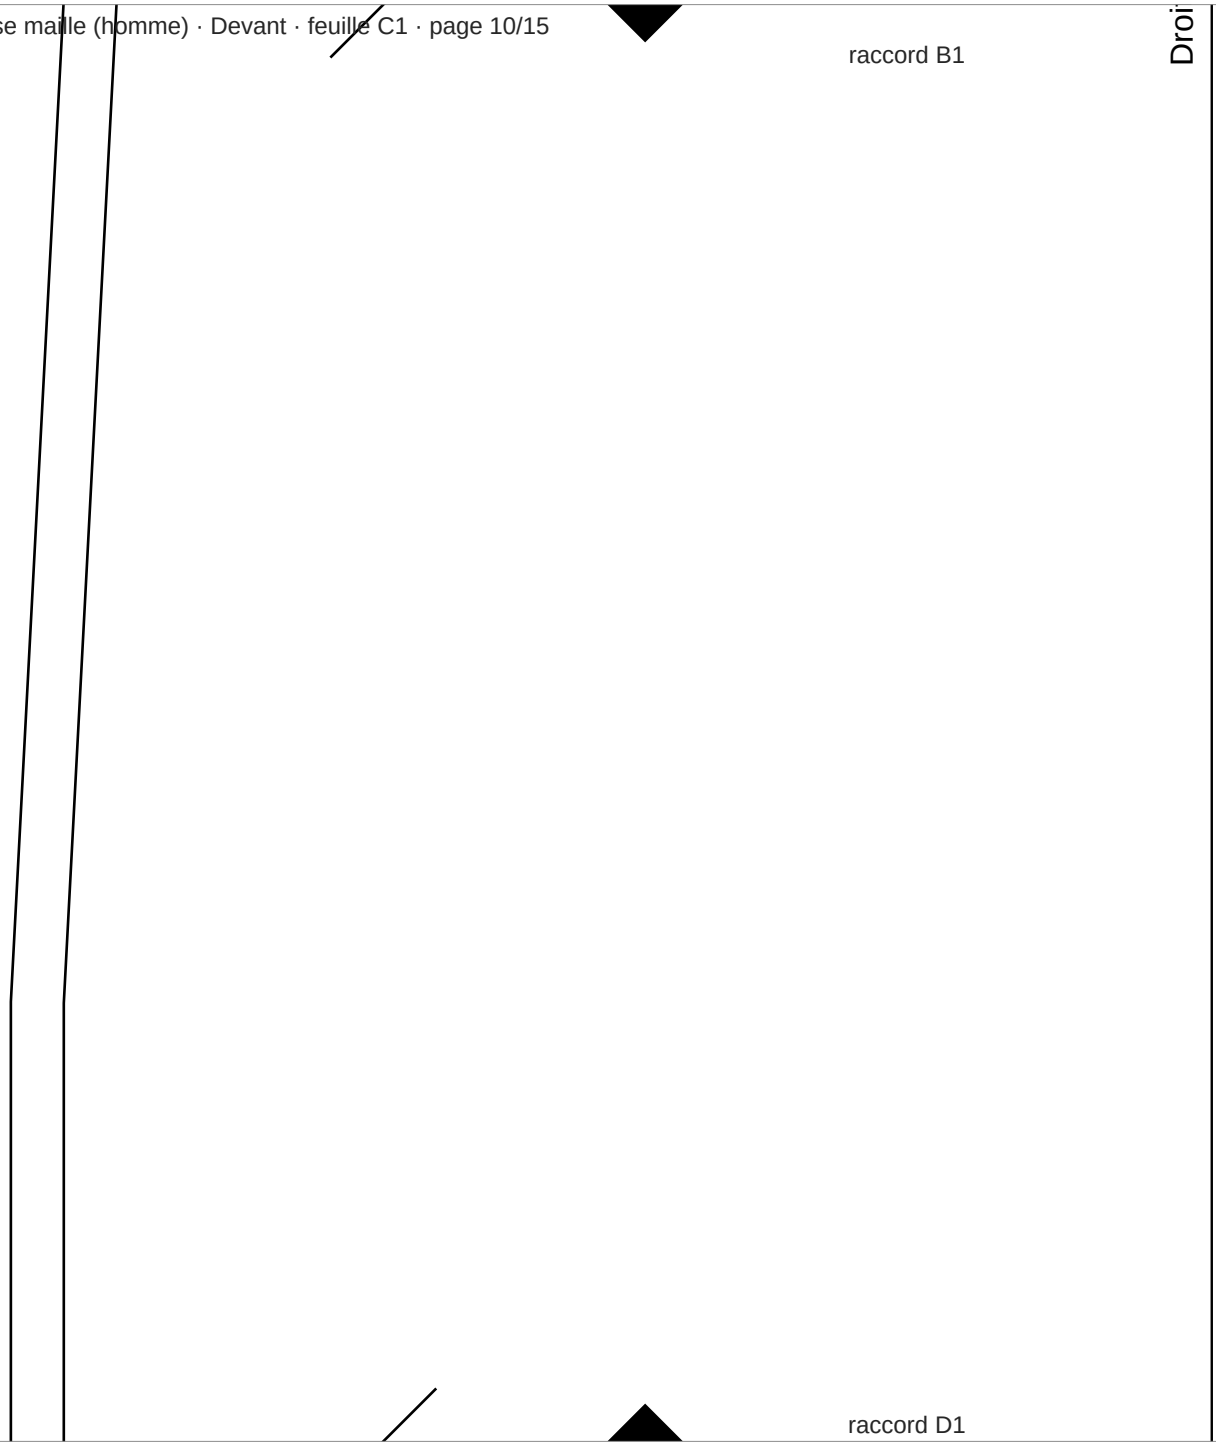

raccord D1

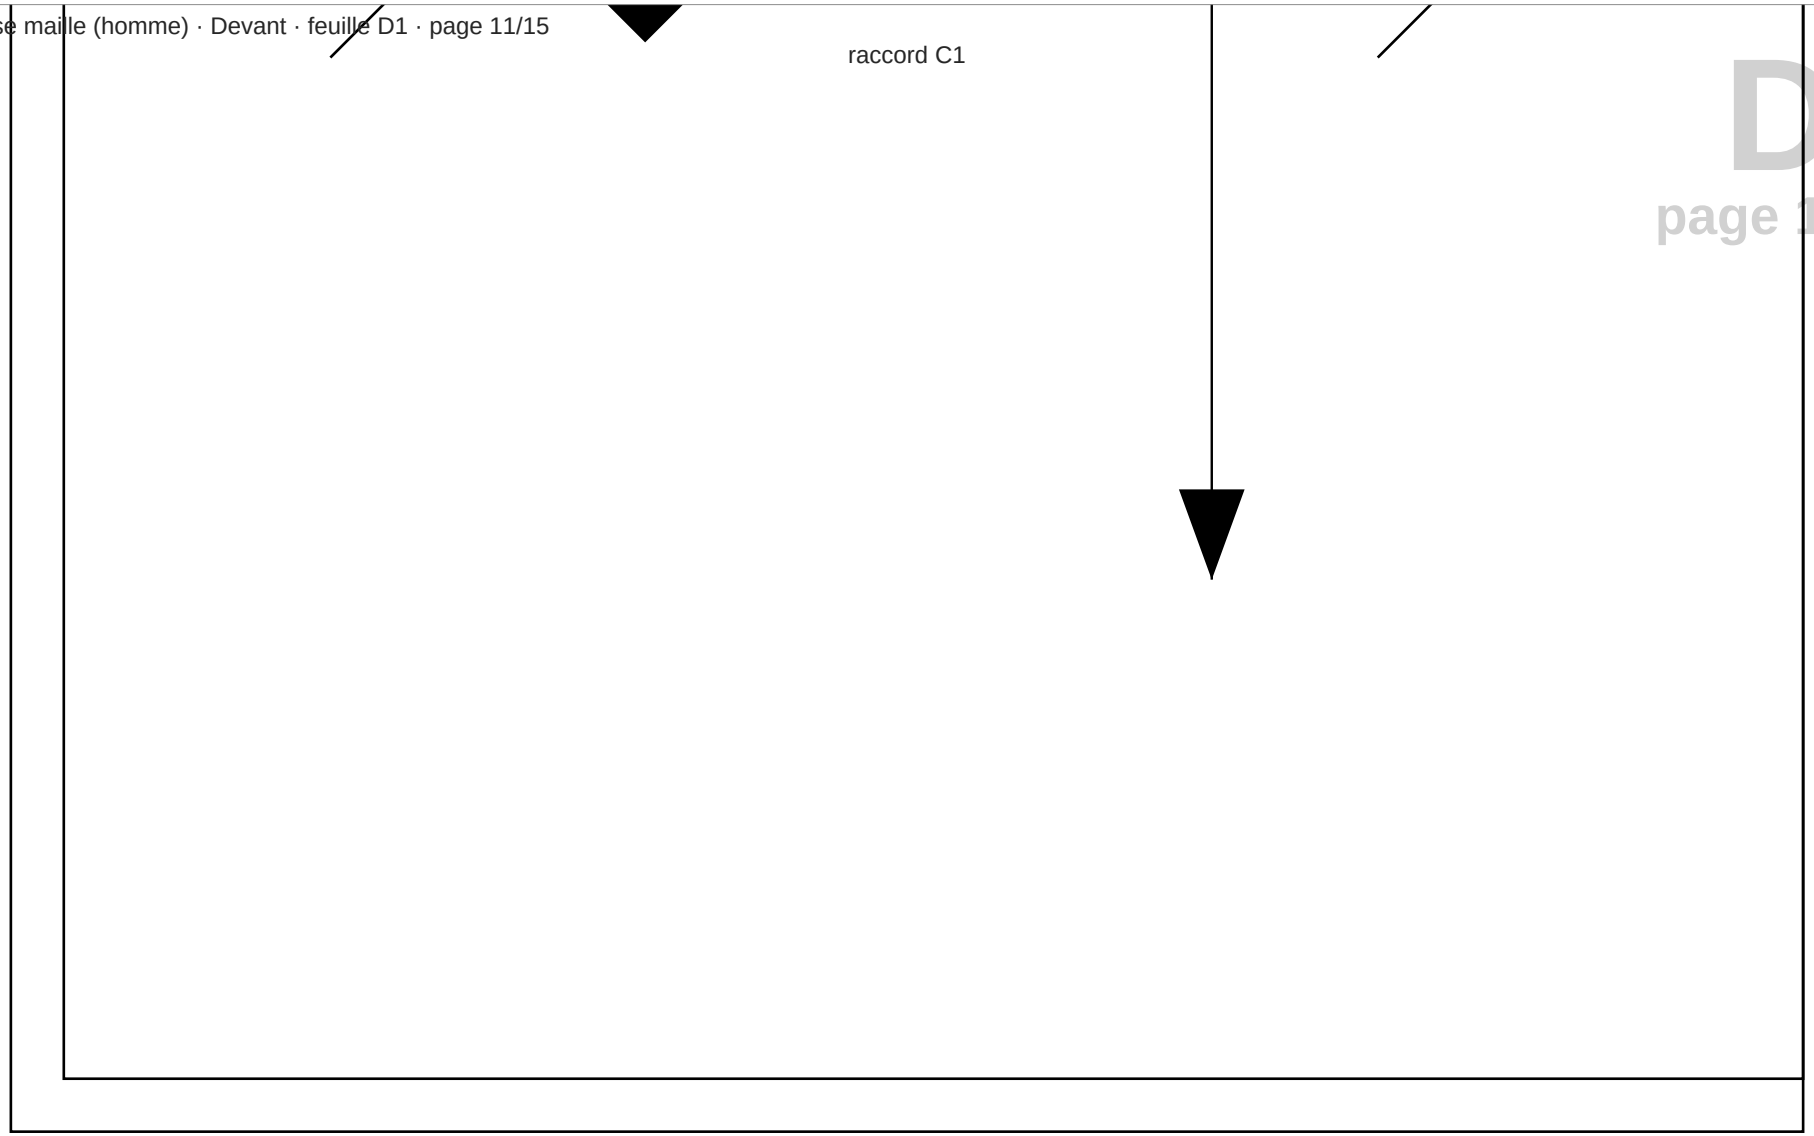
raccord C1

A1
page 12/15

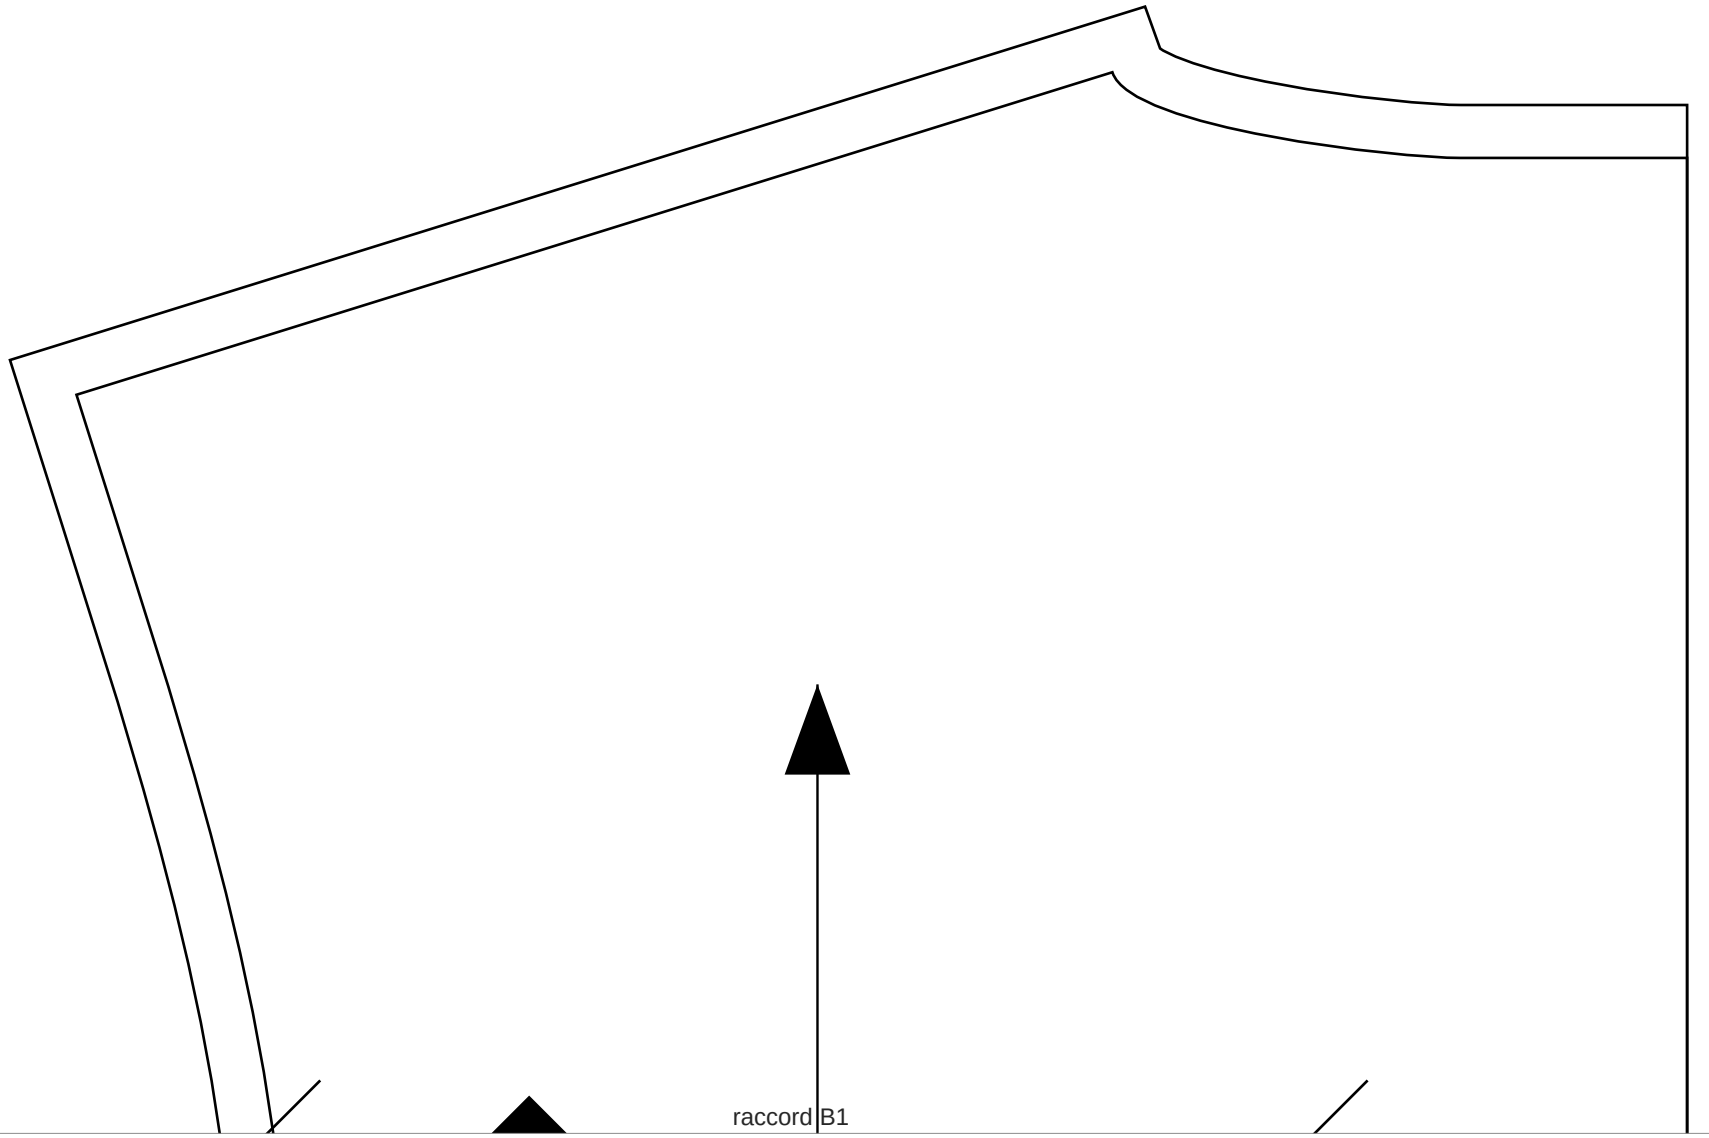

raccord A1

B1

page 13/15

FOND DE BASE MAILLE


Base

T44


Dos

Tissu X1

raccord C1

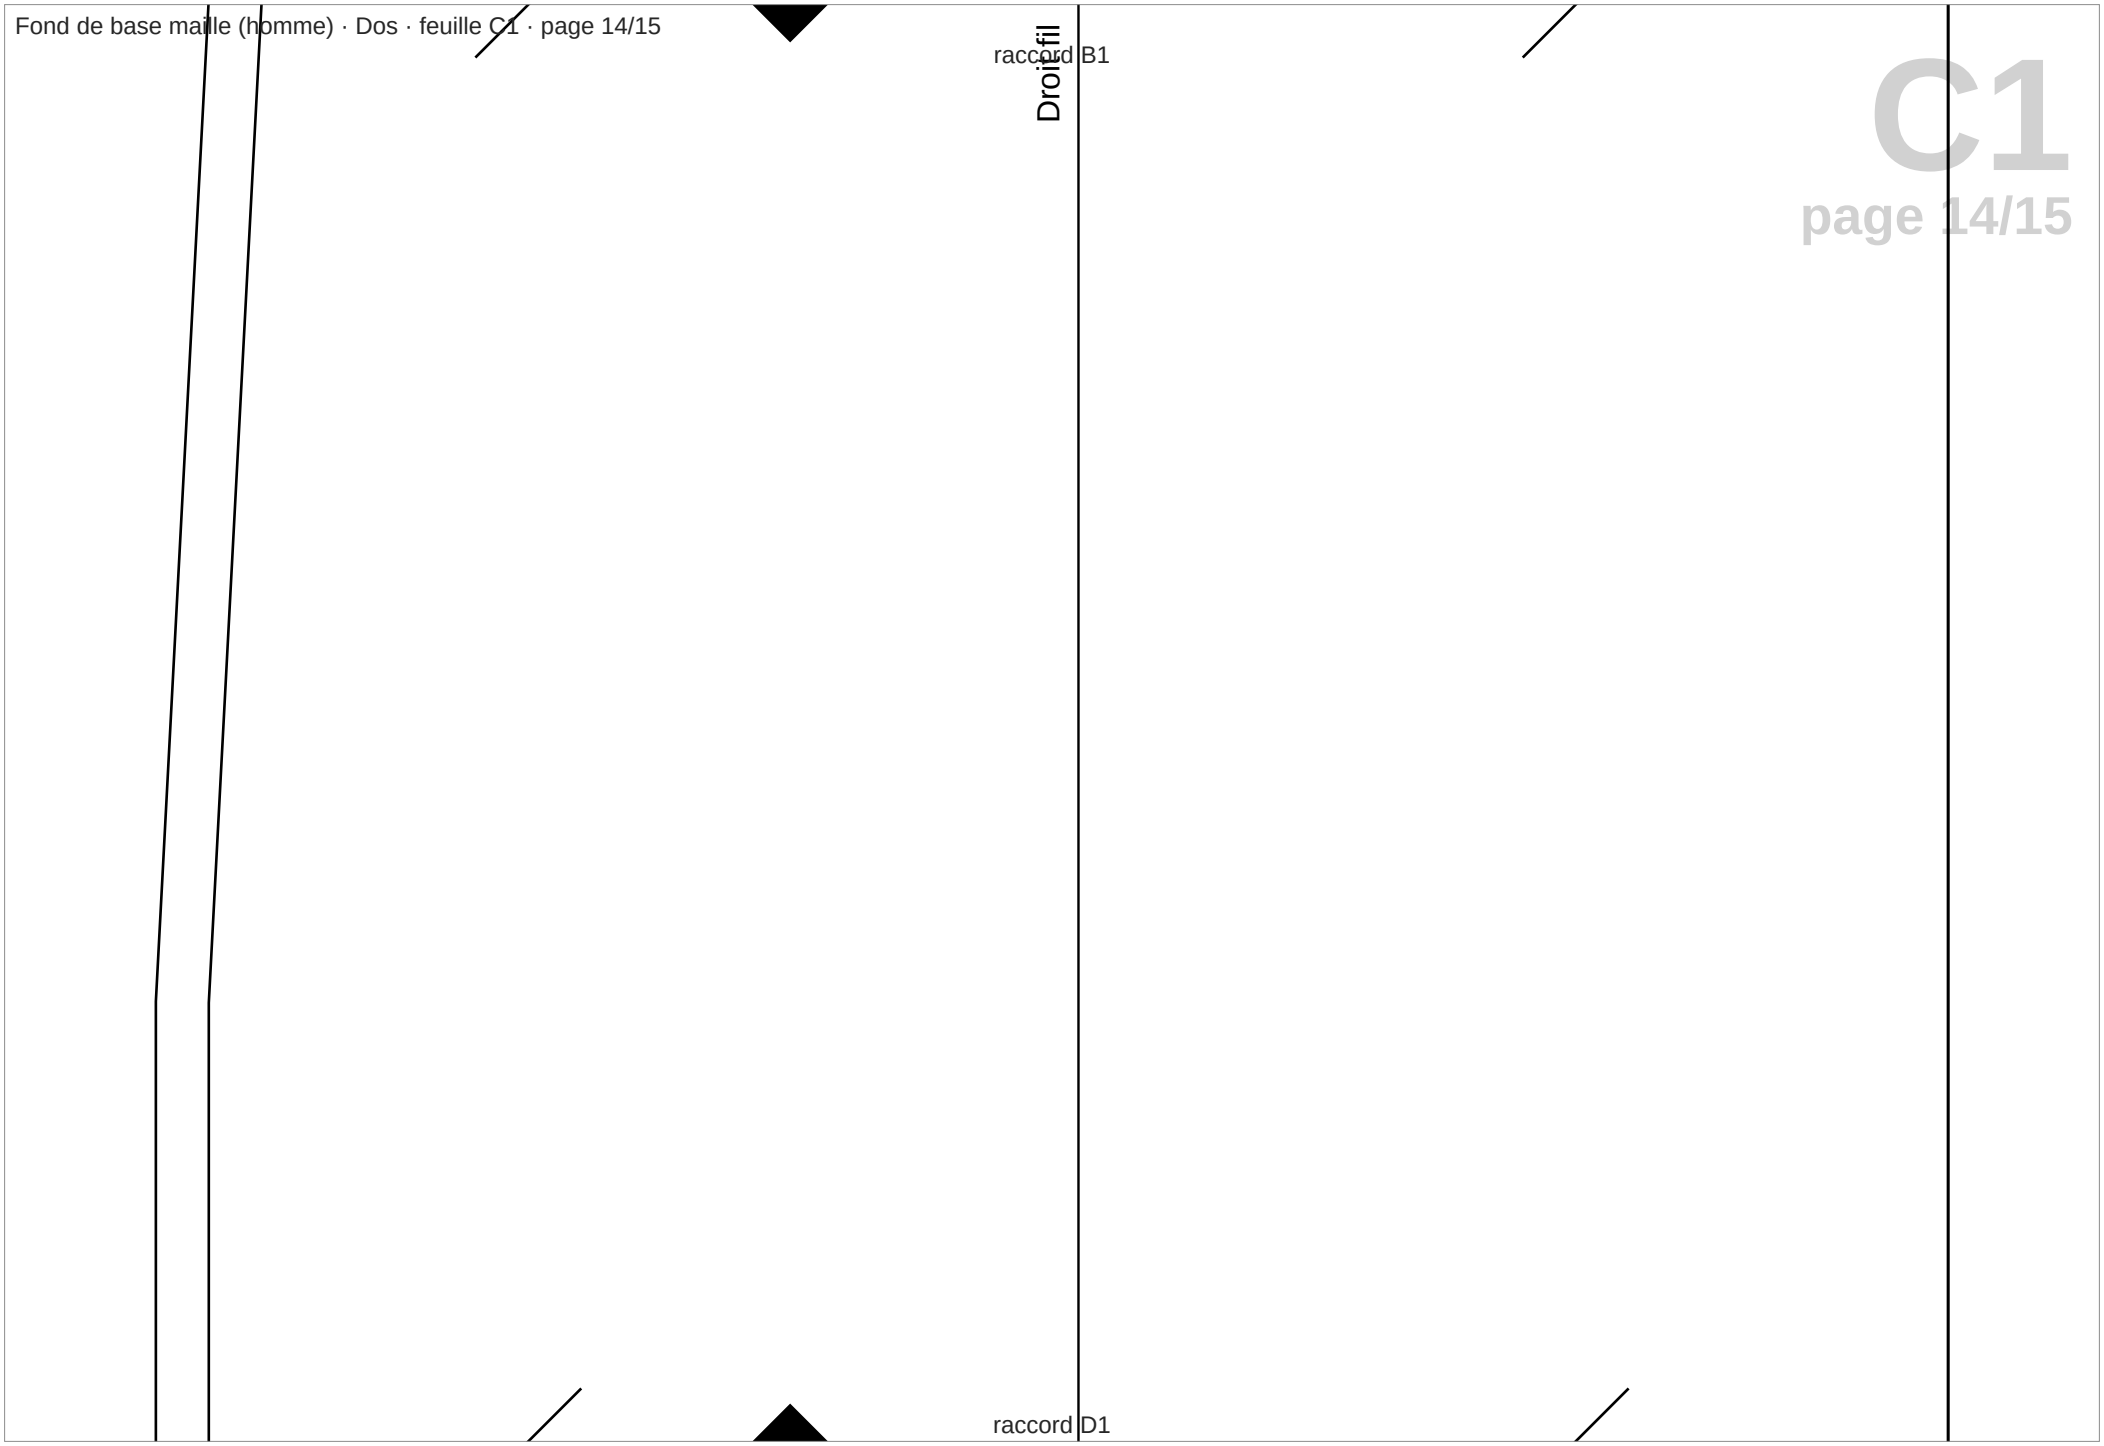

C1
page 14/15

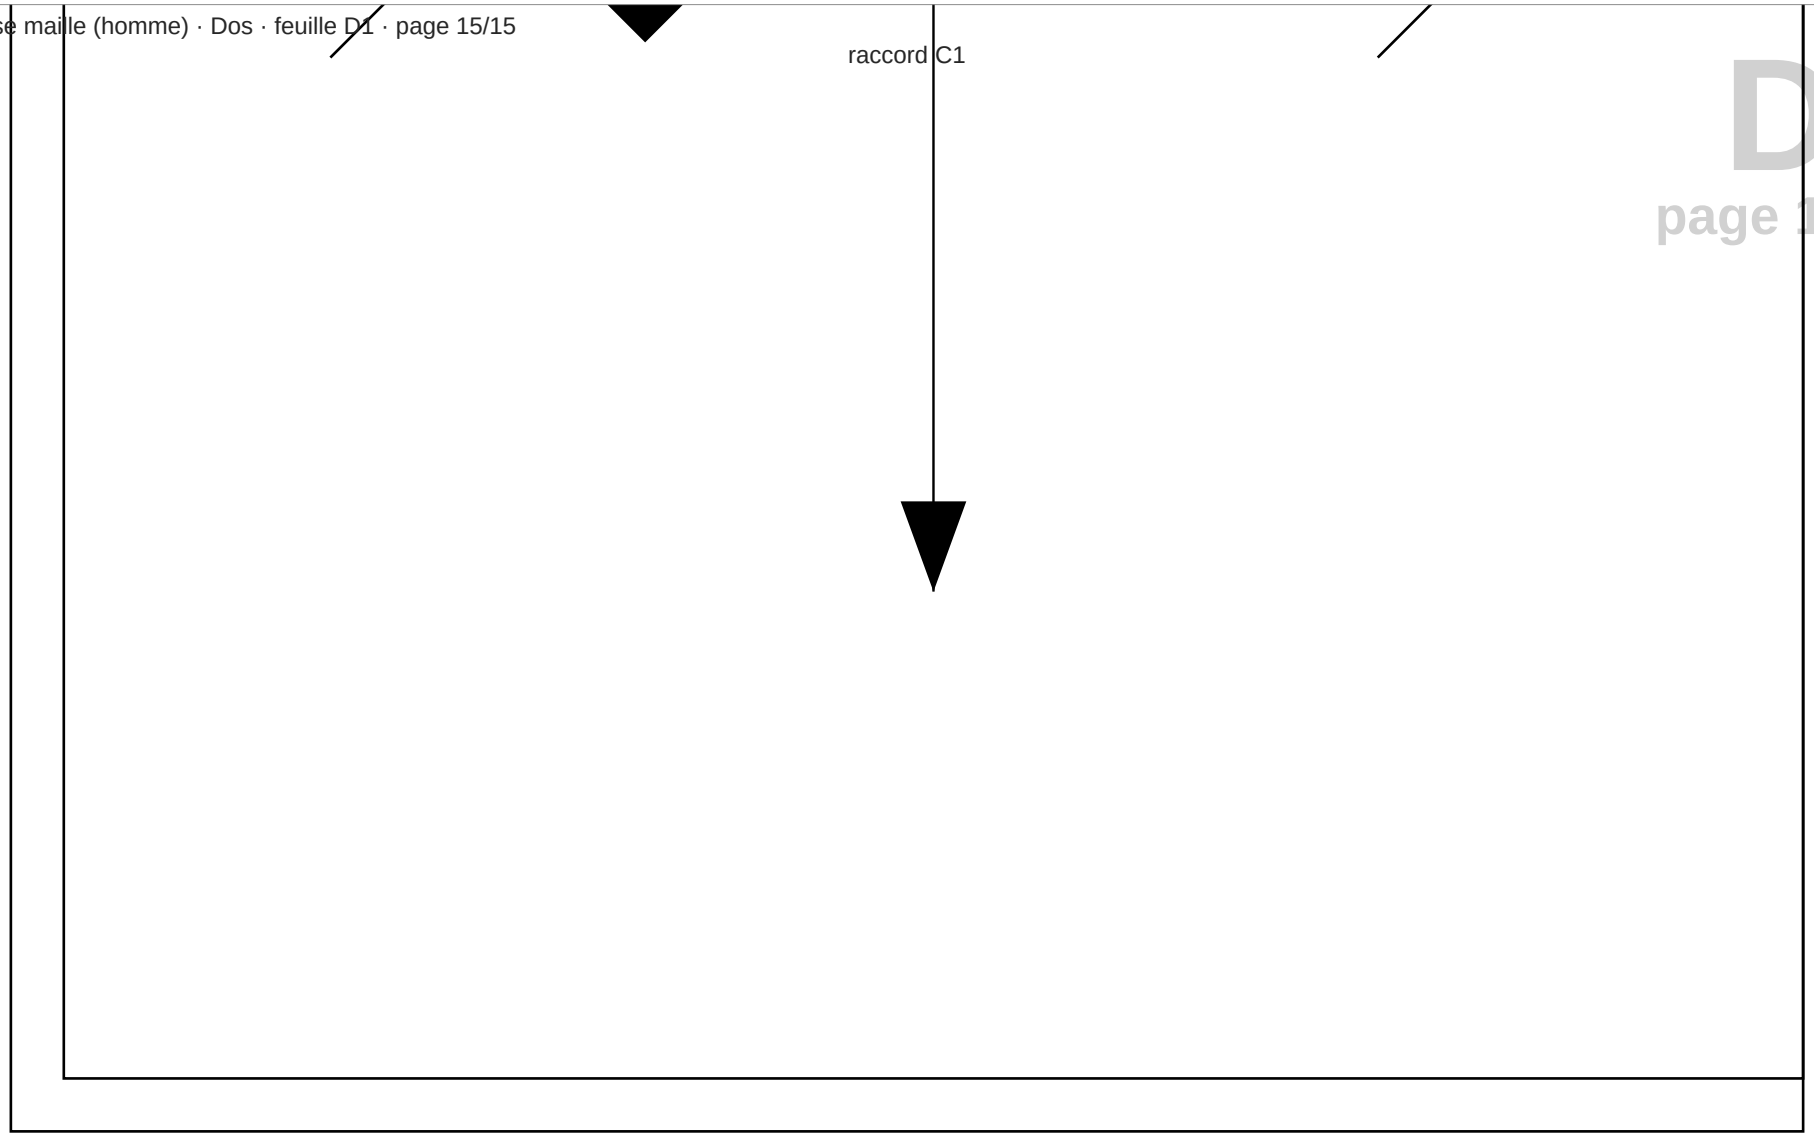
raccord C1