Fond de base maille (homme)

Taille 44 · tracé et export Seamly2D

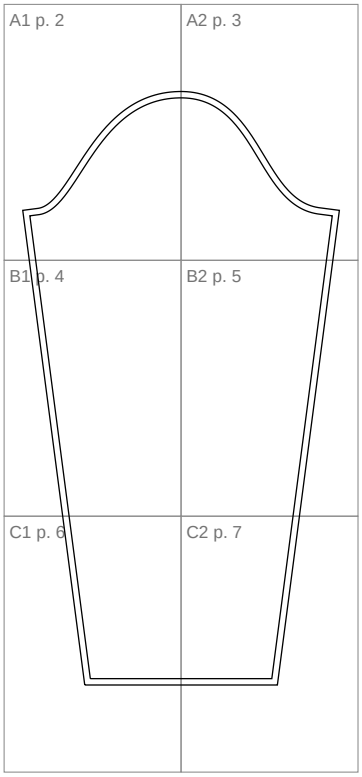
Carré 5×5

Imprimer à 100 % (« taille réelle », sans ajustement à la page). Vérifier le carré de contrôle ci-contre : 5 cm de côté. Chaque pièce a ses propres feuilles : couper chaque feuille sur le cadre gris là où elle touche une voisine, puis scotcher bord à bord selon le plan (lettre = rangée, chiffre = colonne), en prolongeant les repères en biais d'une feuille à l'autre. Tracé extérieur : ligne de coupe, coutures de 0,7 cm comprises ; tracé intérieur : ligne de couture.

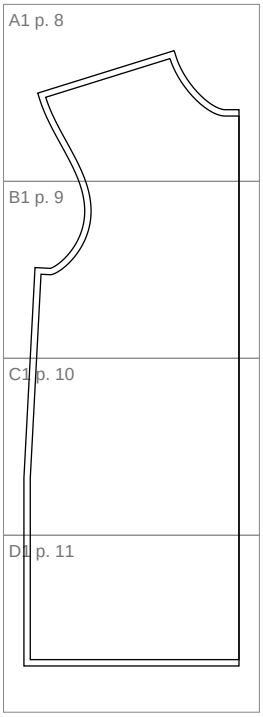
Pièces et assemblages (14 feuilles A4)

Manche (couper 2 fois (en symétrie)) : 6 feuilles portrait, 7 raccords, pages 2 à 7
Devant (couper 1 fois au pli) : 4 feuilles paysage, 3 raccords, pages 8 à 11
Dos (couper 1 fois au pli) : 4 feuilles paysage, 3 raccords, pages 12 à 15

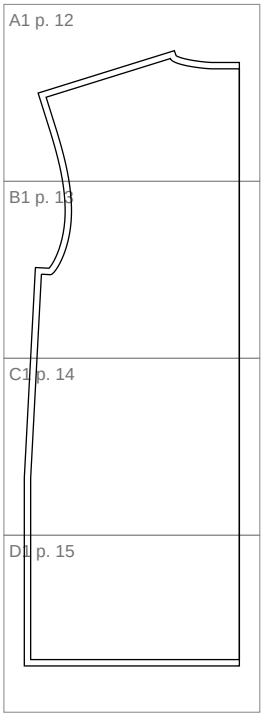
Manche

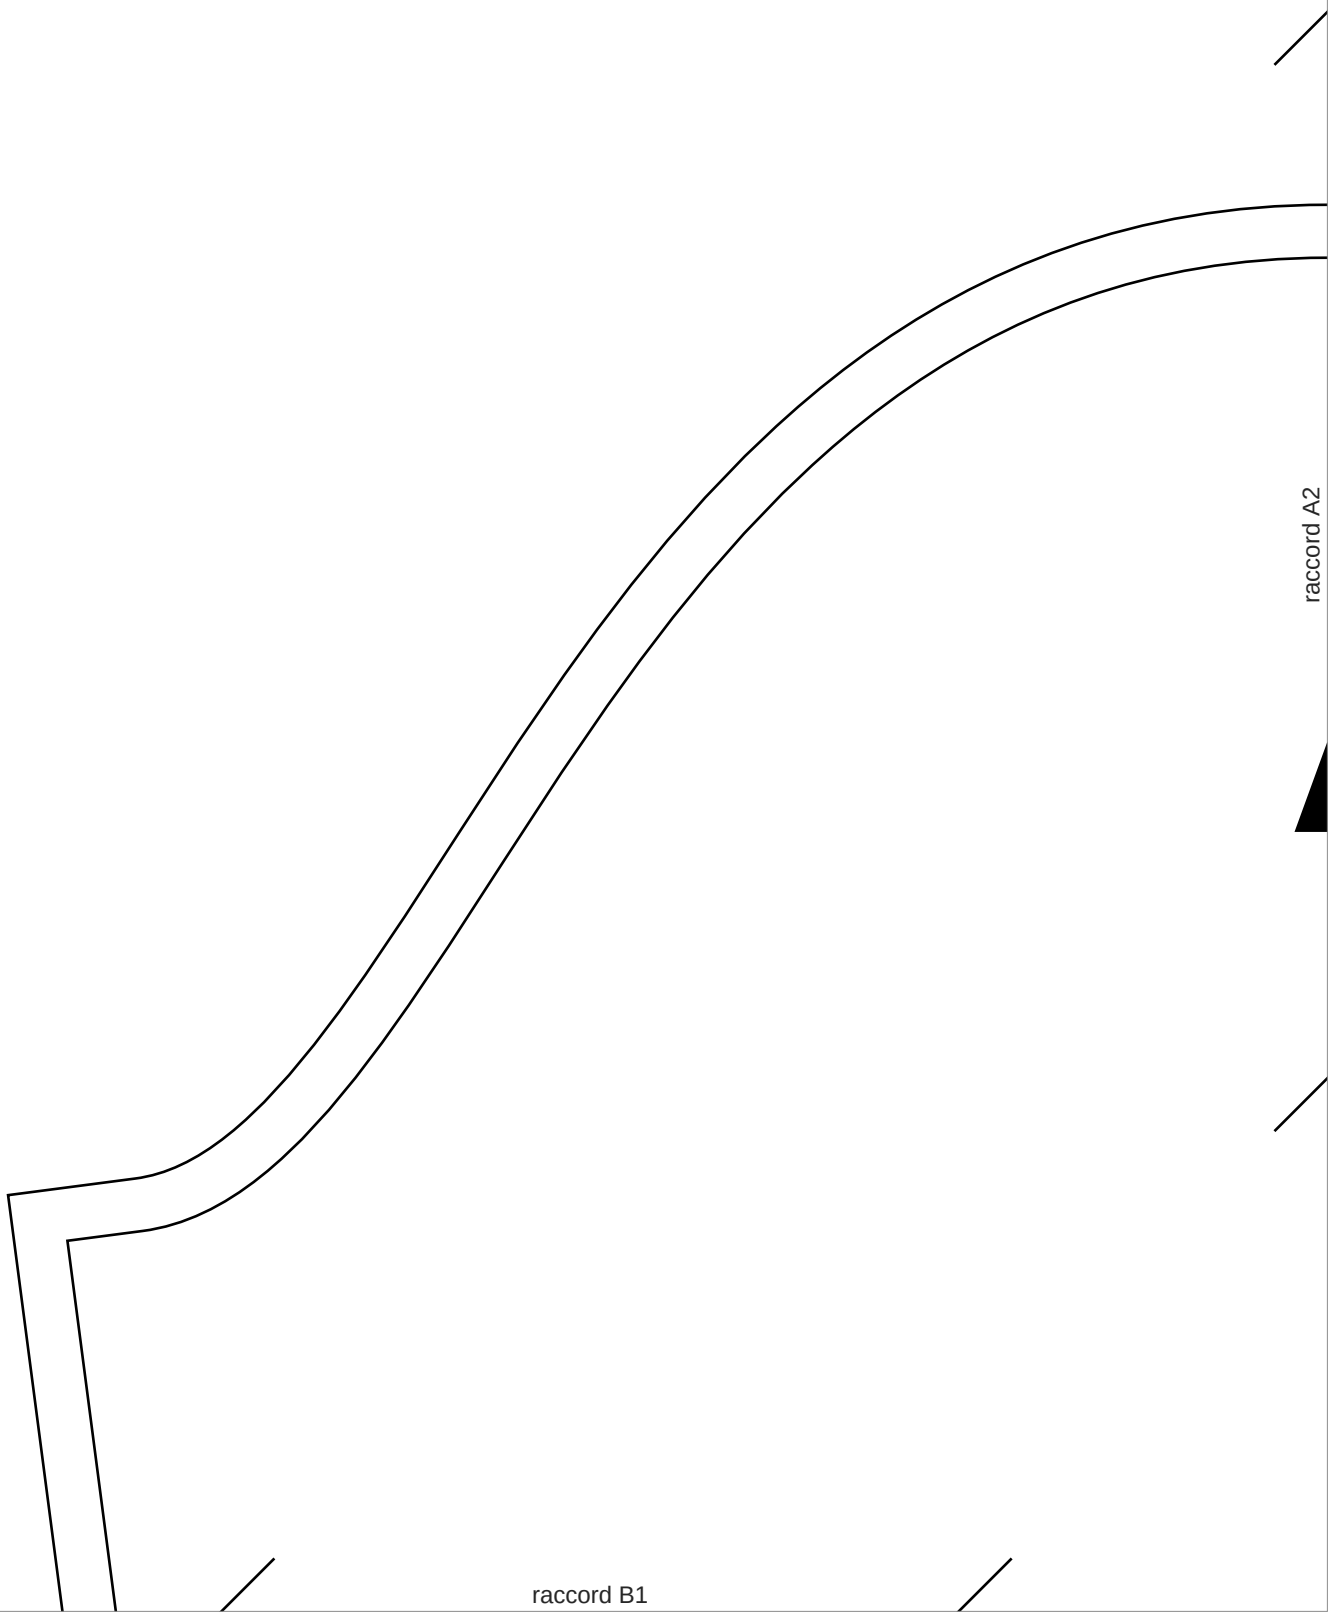


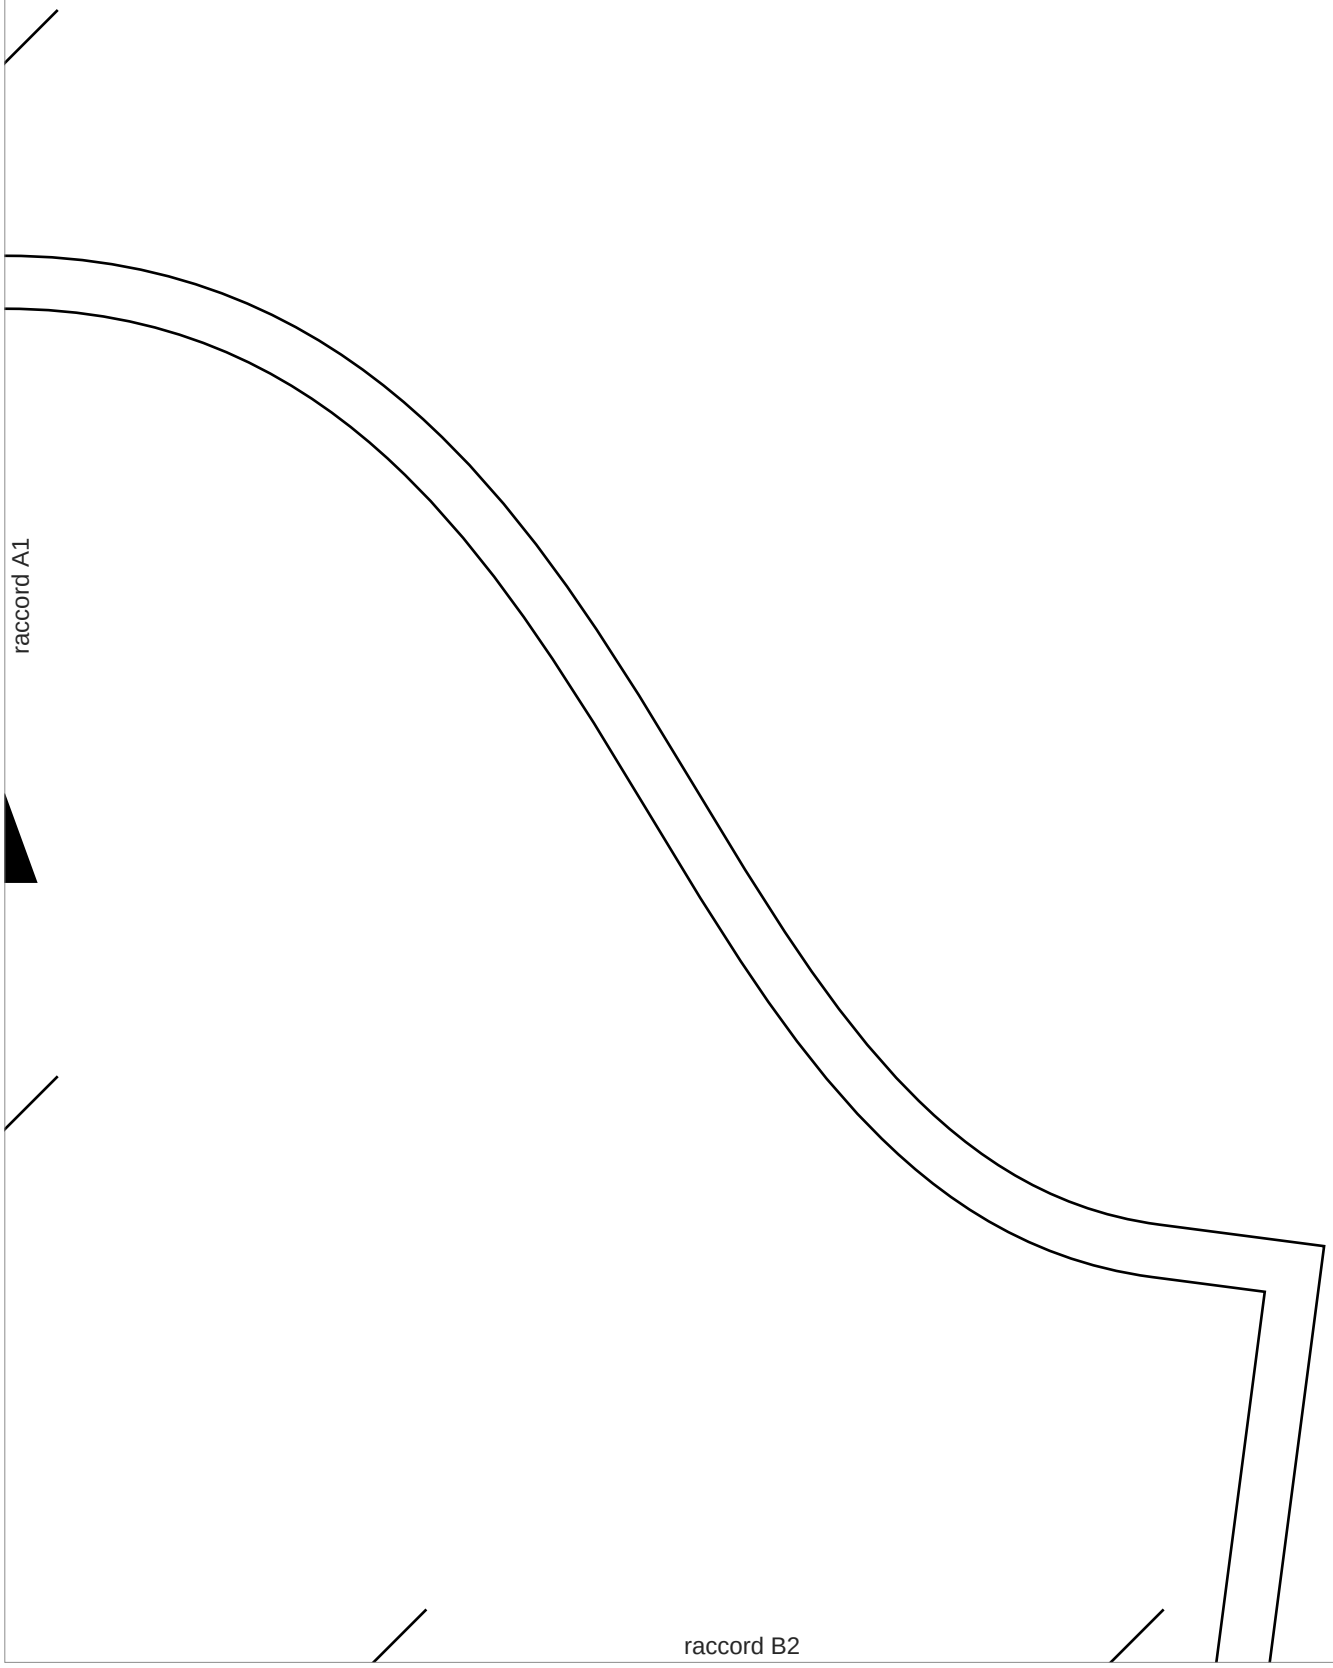
Devant



Dos




raccord A2
raccord B1


raccord A1
raccord B2

raccord A1

FOND DE BASE MAILLE

Base

T44

Droit fil

raccord B2

raccord C1

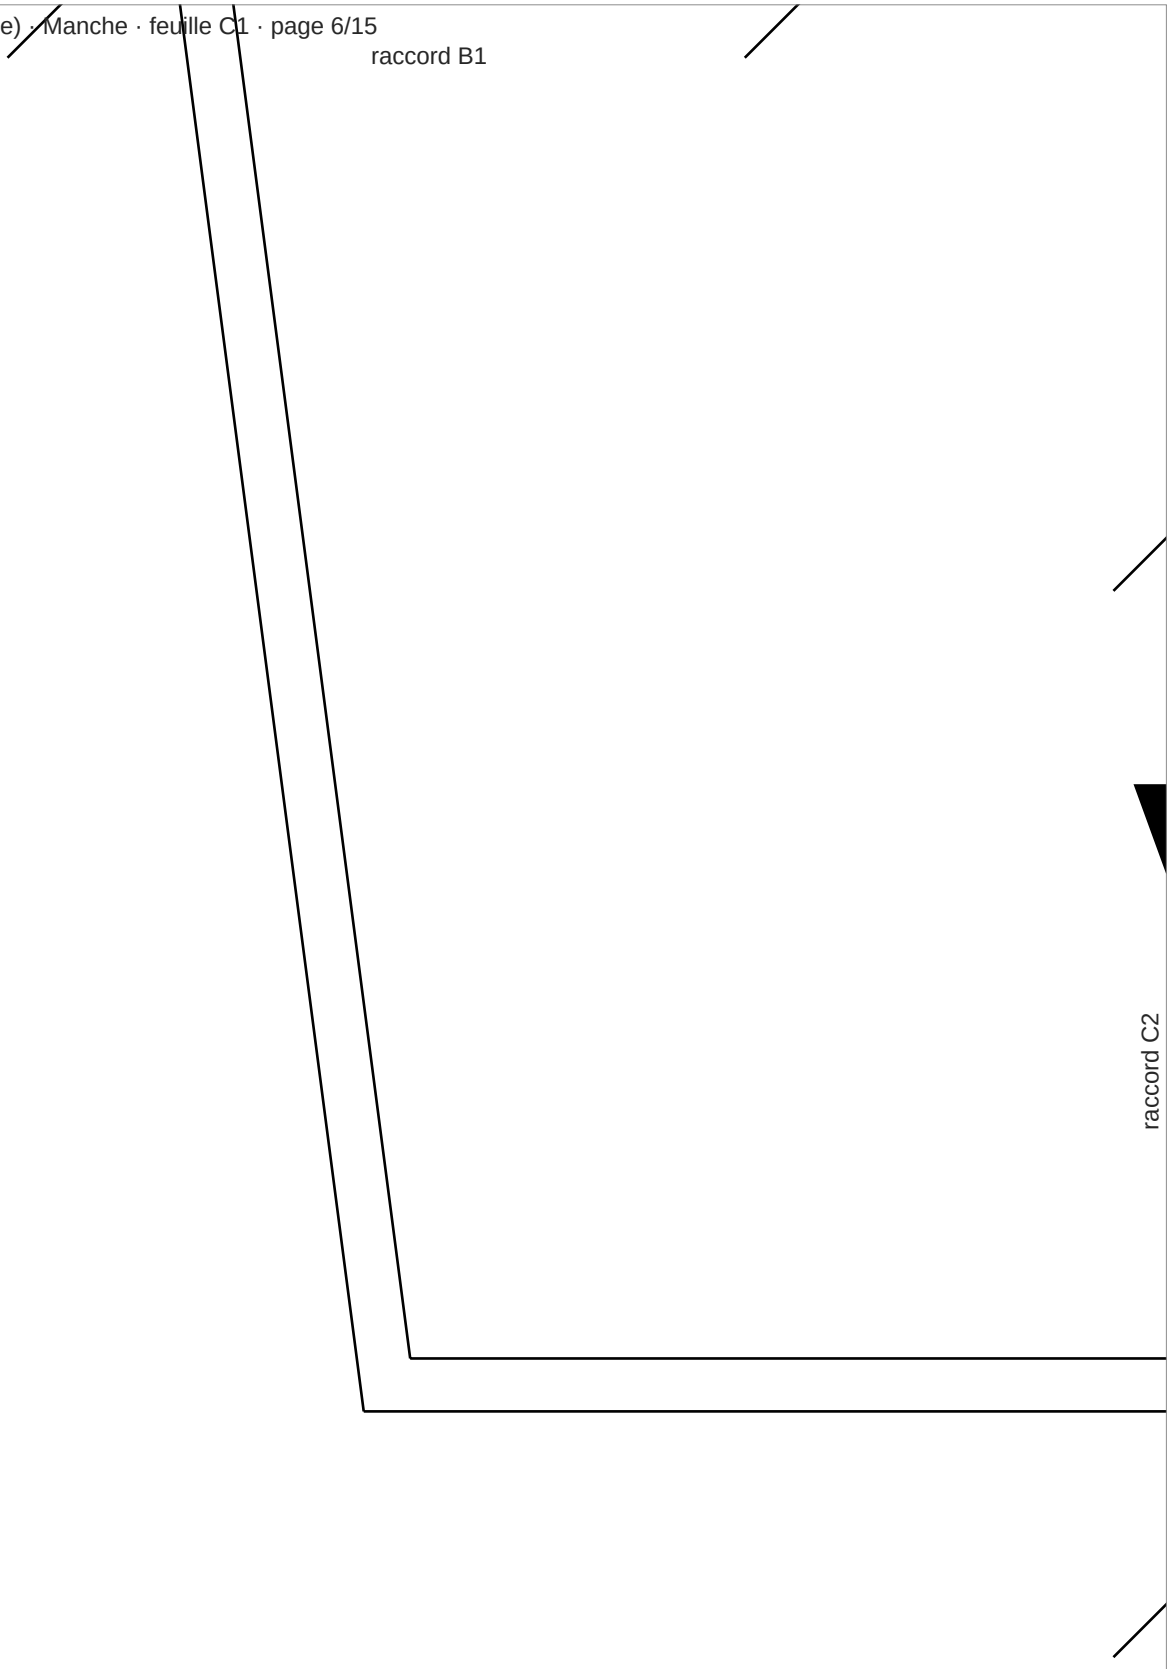
raccord A2

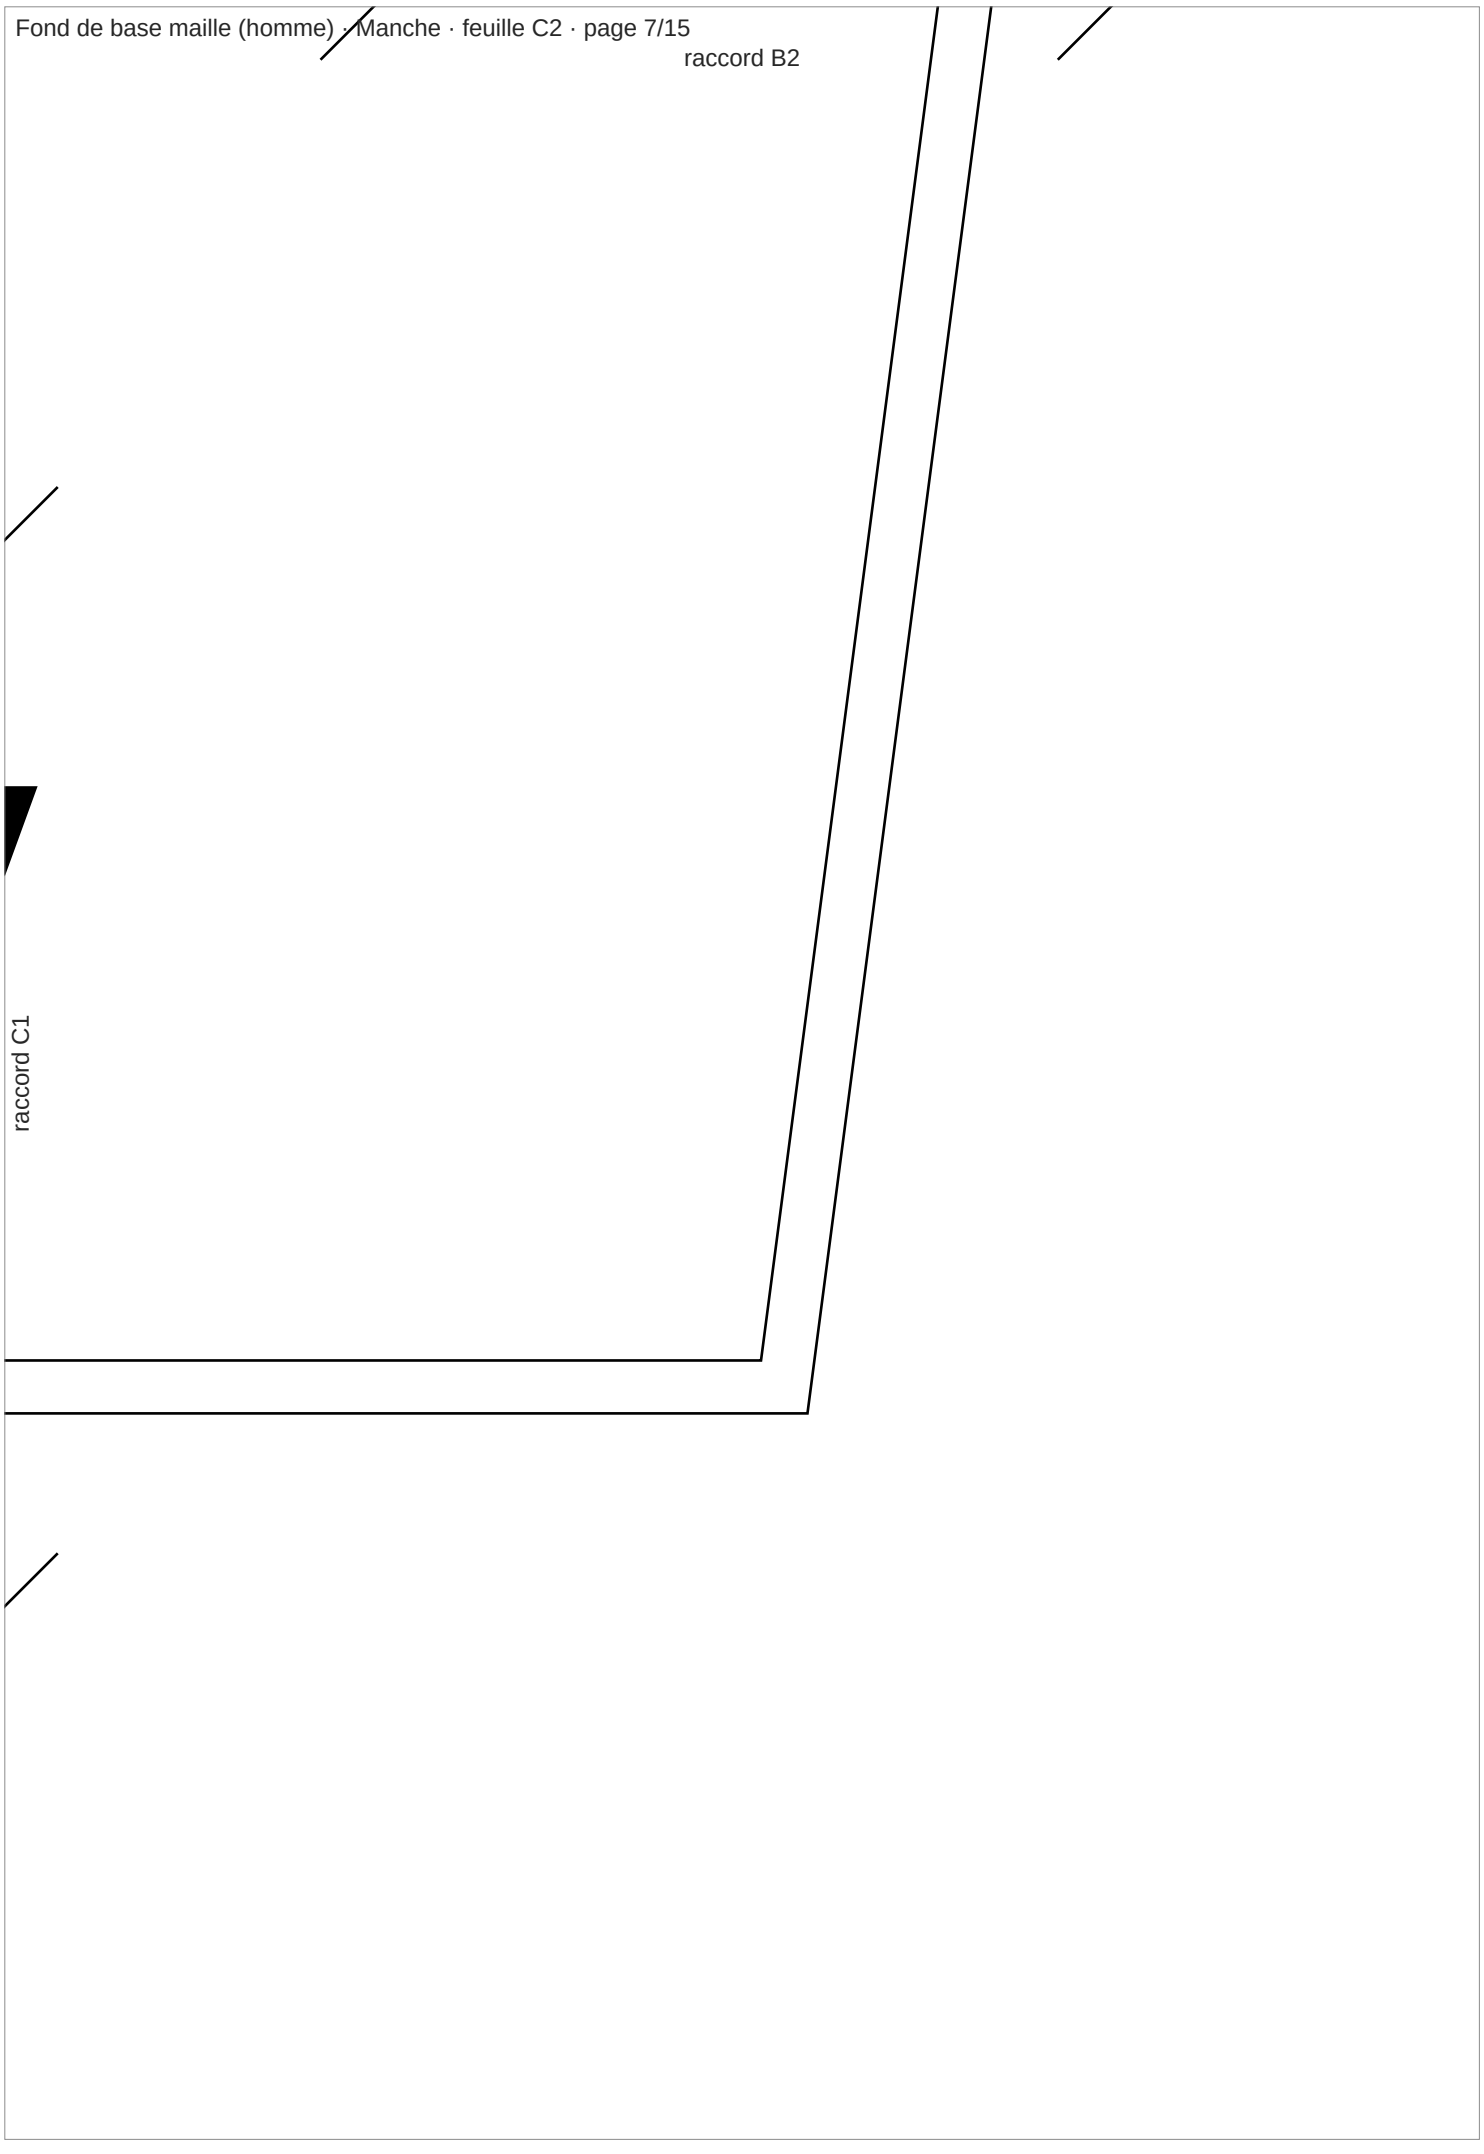
Ma...he

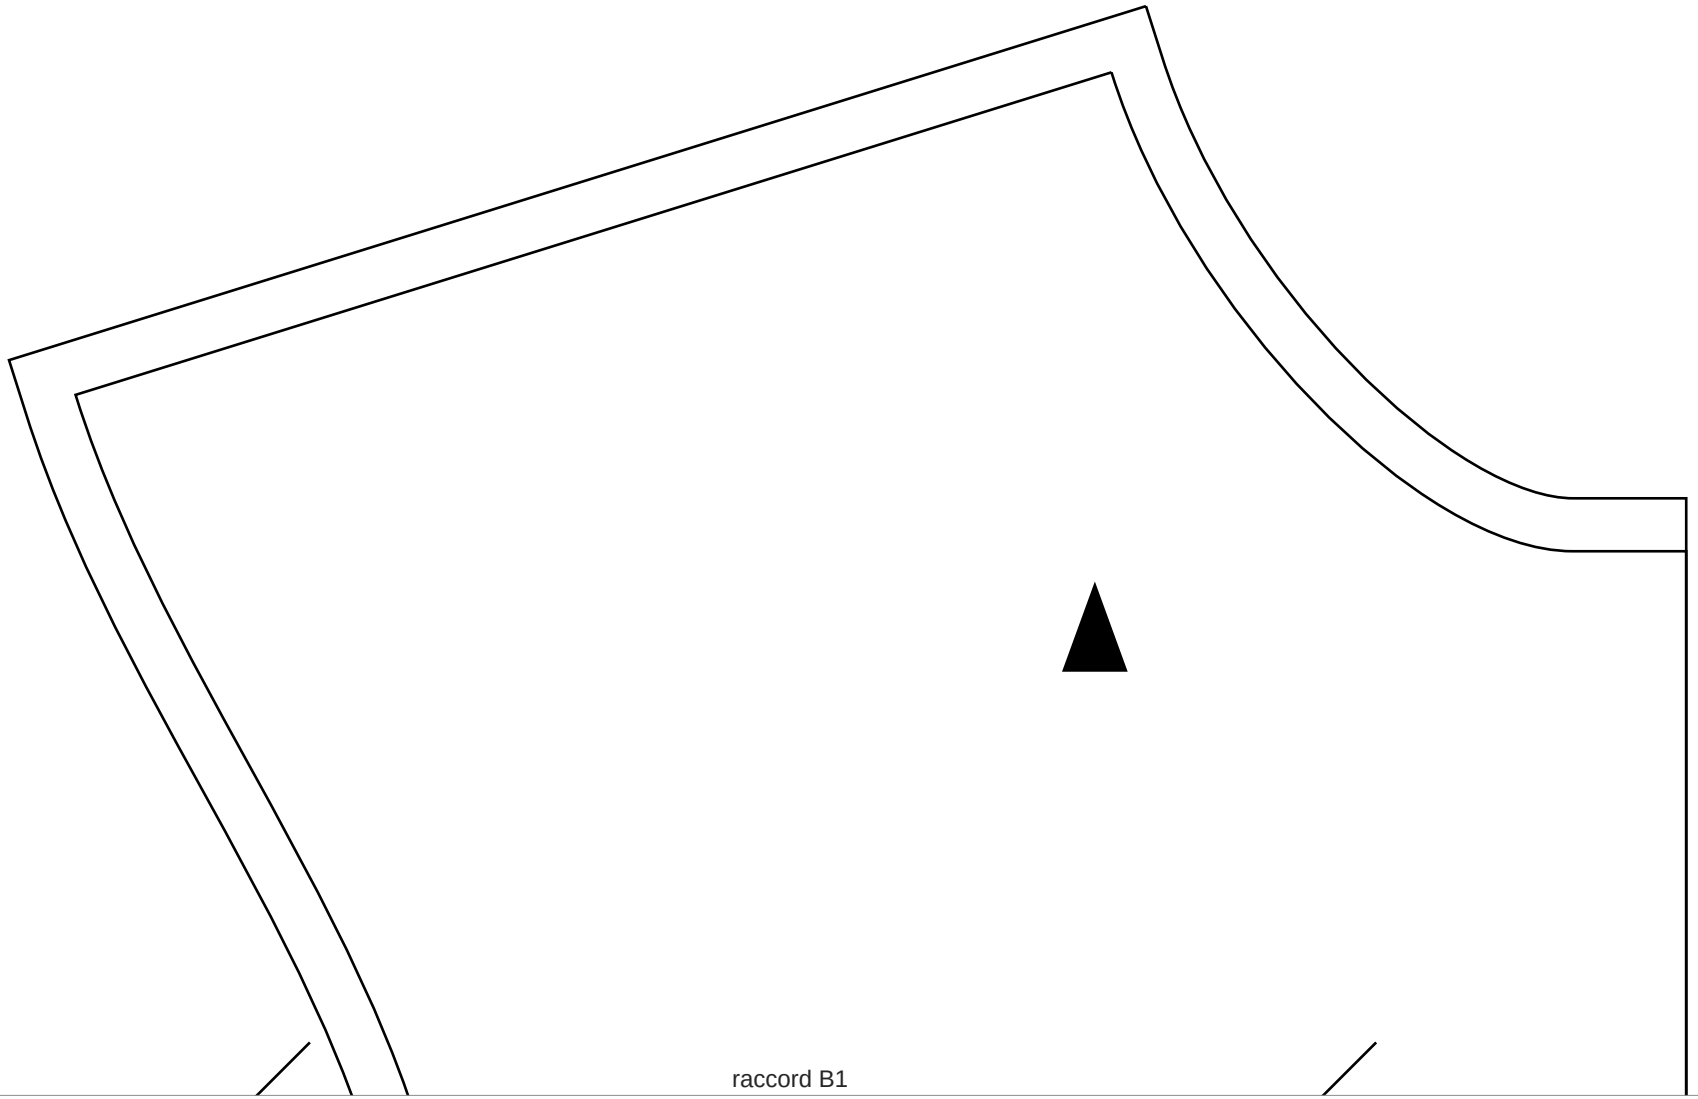
Tissu X2

raccord B1

raccord C2


raccord B1
raccord C2


raccord B2
raccord C1


raccord B1

raccord A1

FOND DE BASE MAILLE

Base

T44

raccord C1

t fil

Devant

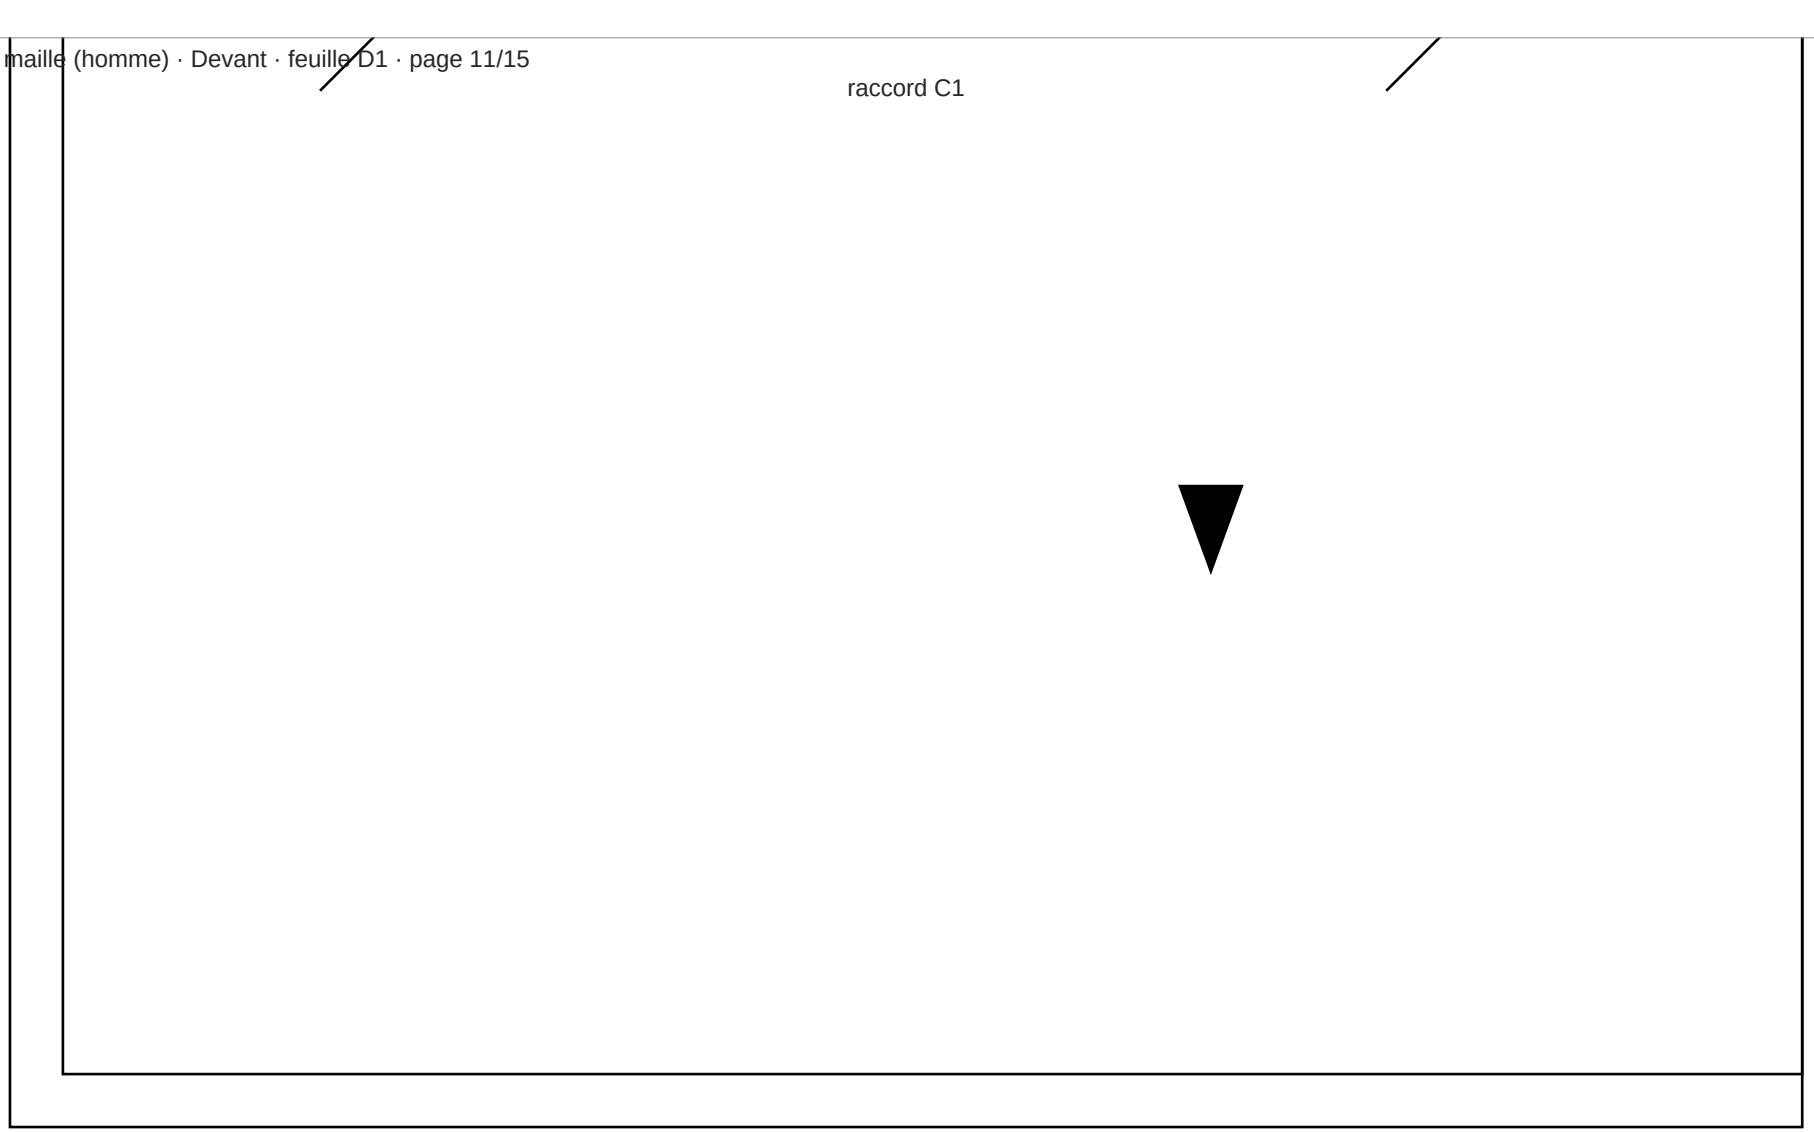
Tissu X1

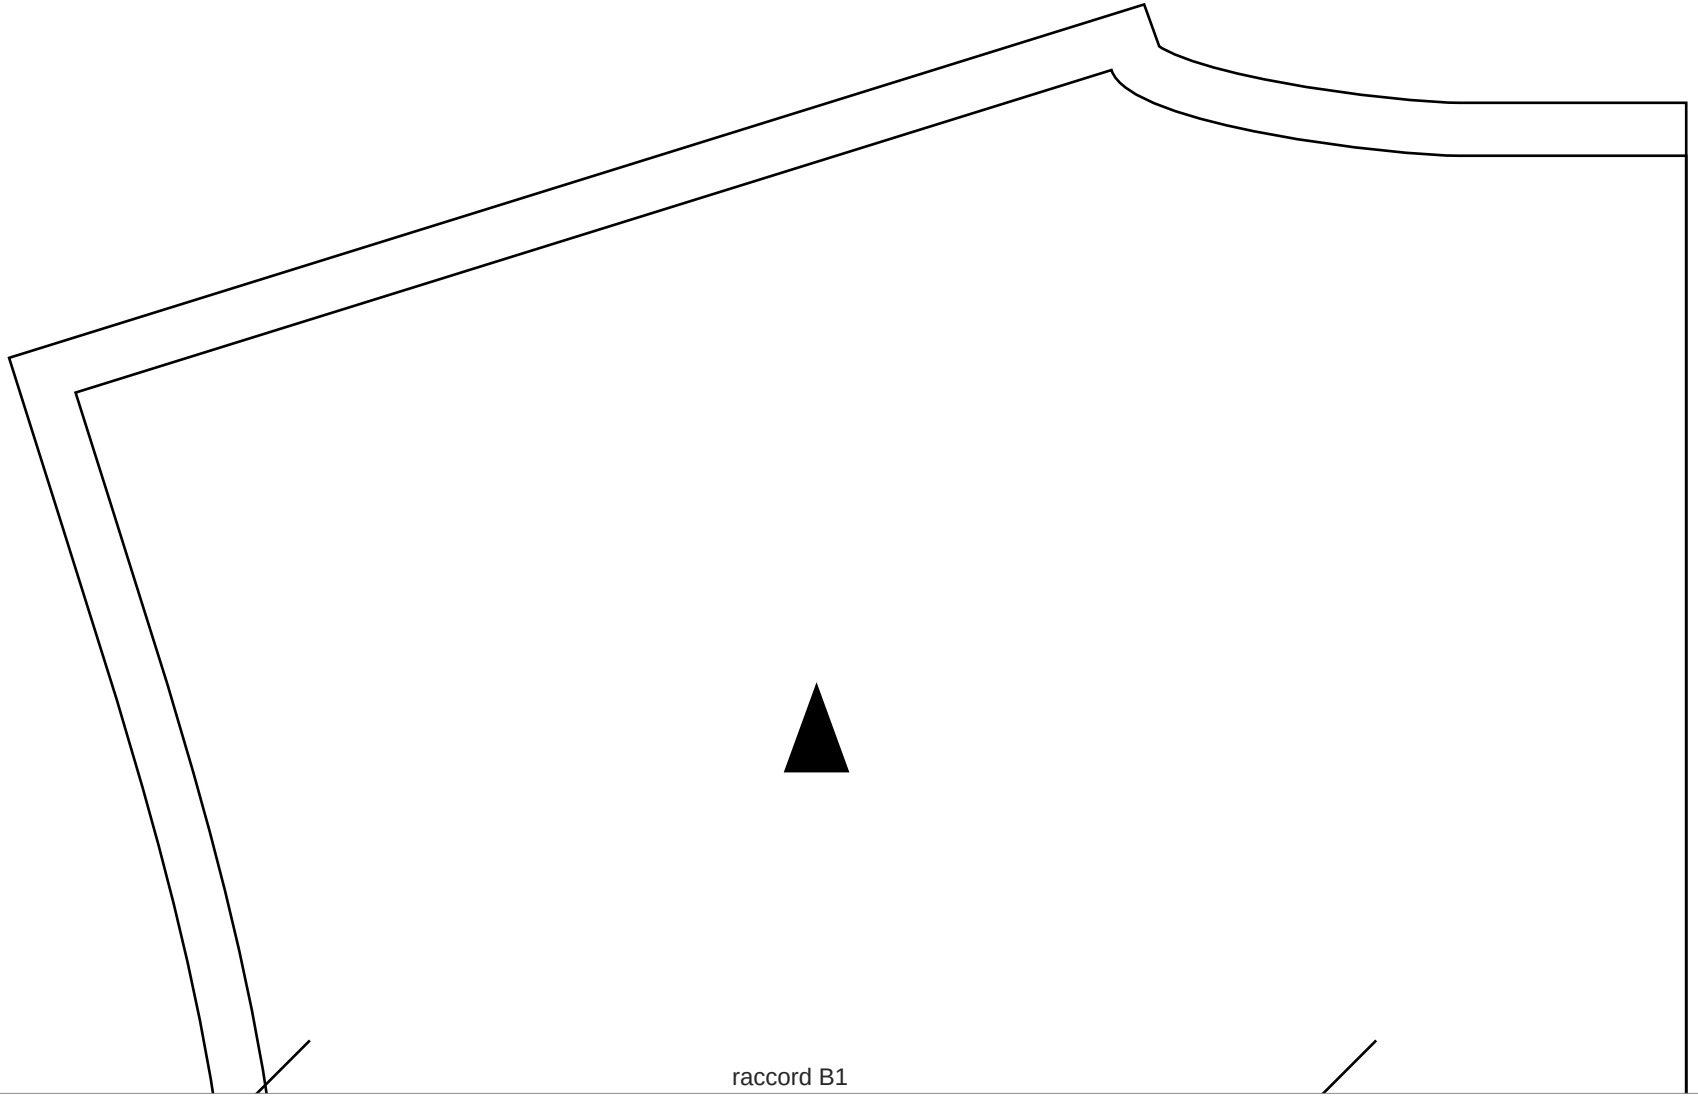
raccord B1

Droi

raccord D1

raccord C1




raccord B1

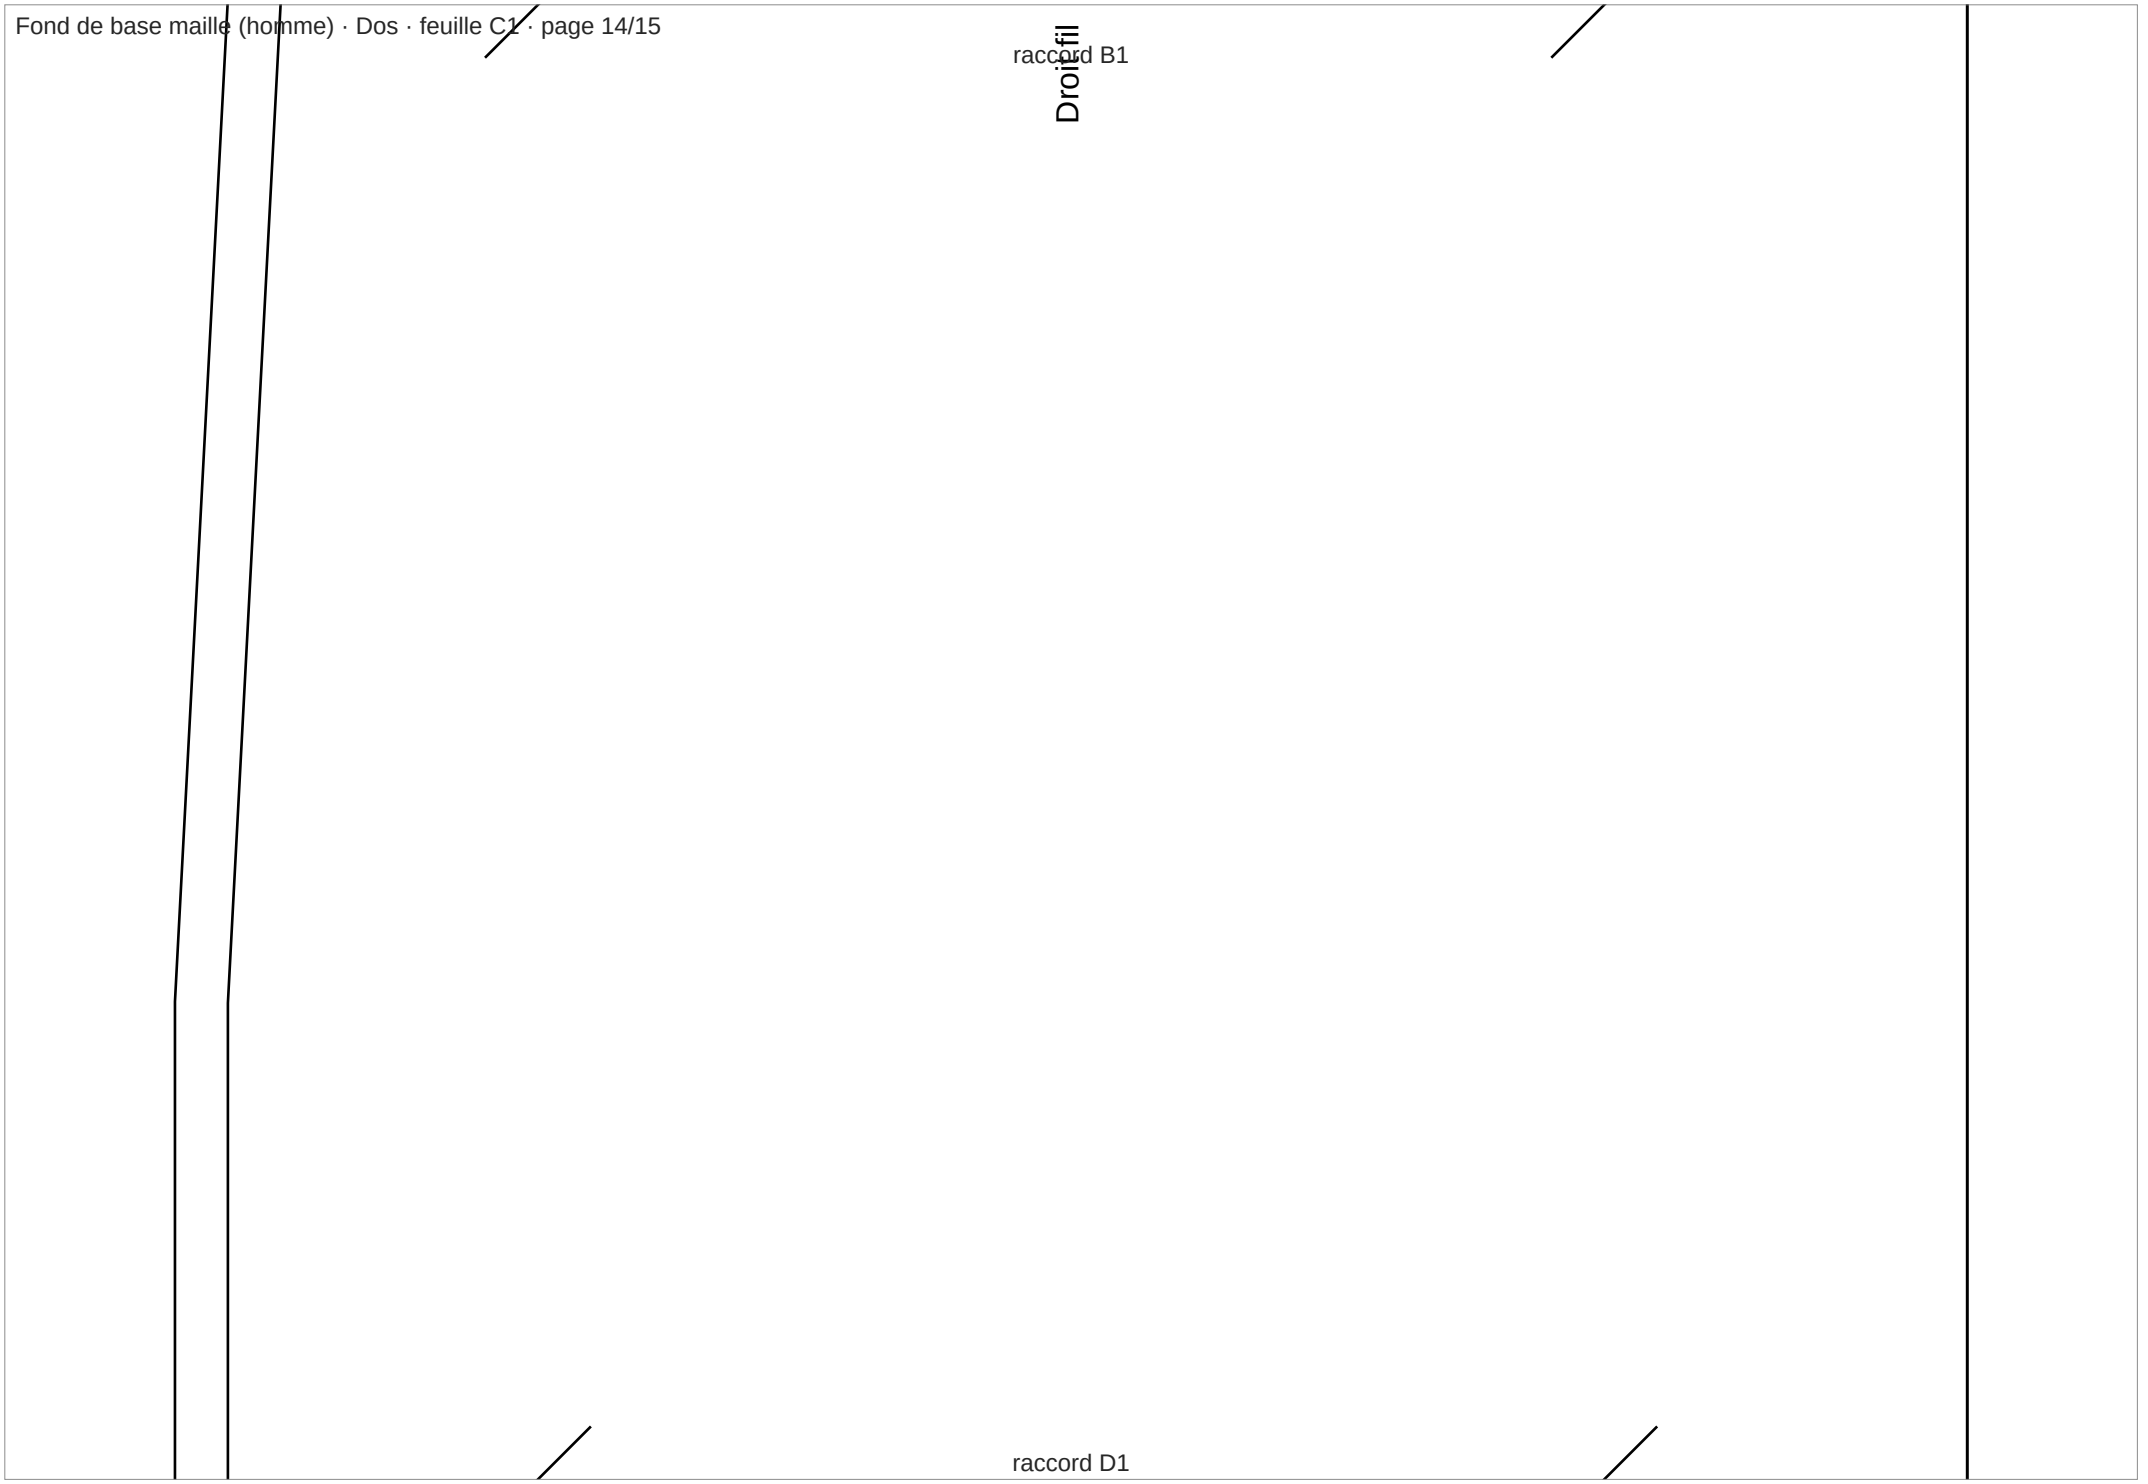
raccord A1

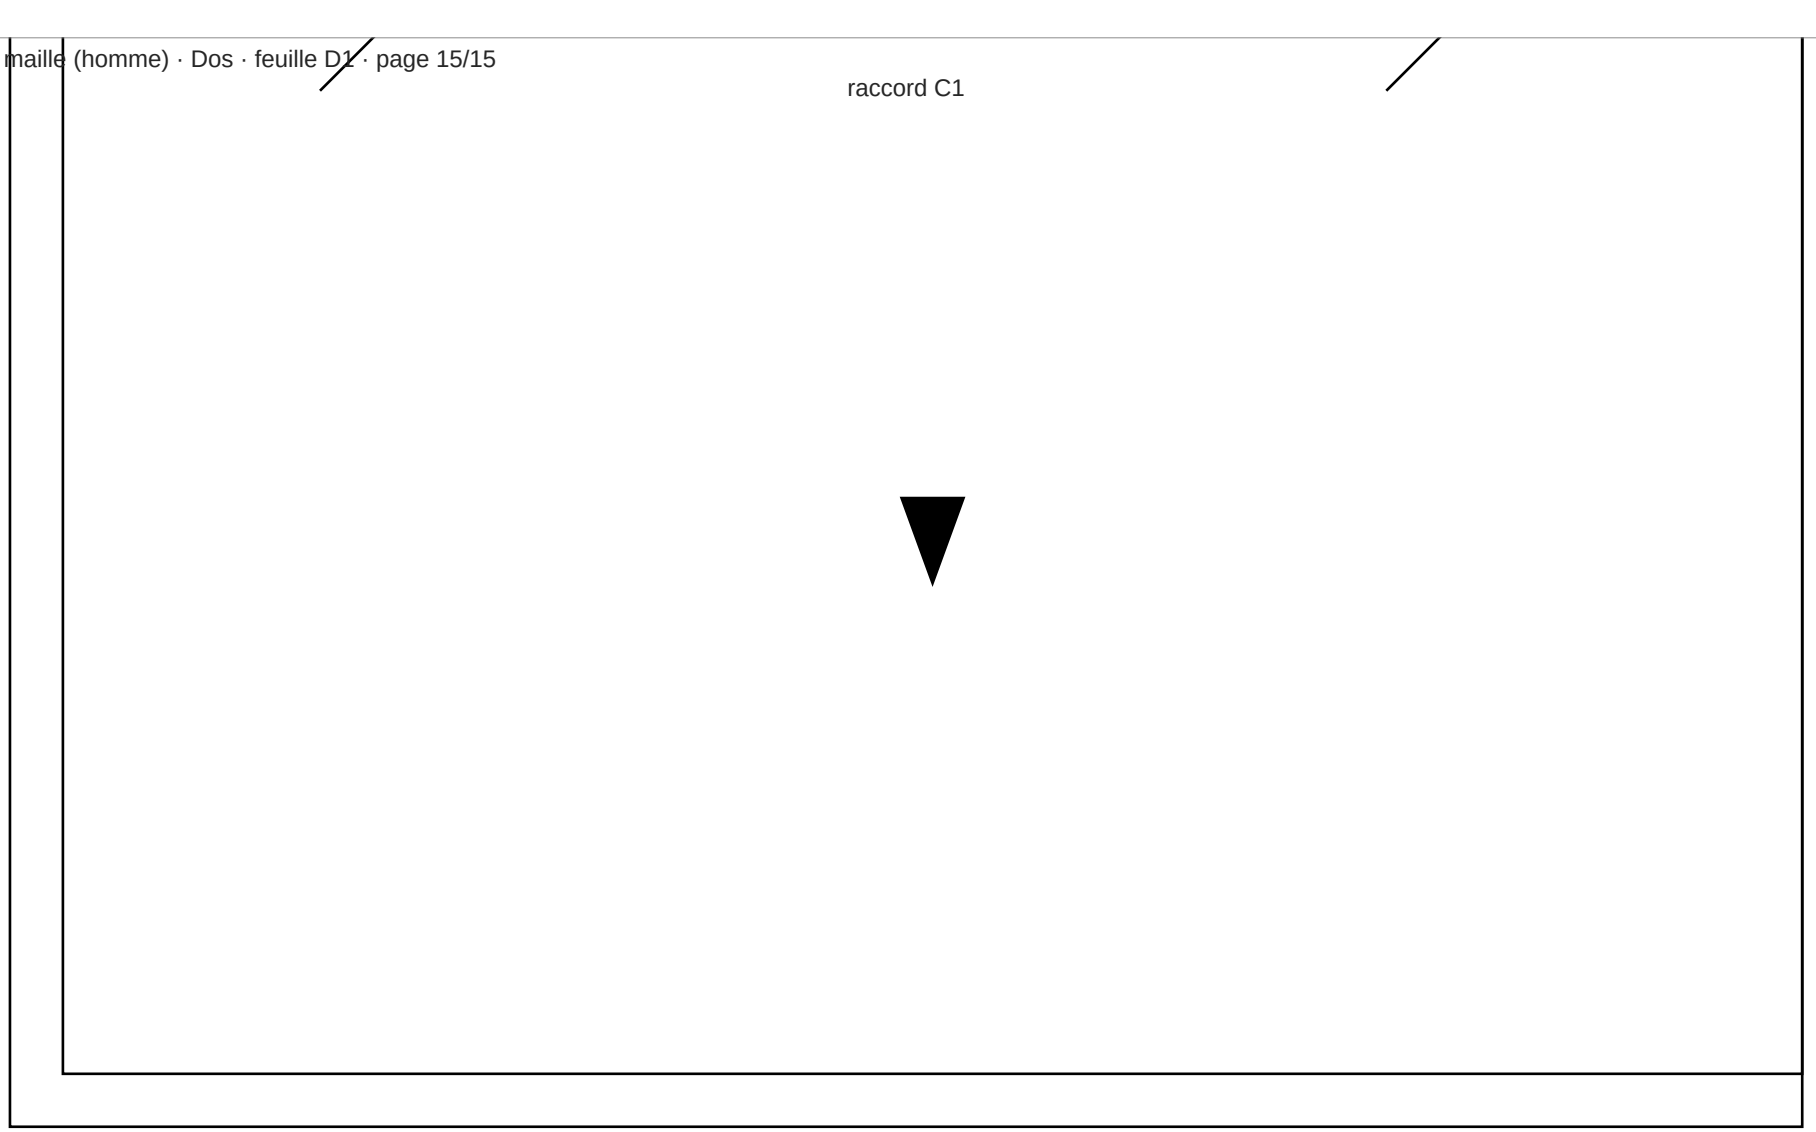
FOND DE BASE MAILLE

Base
T44

Dos
Tissu X1

raccord C1


raccord B1
Droit fil
raccord D1


raccord C1