Fond de base maille (homme)

Taille 54 · tracé et export Seamly2D

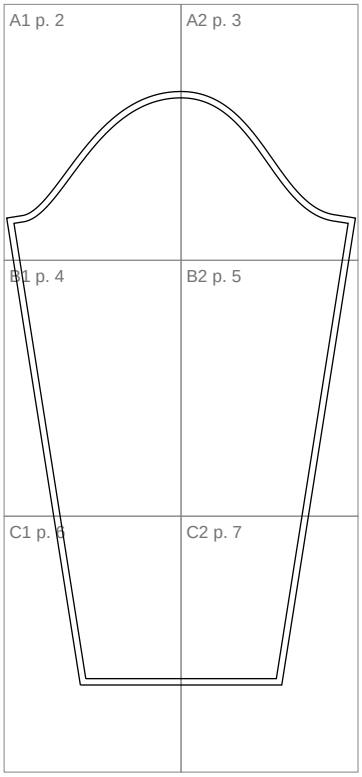
Carré 5×5

Imprimer à 100 % (« taille réelle », sans ajustement à la page). Vérifier le carré de contrôle ci-contre : 5 cm de côté. Chaque pièce a ses propres feuilles : couper chaque feuille sur le cadre gris là où elle touche une voisine, puis scotcher bord à bord selon le plan (lettre = rangée, chiffre = colonne), en prolongeant les repères en biais d'une feuille à l'autre. Tracé extérieur : ligne de coupe, coutures de 0,7 cm comprises ; tracé intérieur : ligne de couture.

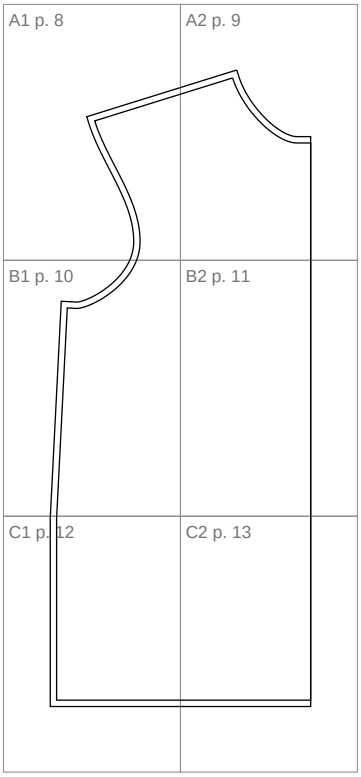
Pièces et assemblages (18 feuilles A4)

Manche (couper 2 fois (en symétrie)) : 6 feuilles portrait, 7 raccords, pages 2 à 7
Devant (couper 1 fois au pli) : 6 feuilles portrait, 7 raccords, pages 8 à 13
Dos (couper 1 fois au pli) : 6 feuilles portrait, 7 raccords, pages 14 à 19

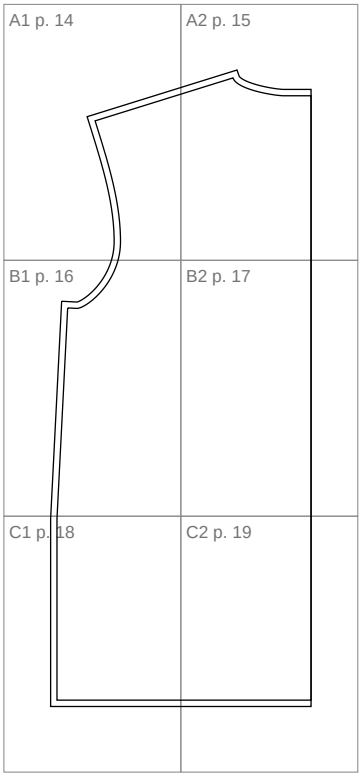
Manche

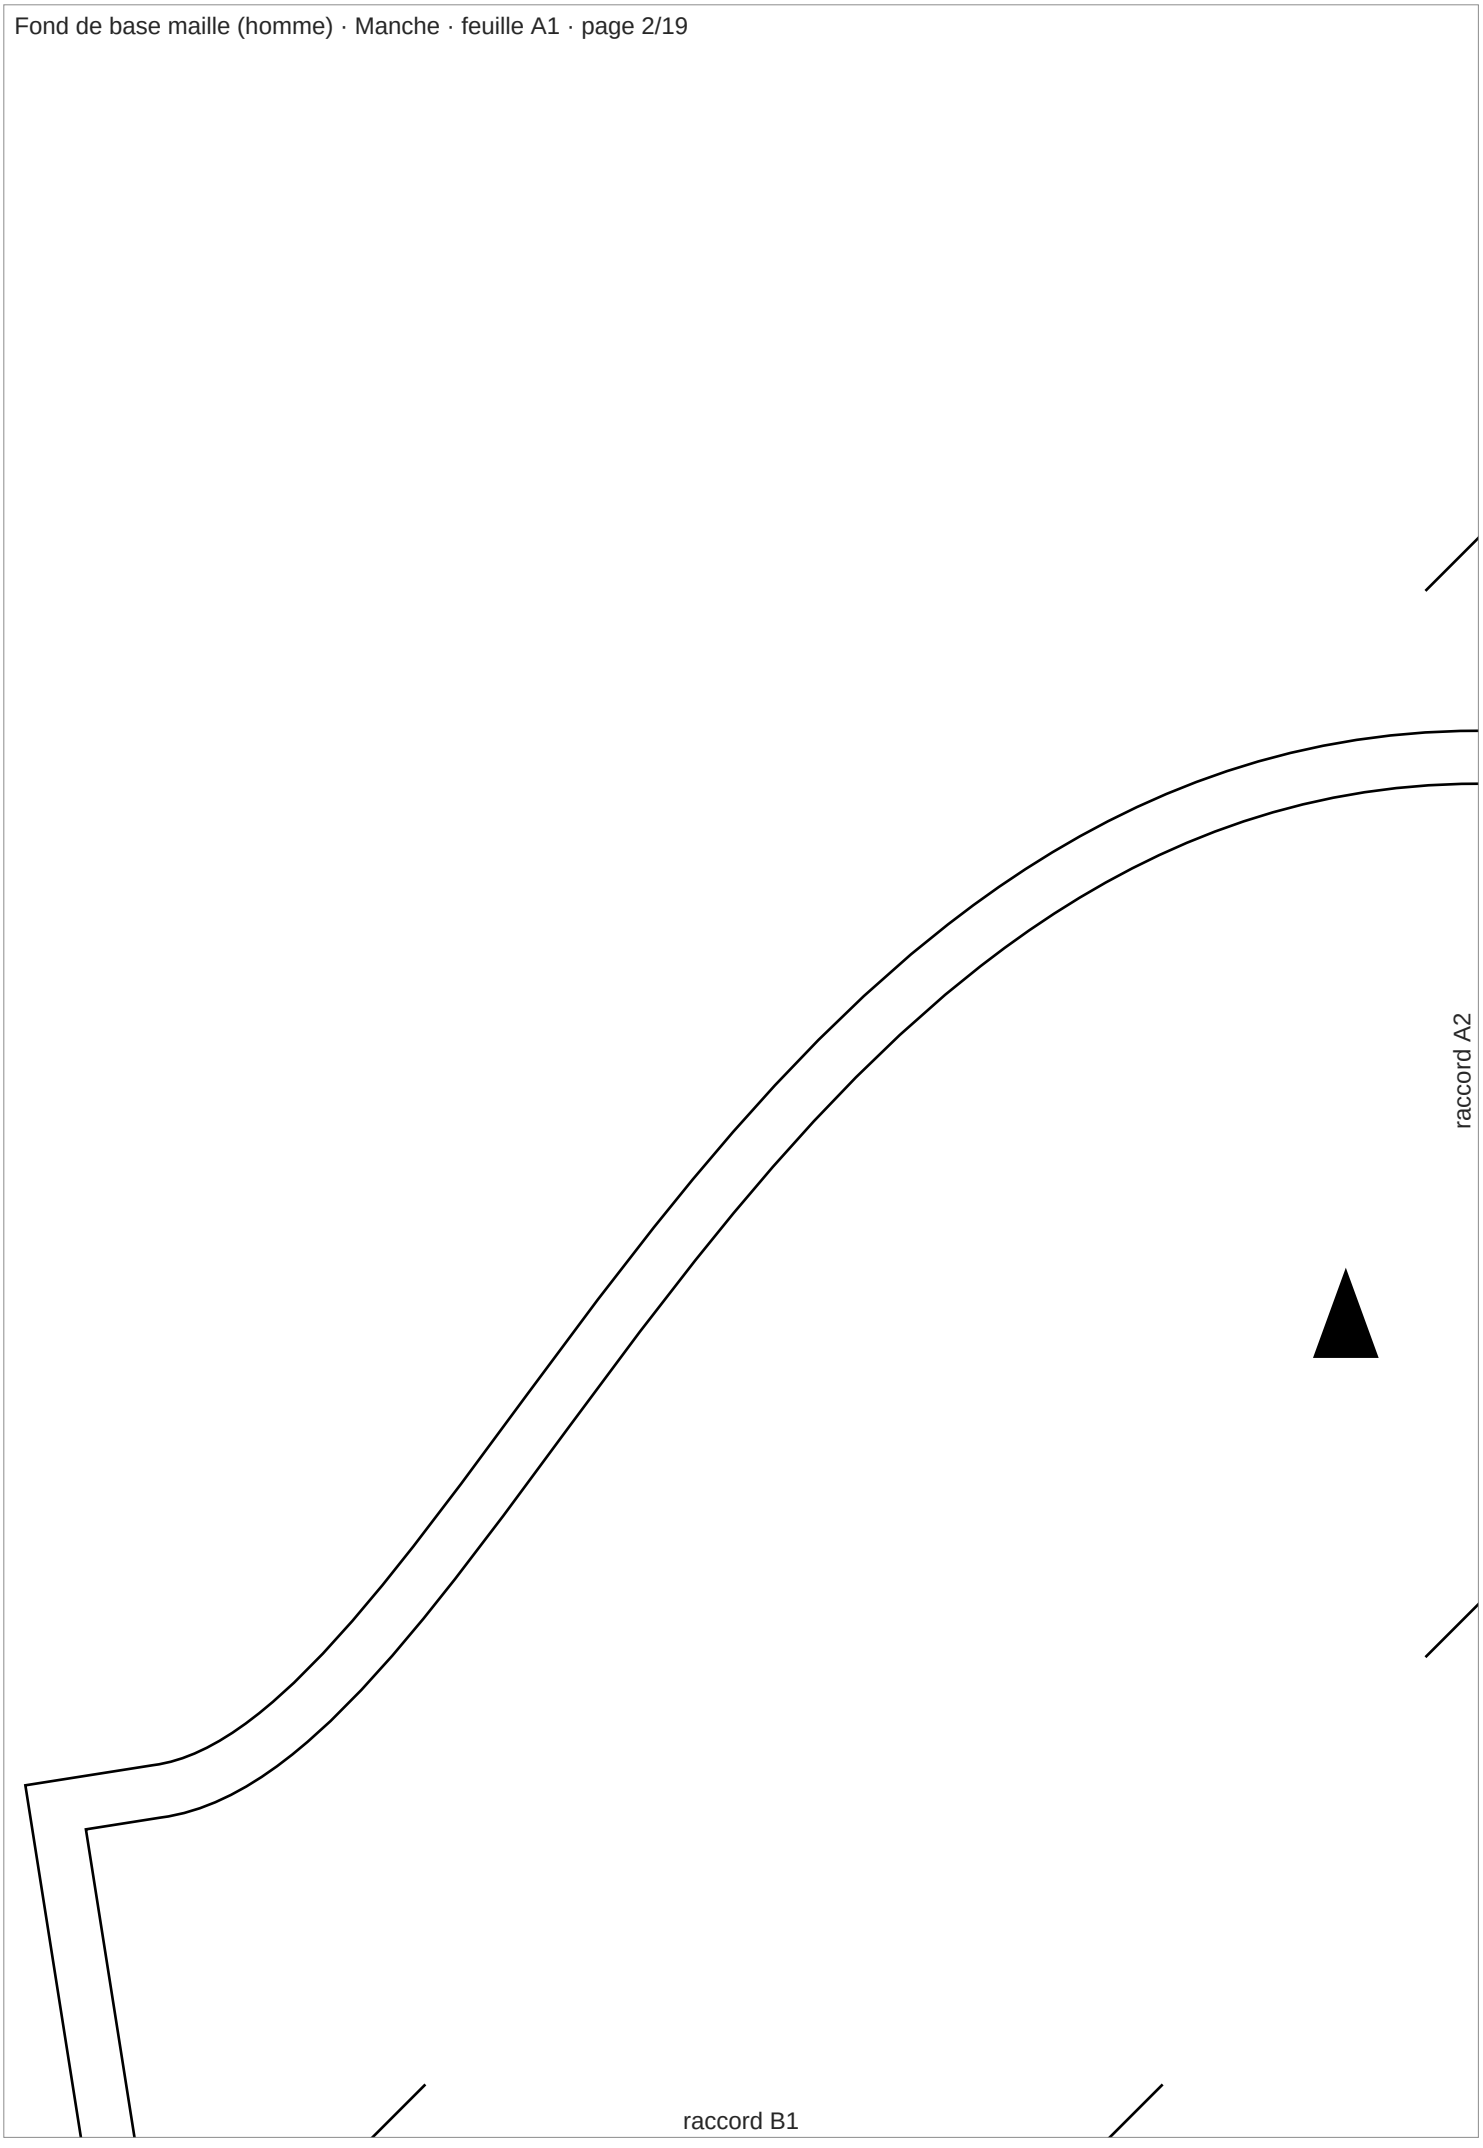


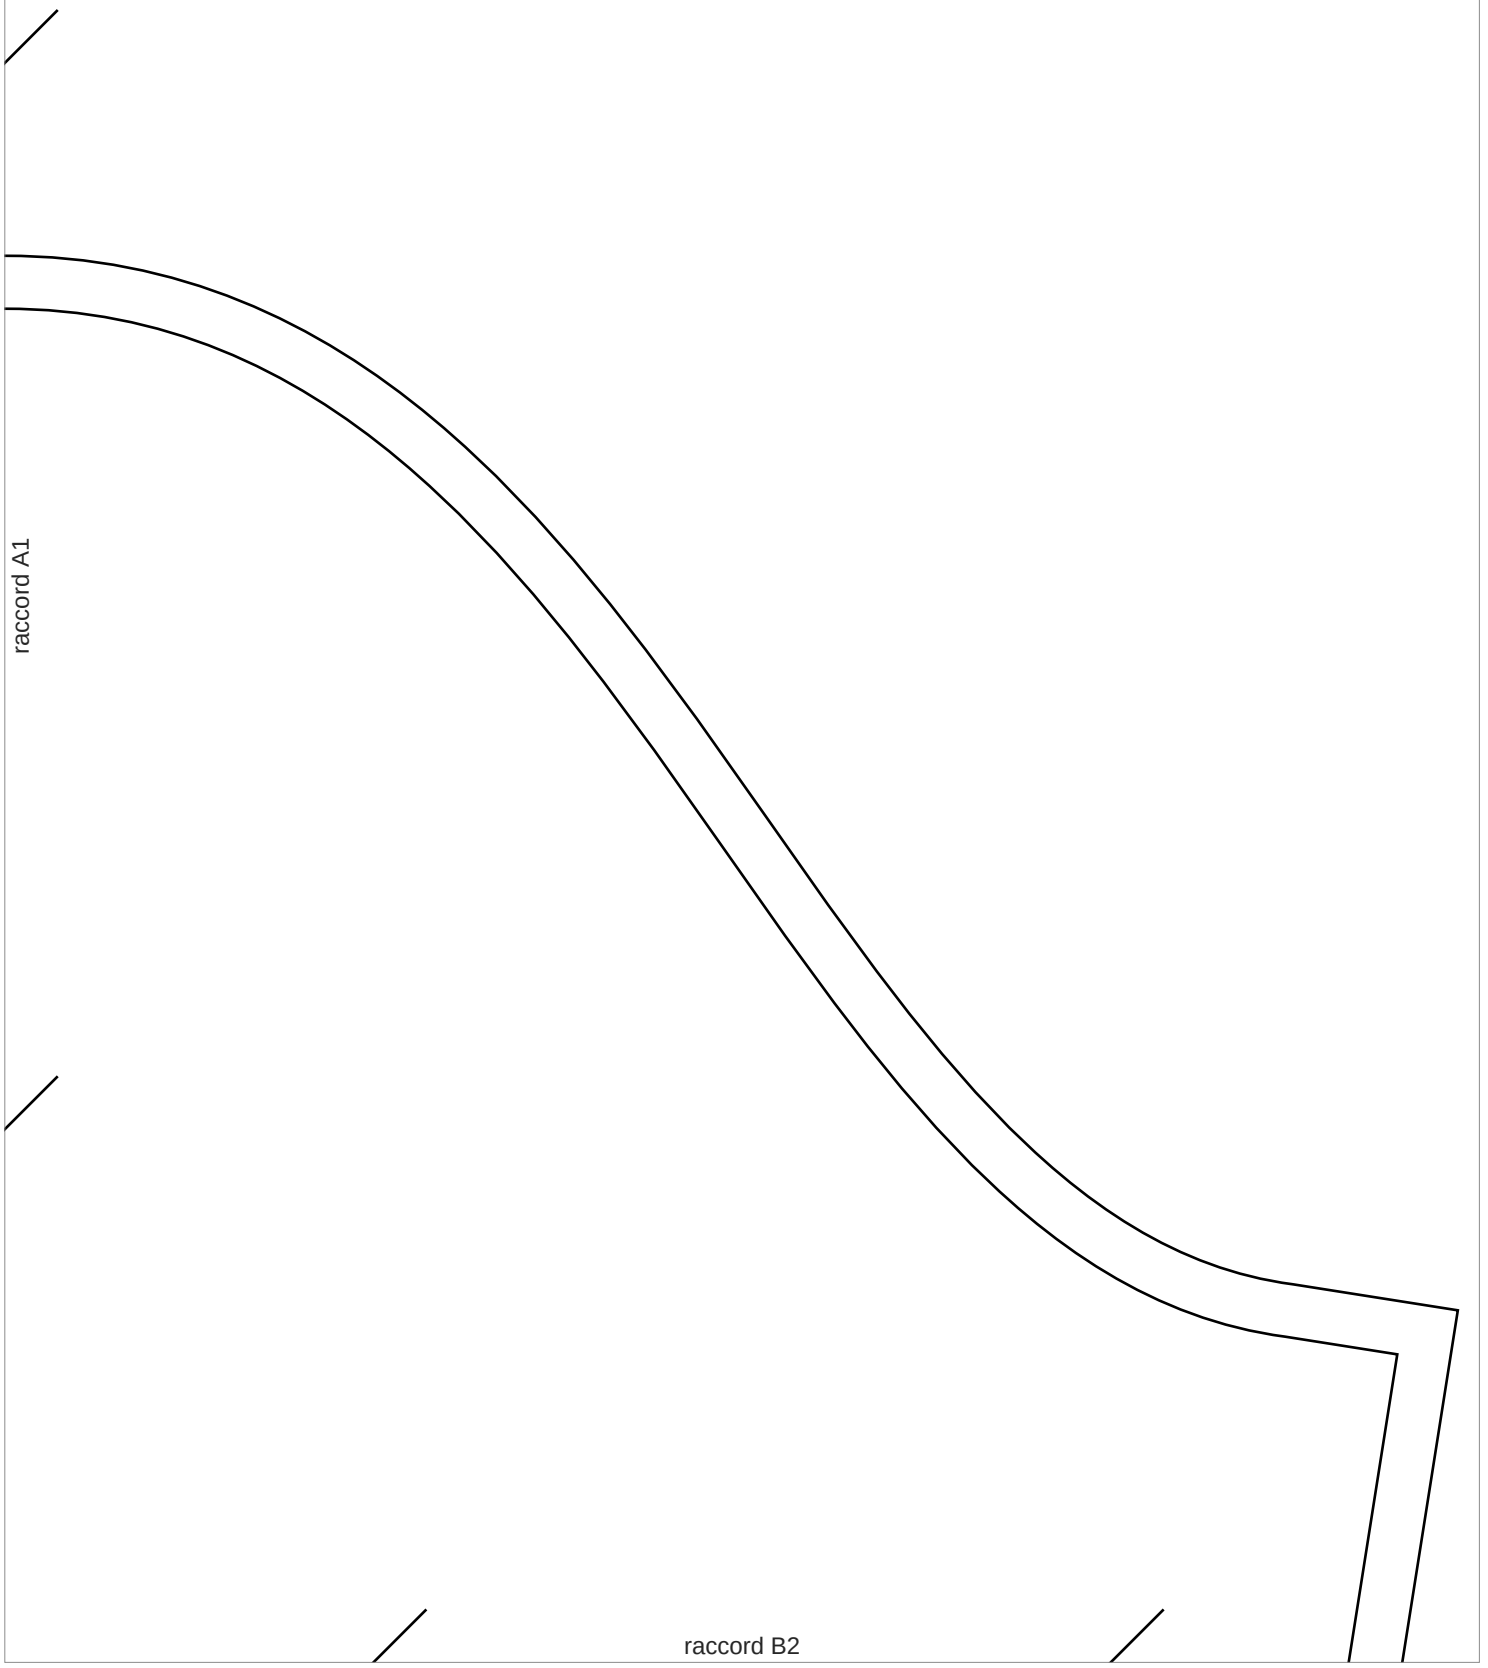
Devant



Dos




raccord A2
raccord B1


raccord A1
raccord B2

raccord A1

FOND DE BASE MAILLE

Base

T54

Droit fil

raccord B2

raccord C1

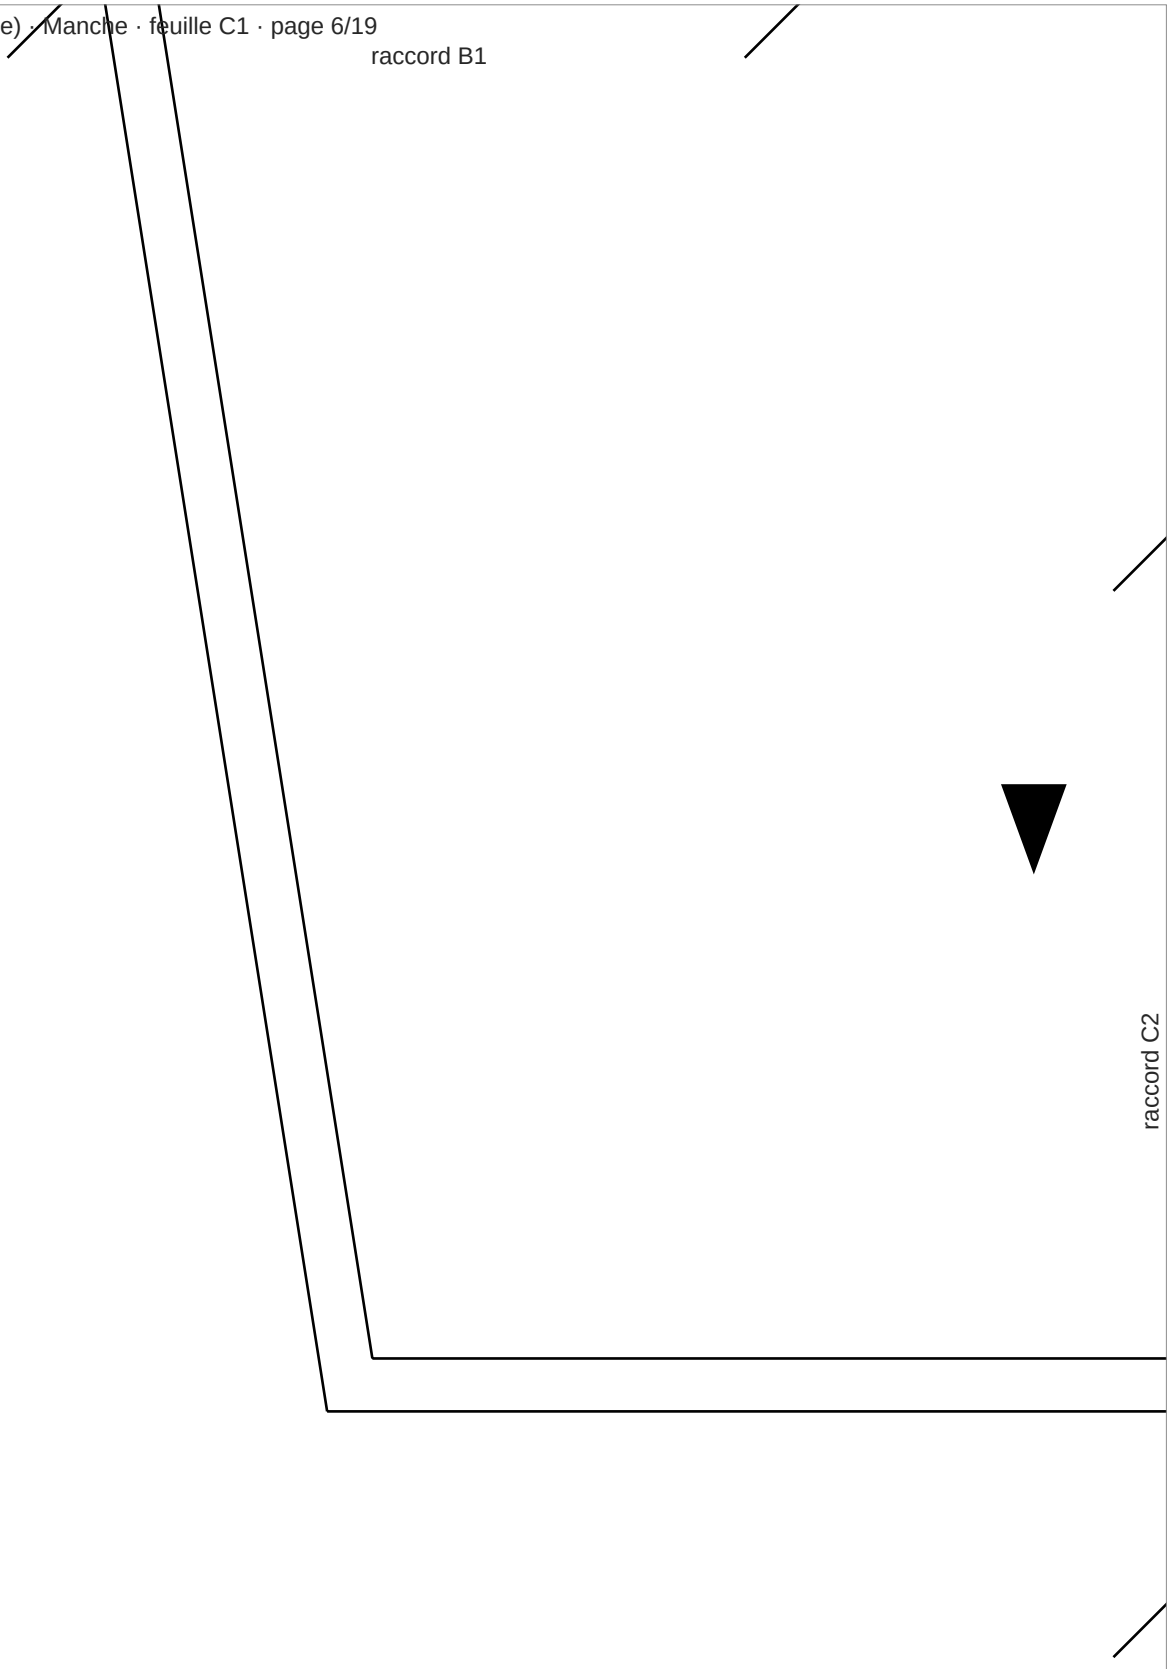
raccord A2

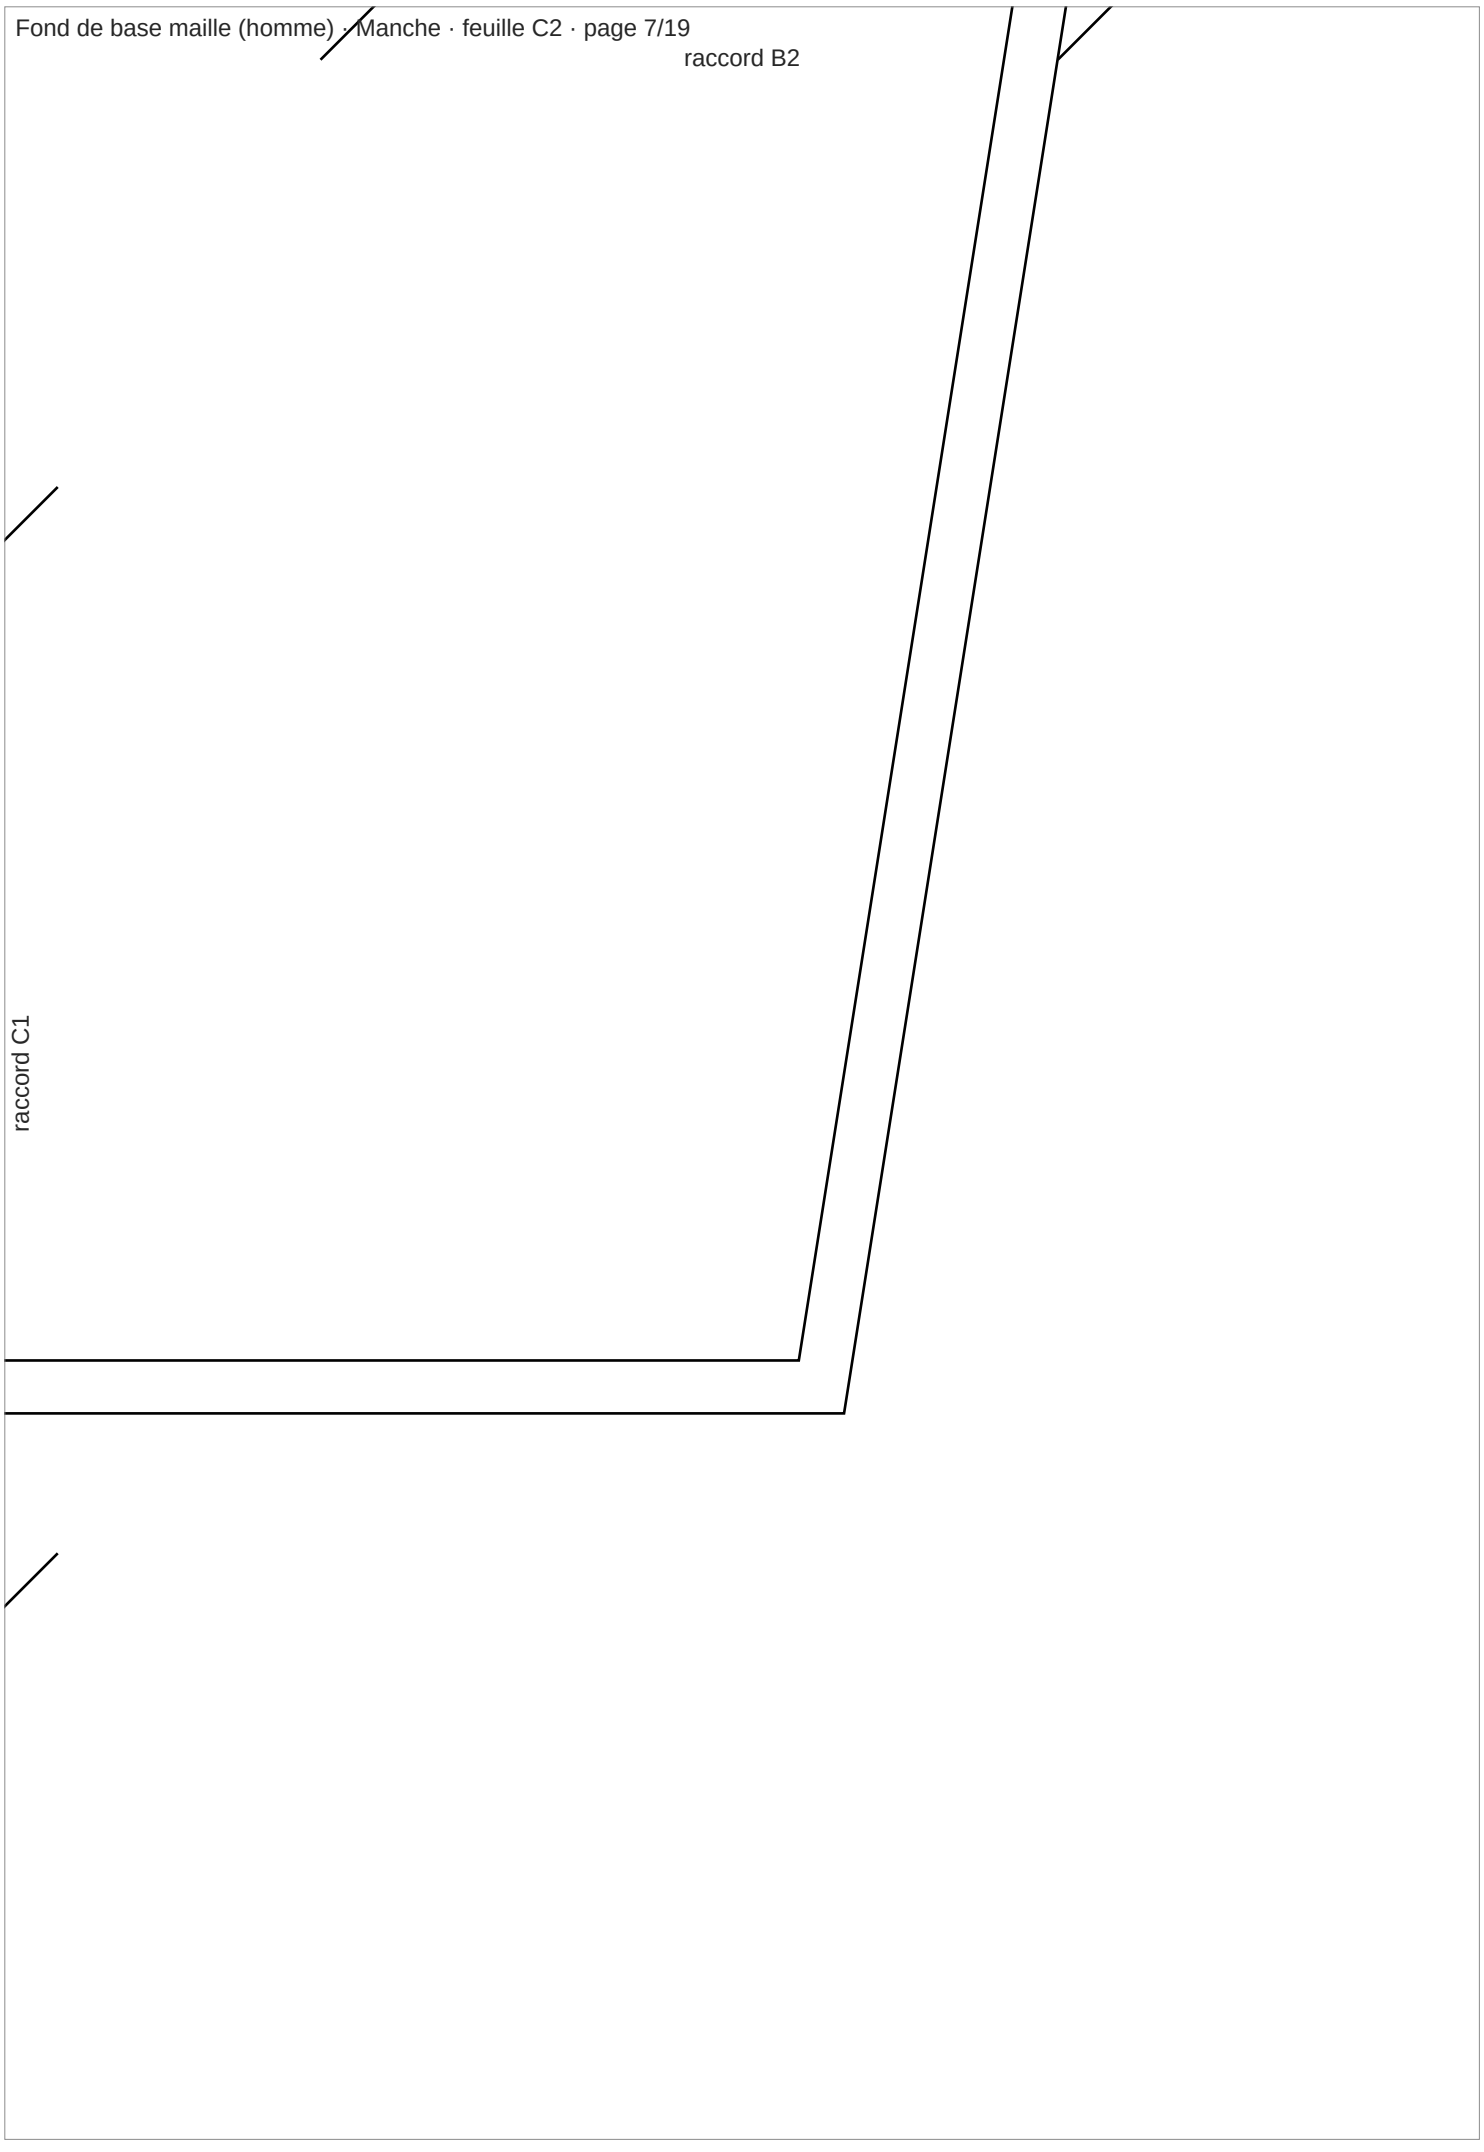
Ma...he

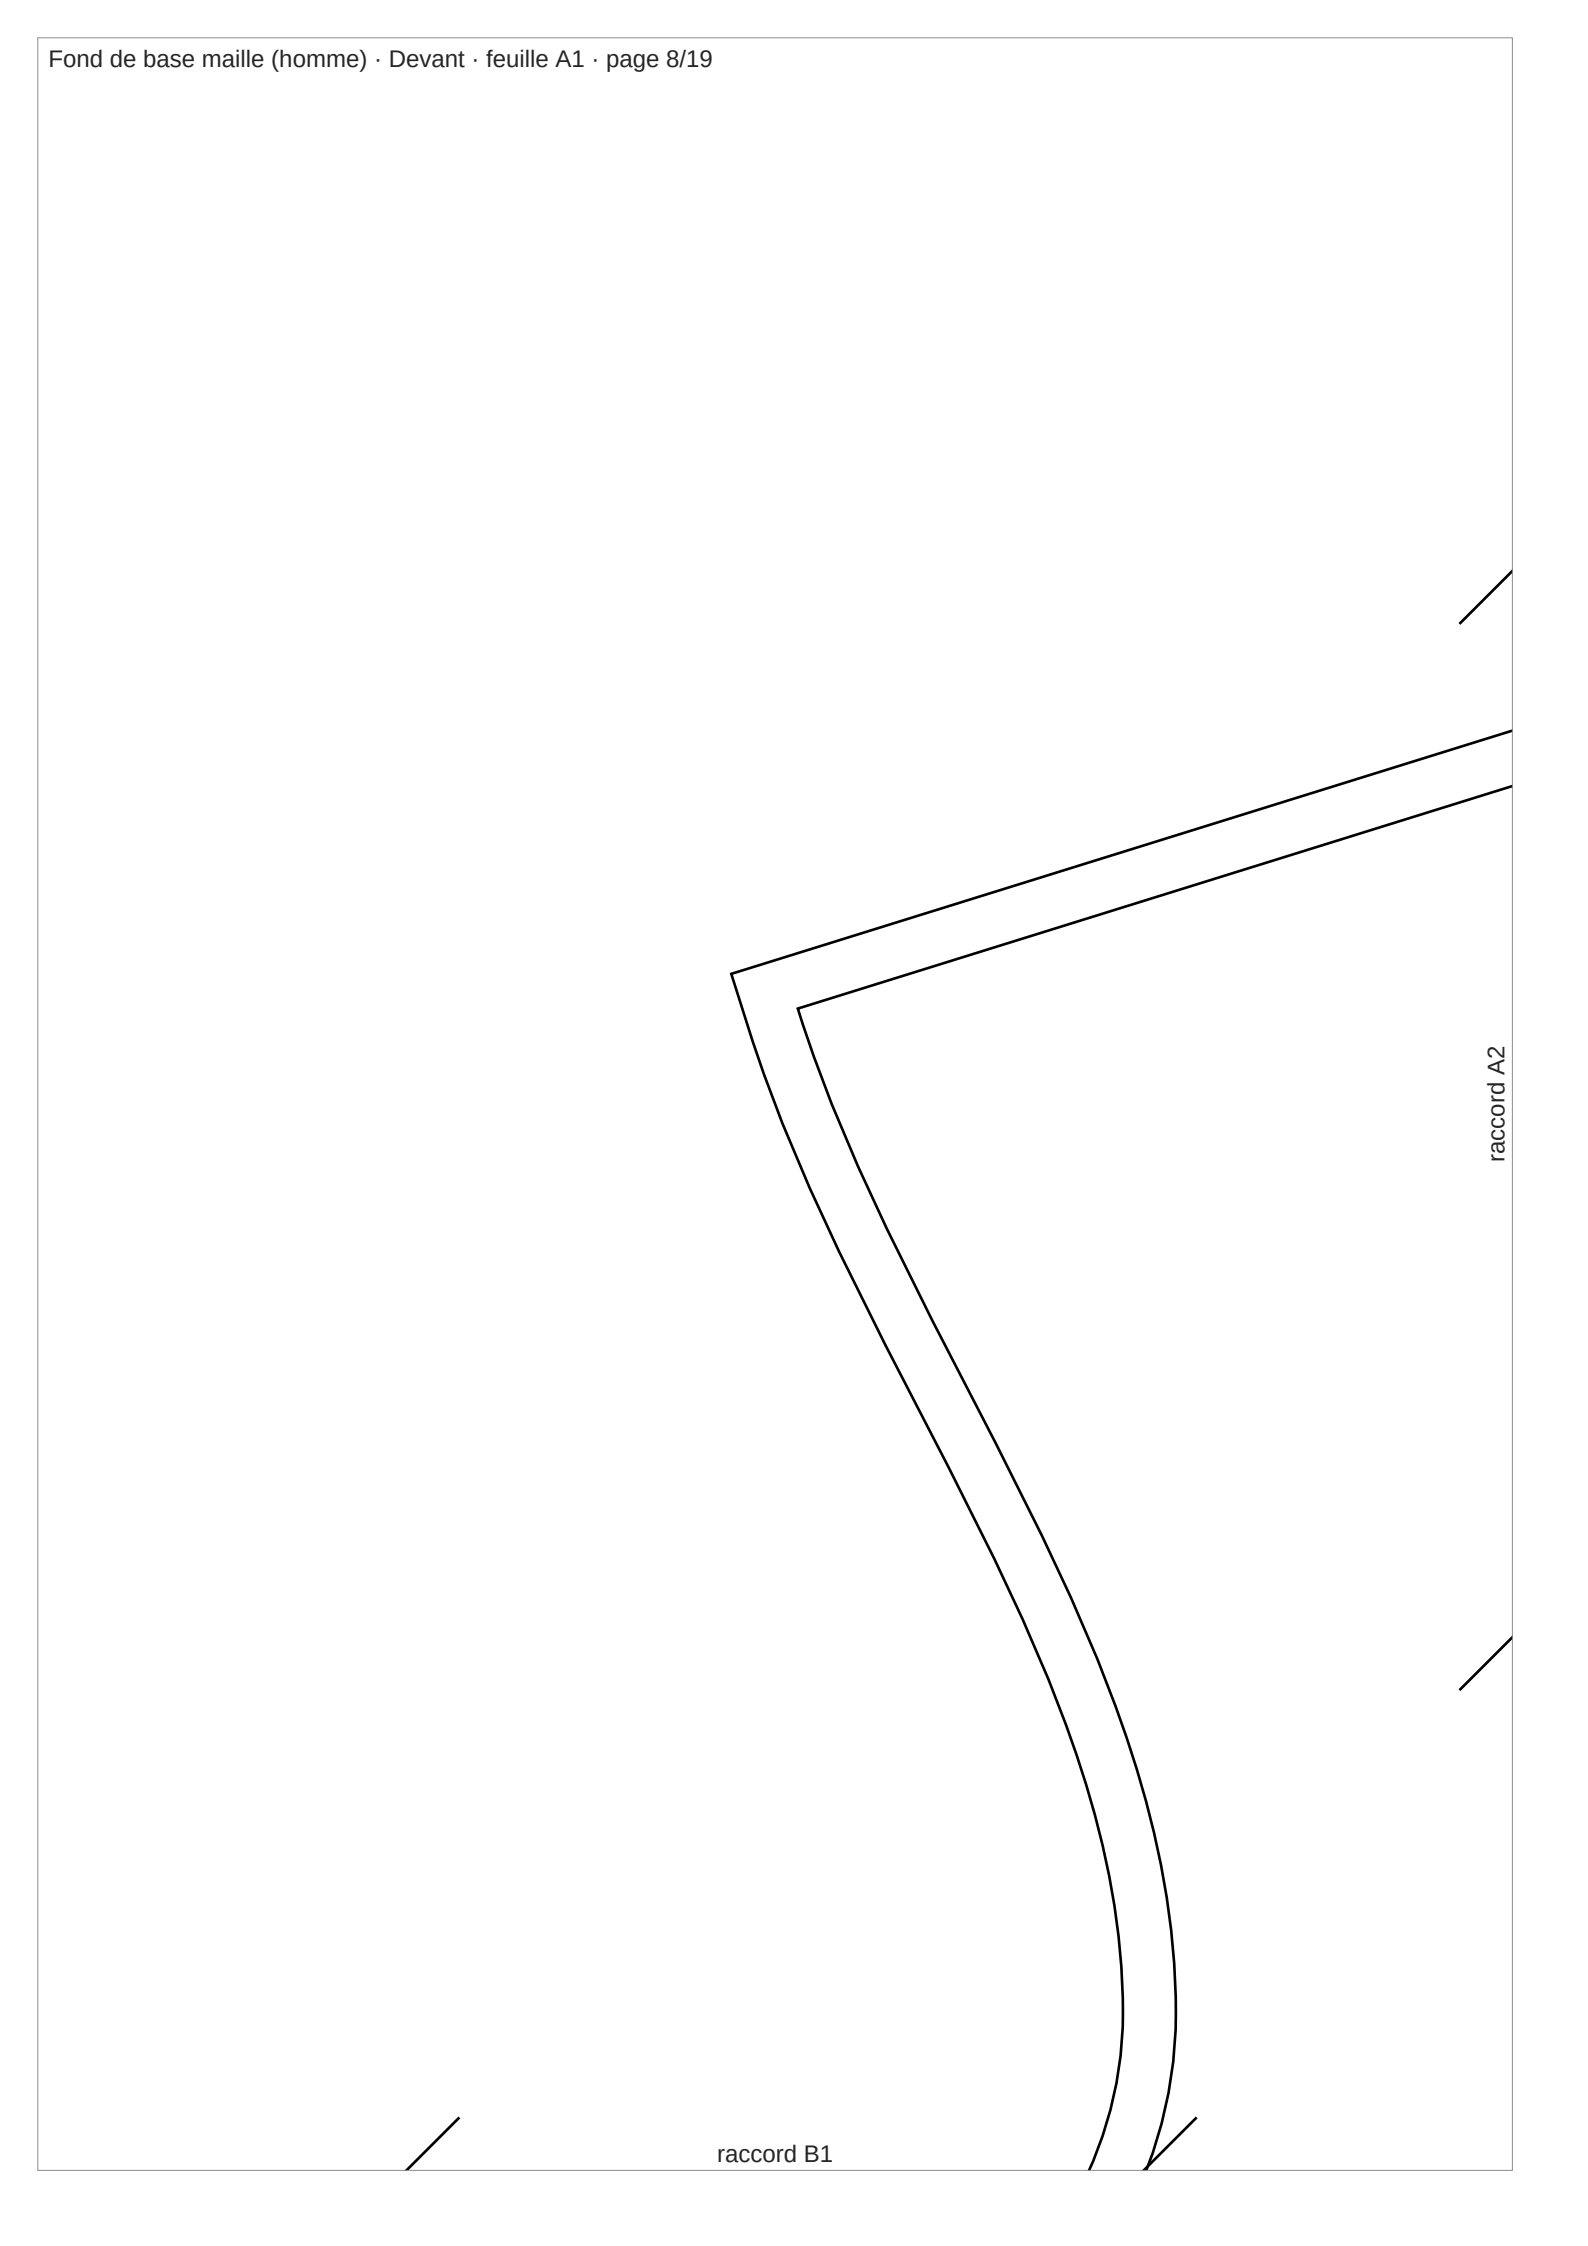
Tissu X2

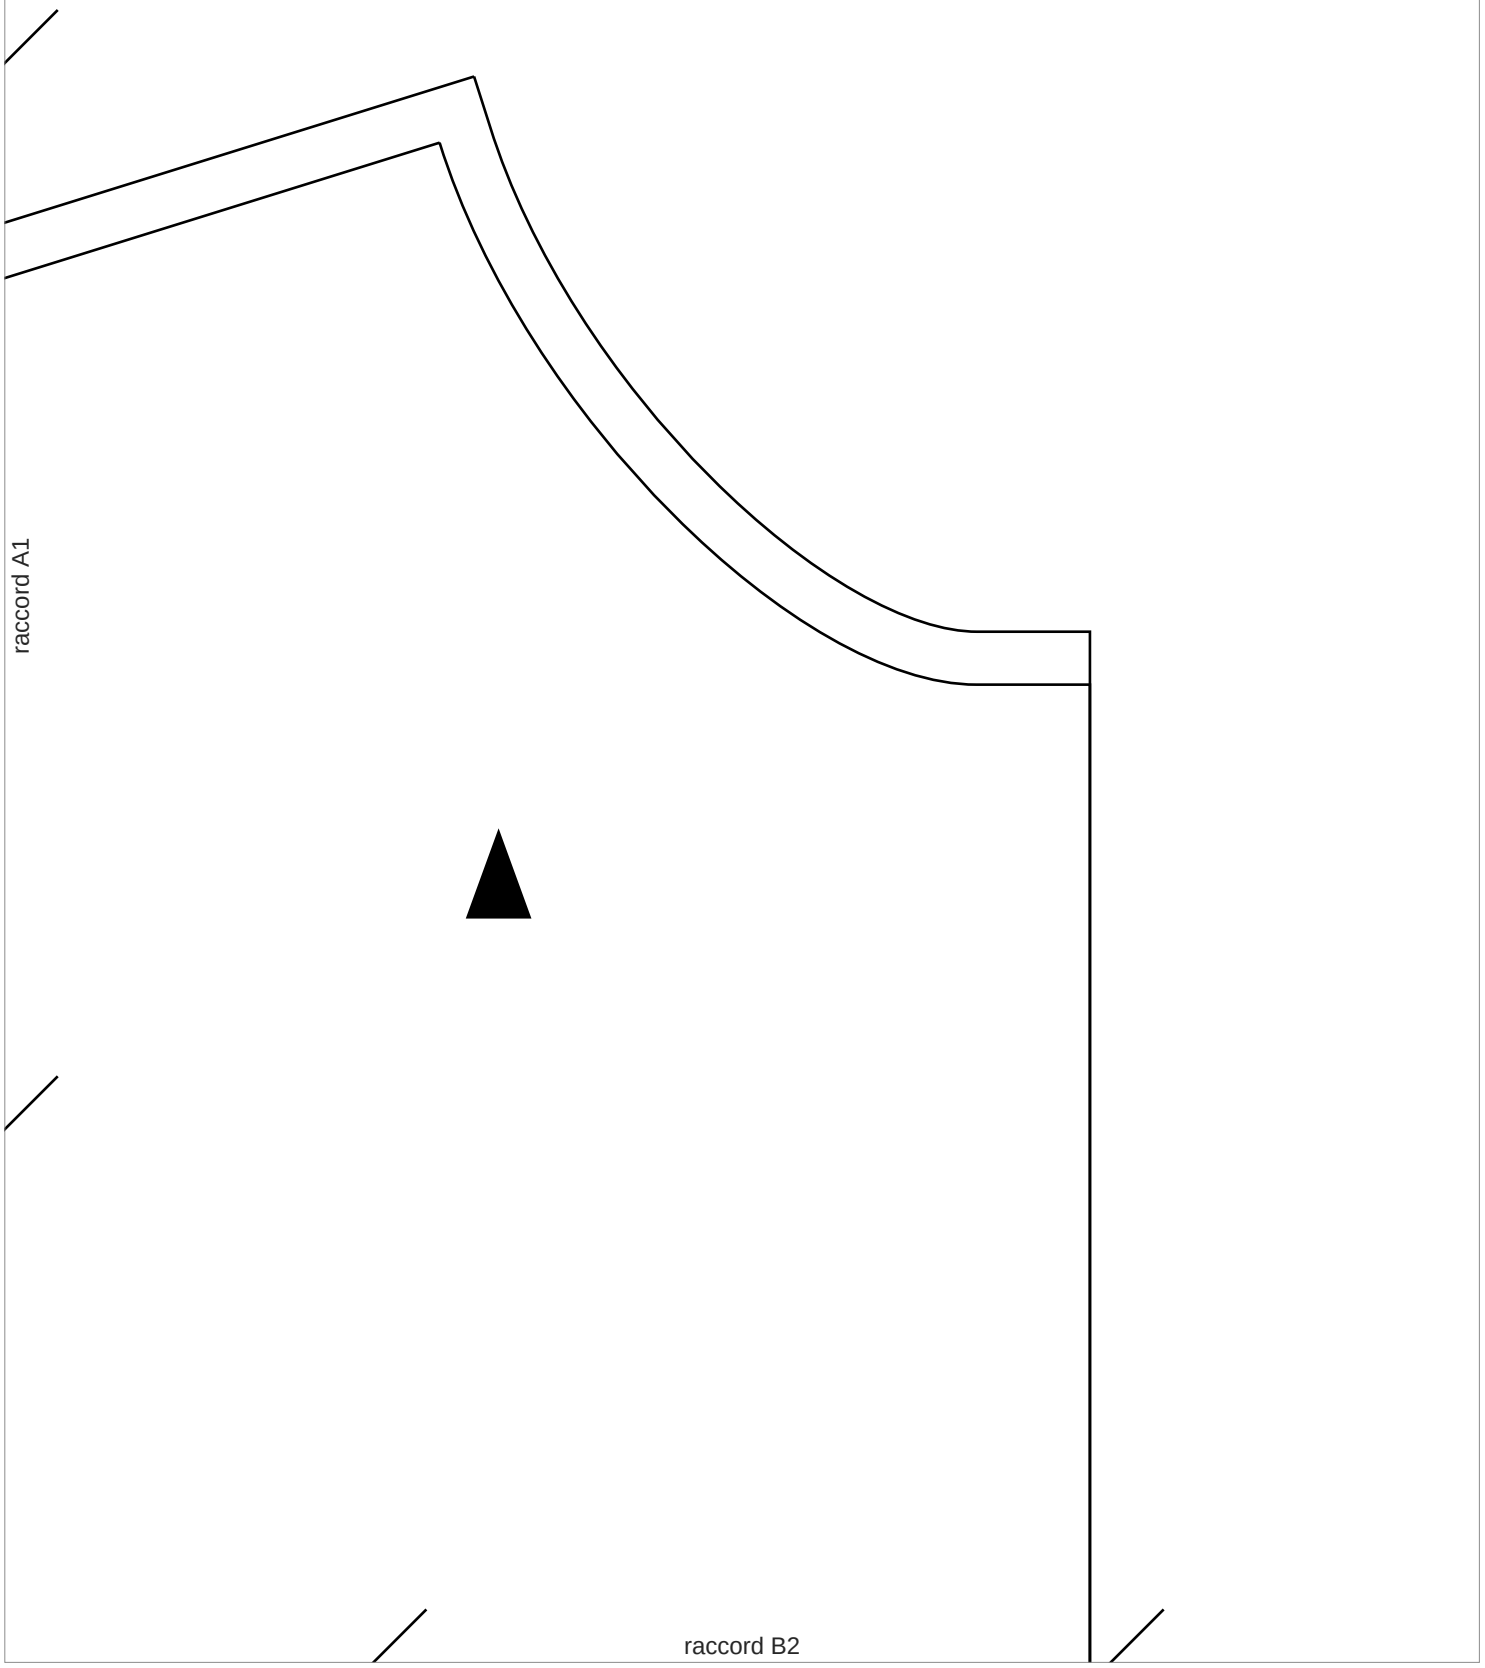
raccord B1

raccord C2

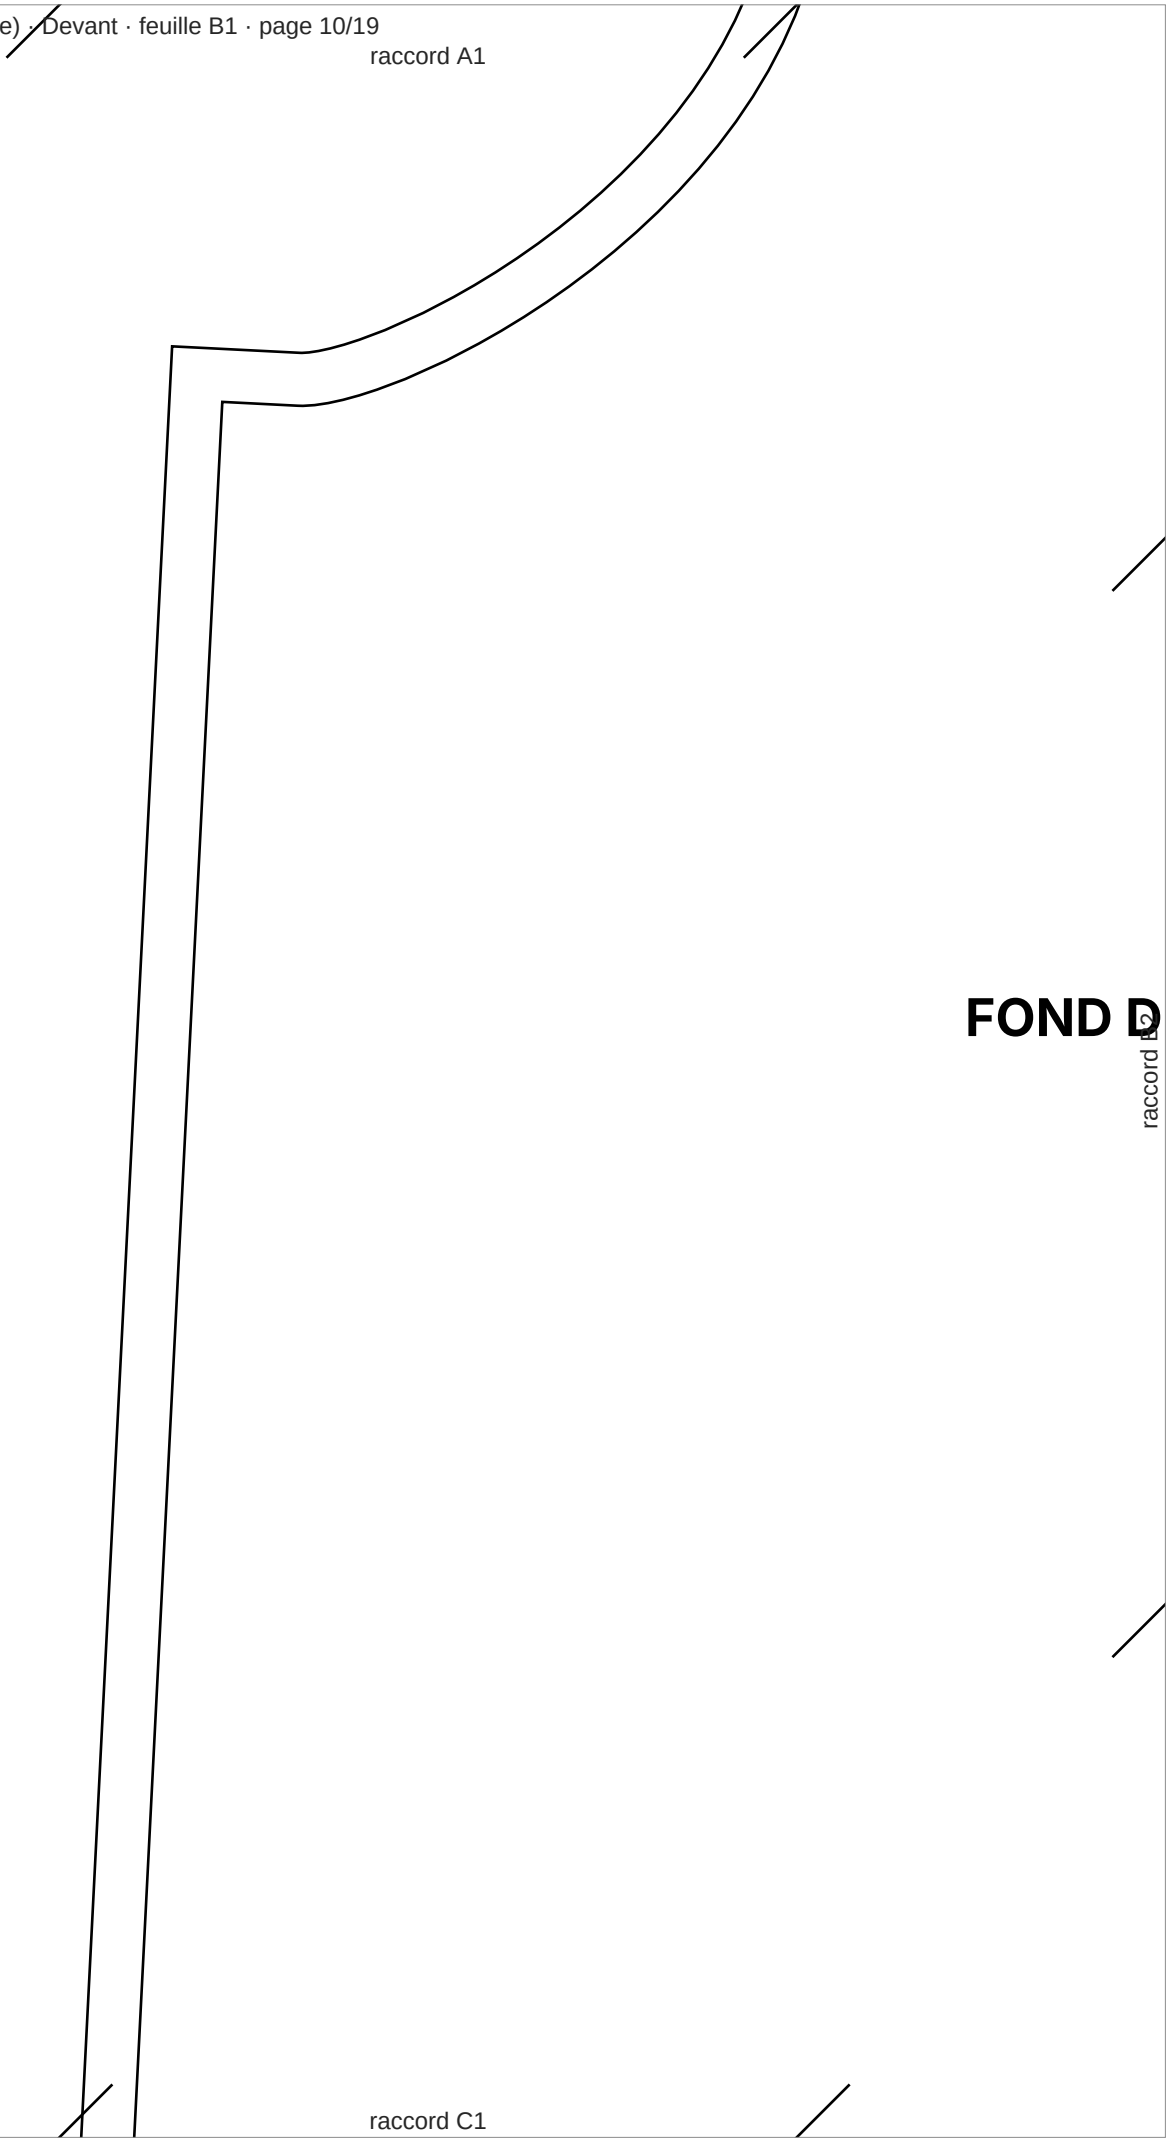

raccord B1
raccord C2


raccord B2
raccord C1


raccord A2
raccord B1


raccord A1
raccord B2

raccord A1



FOND D

raccord B2

raccord C1

raccord A2

E BASE MAILLE

Base

T54

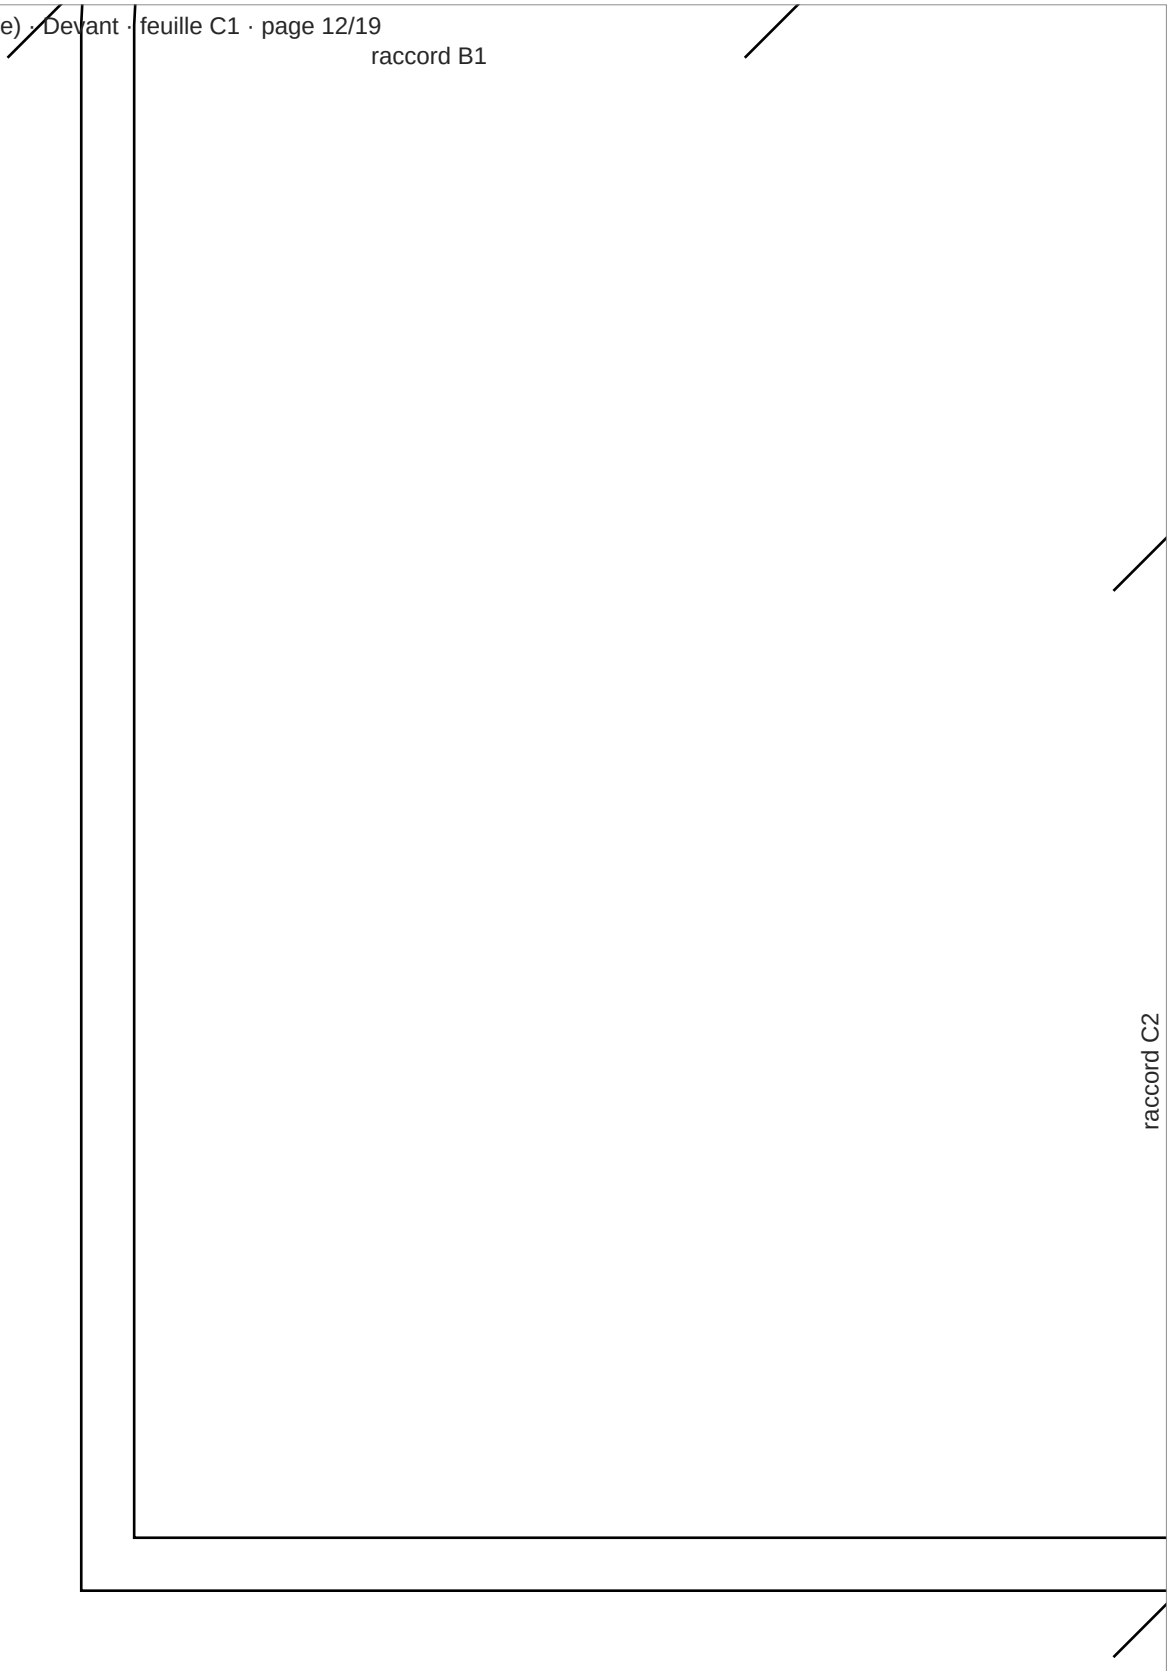
raccord B2

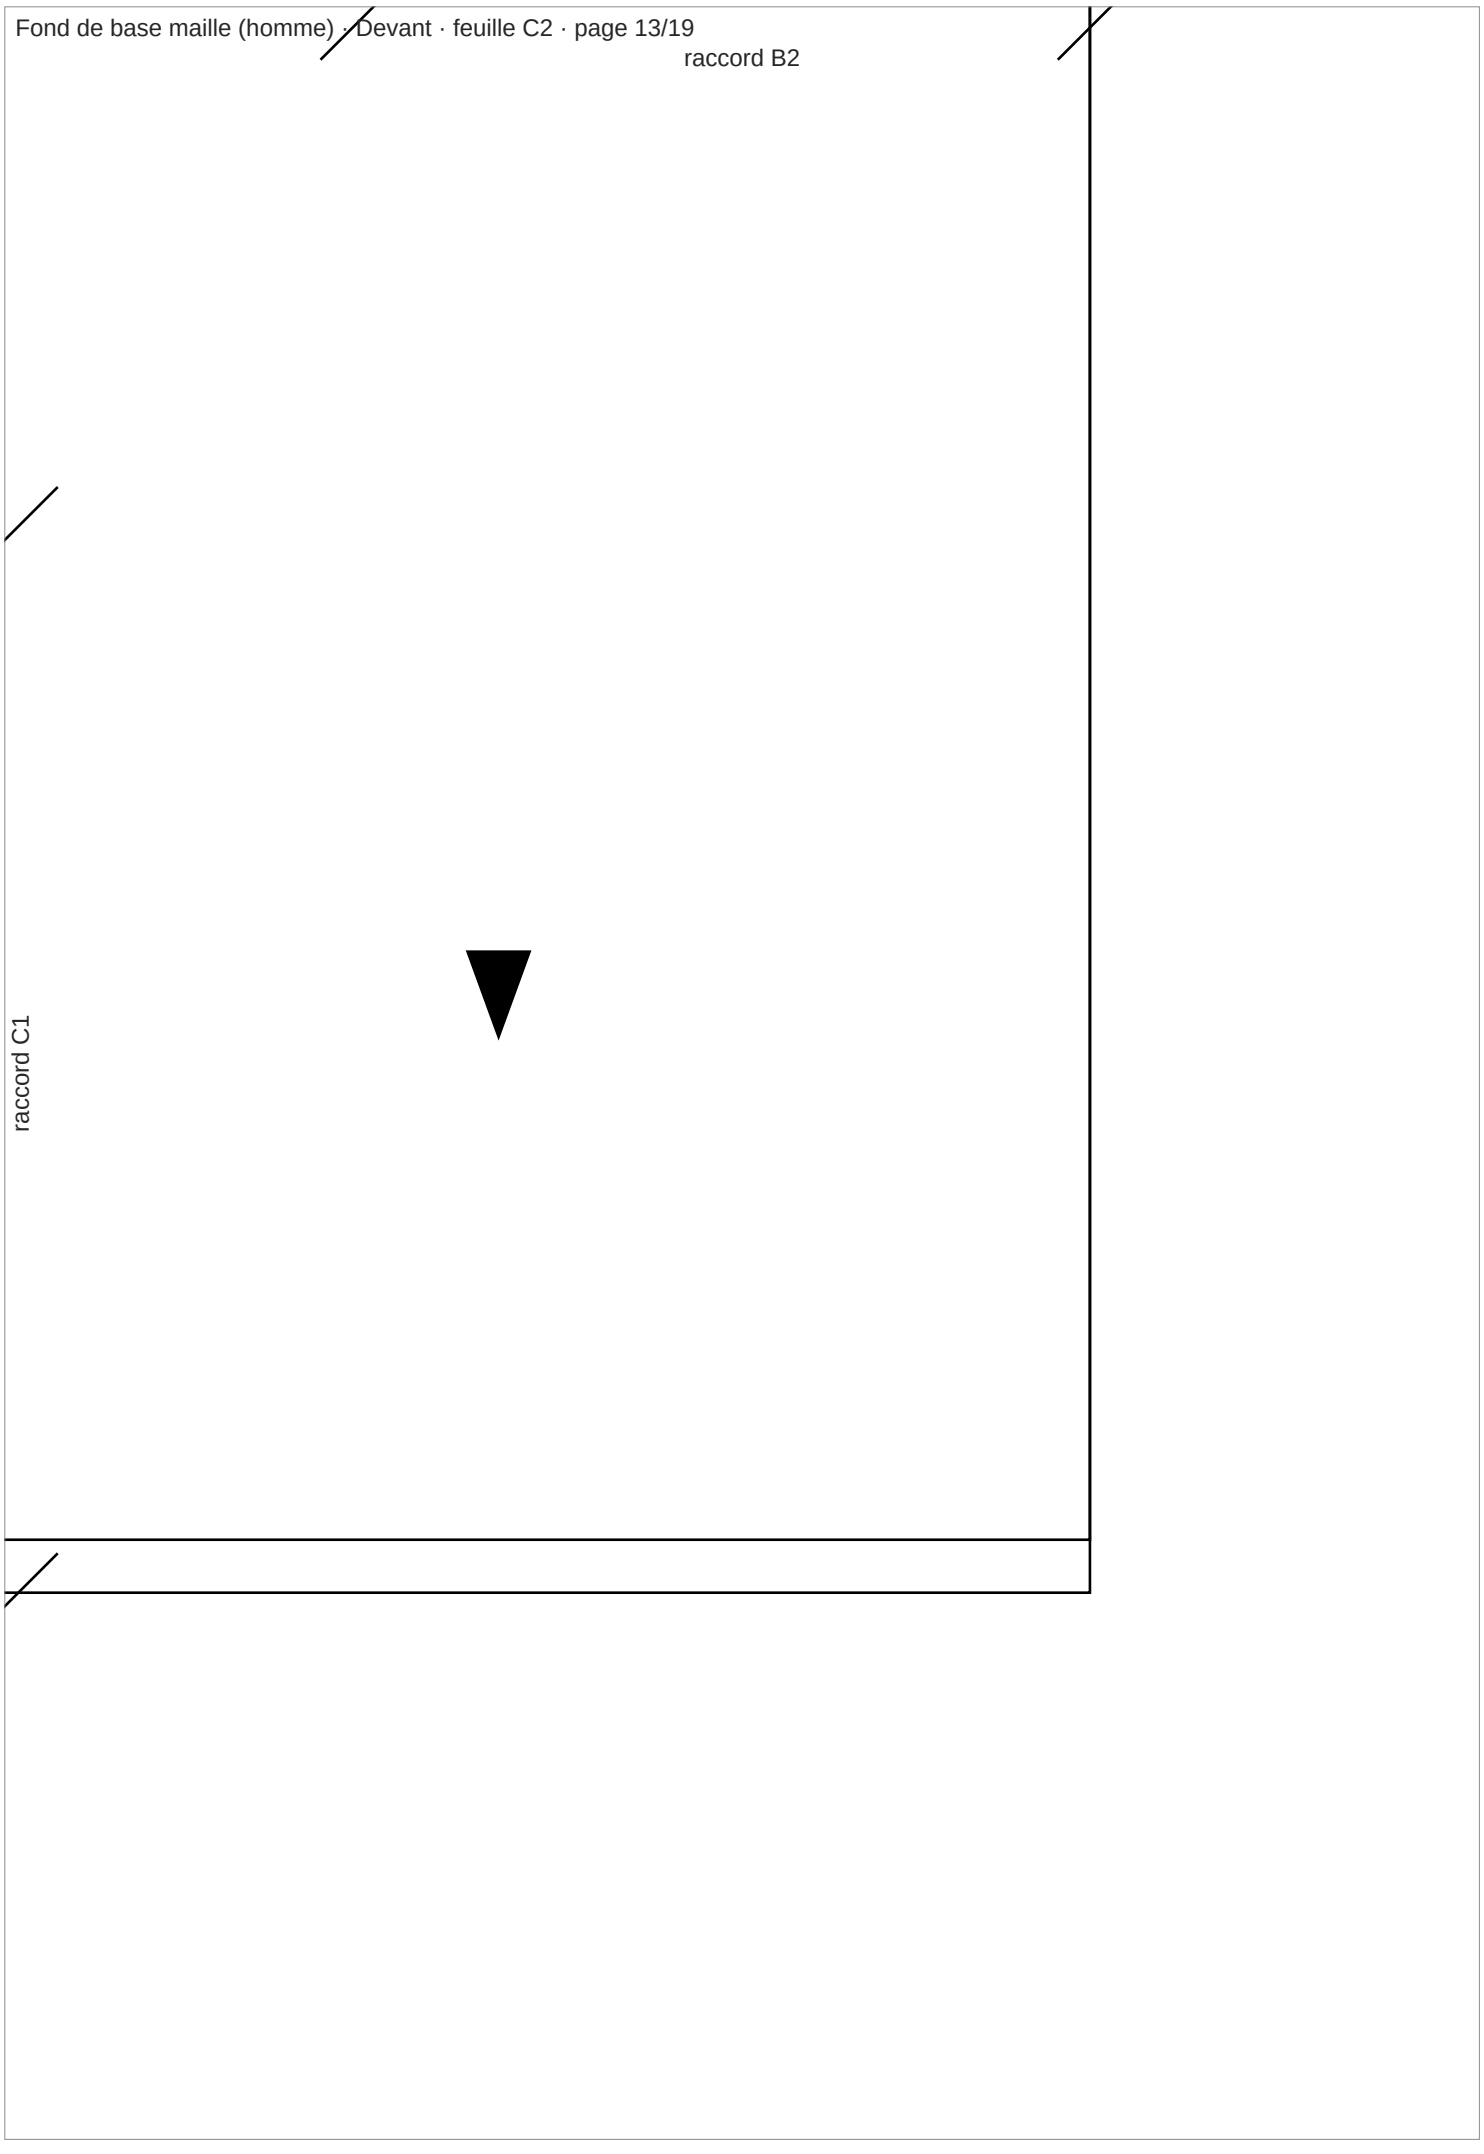
Droit fil

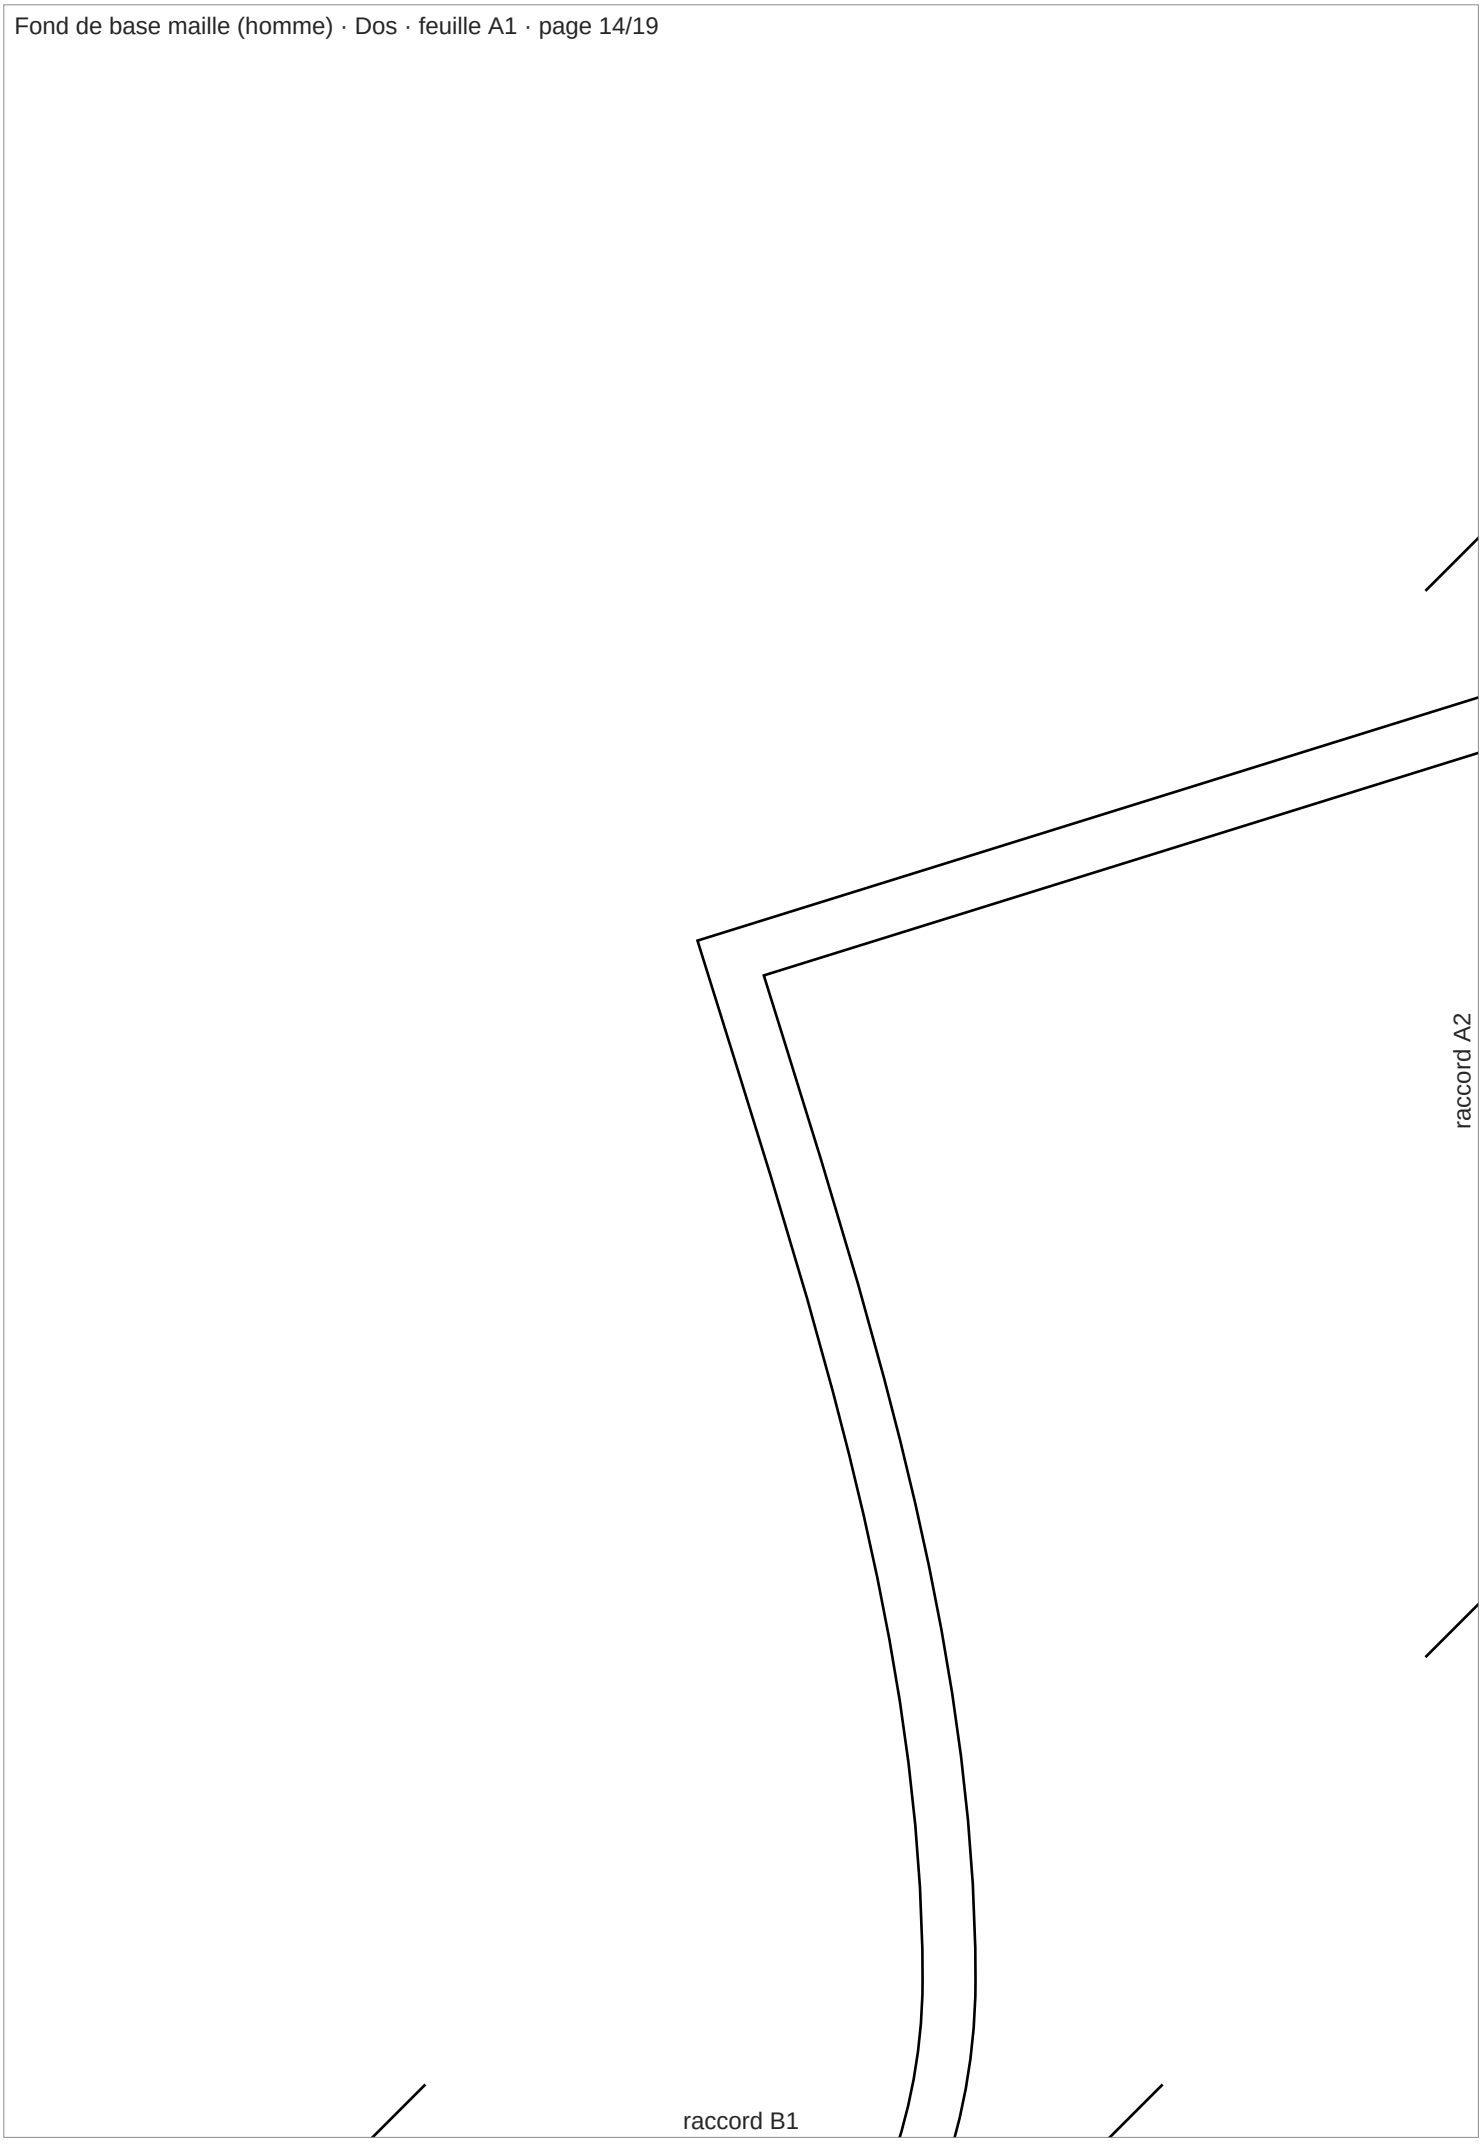
Devant

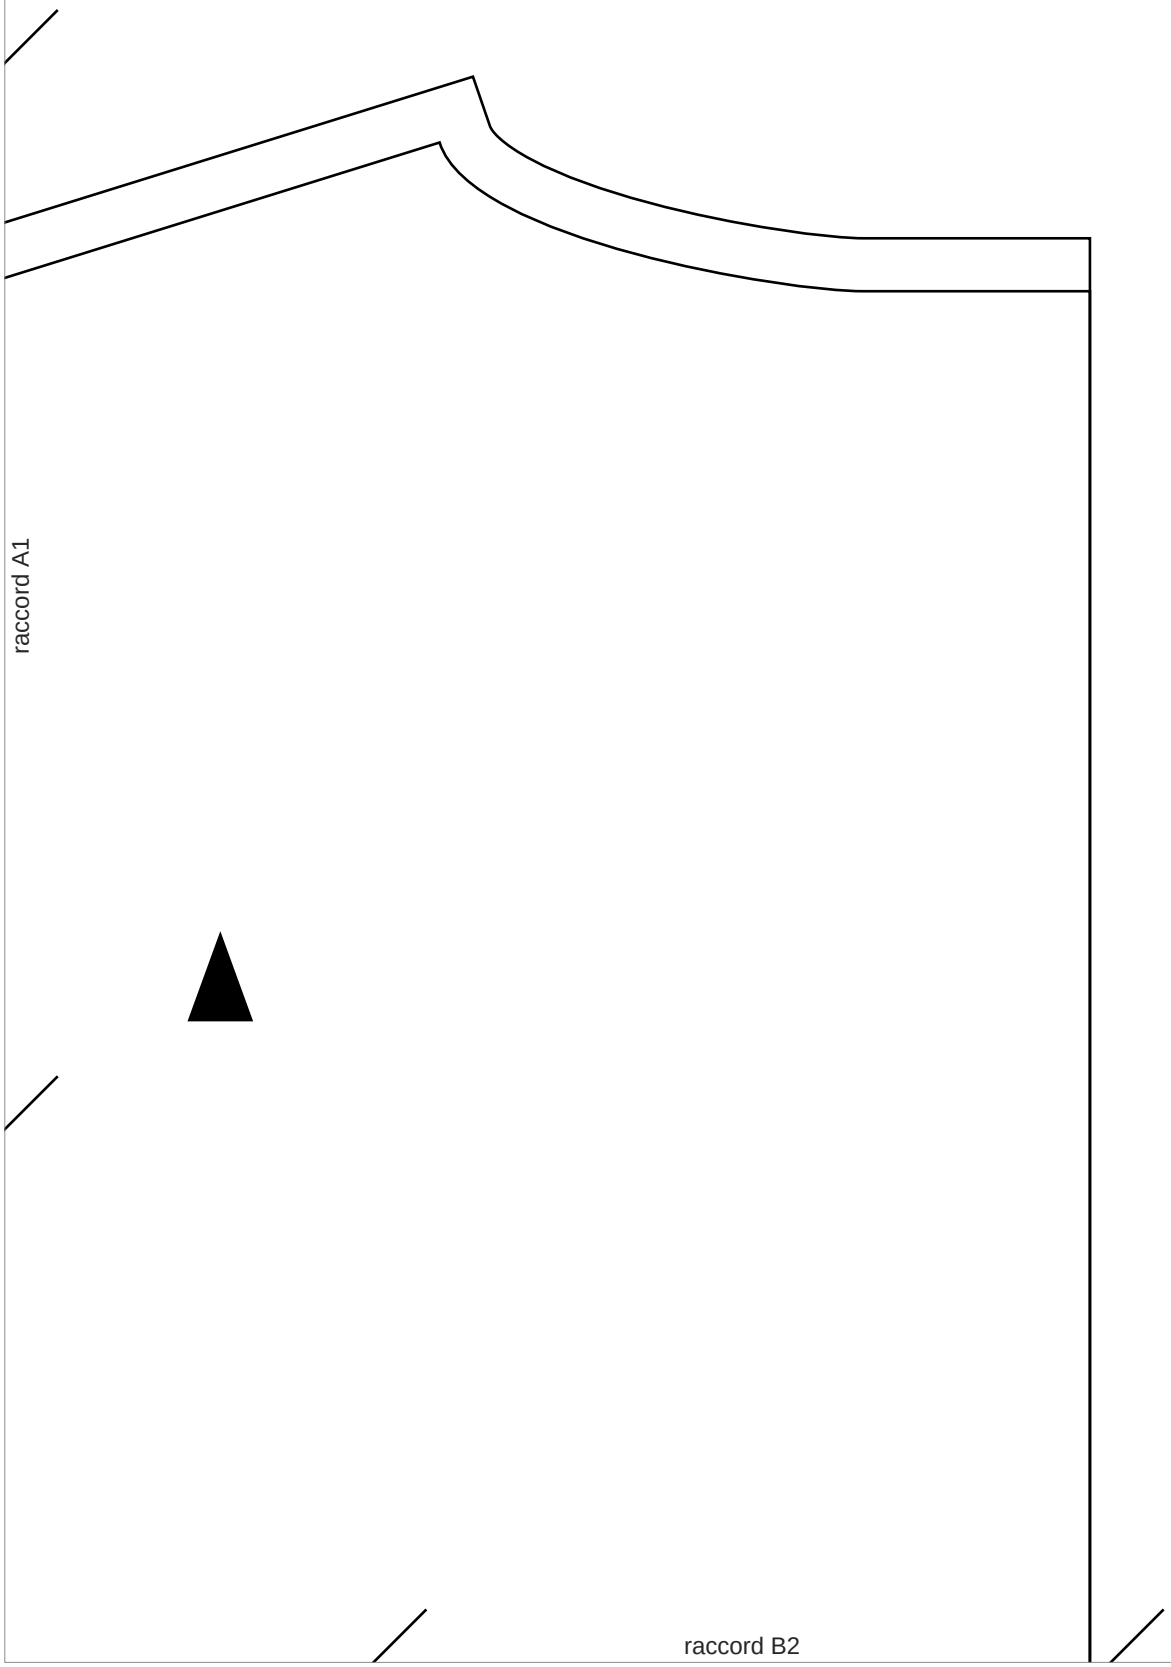
Tissu X1

raccord C2

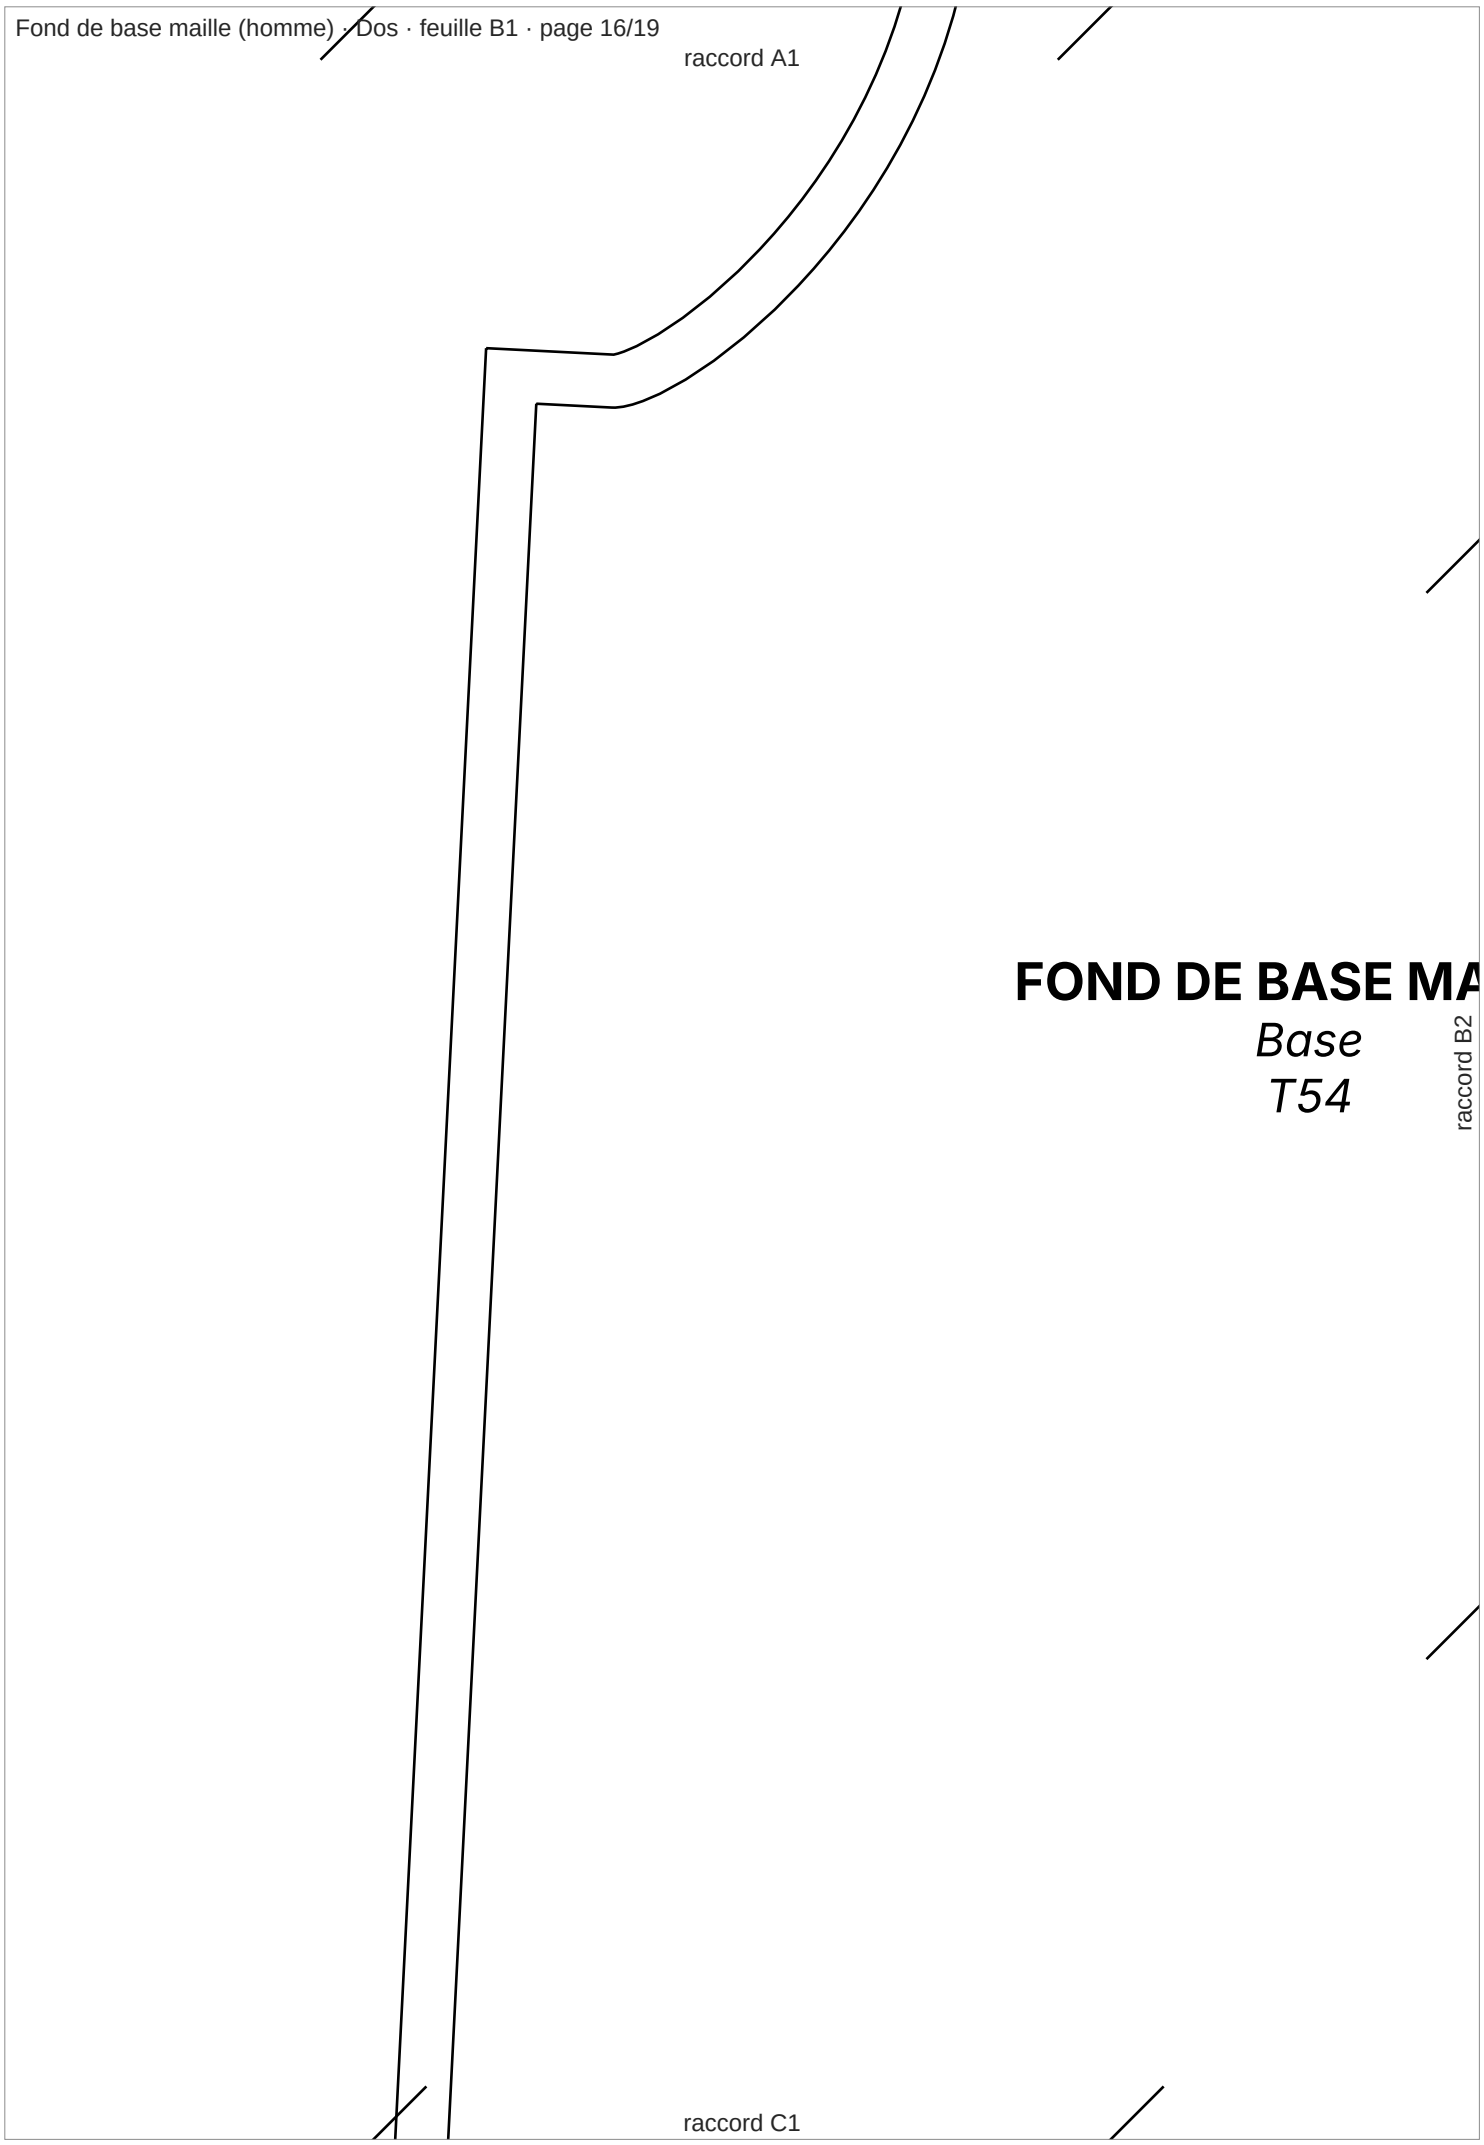

raccord B1
raccord C2


raccord B2
raccord C1


raccord A2
raccord B1


raccord A1
raccord B2

raccord A1



FOND DE BASE MA

Base
T54

raccord B2

raccord C1

raccord A2

AILLE

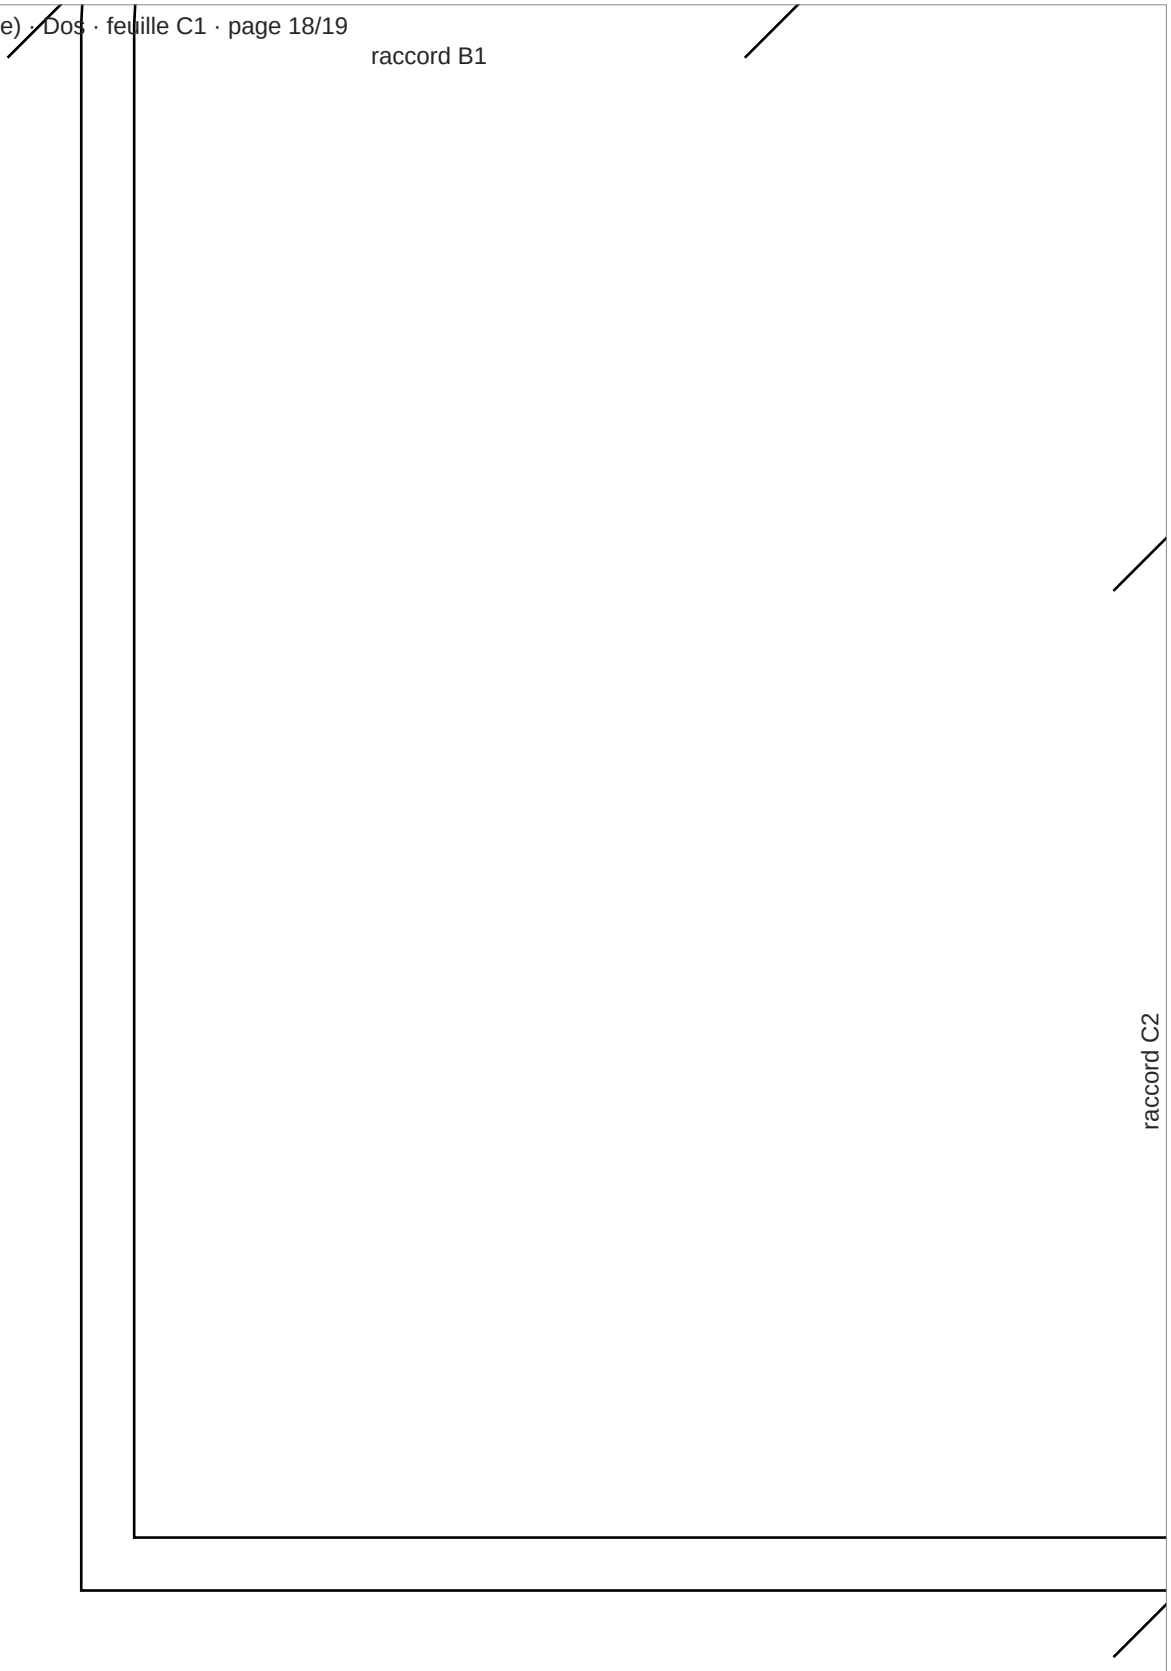
raccord B1

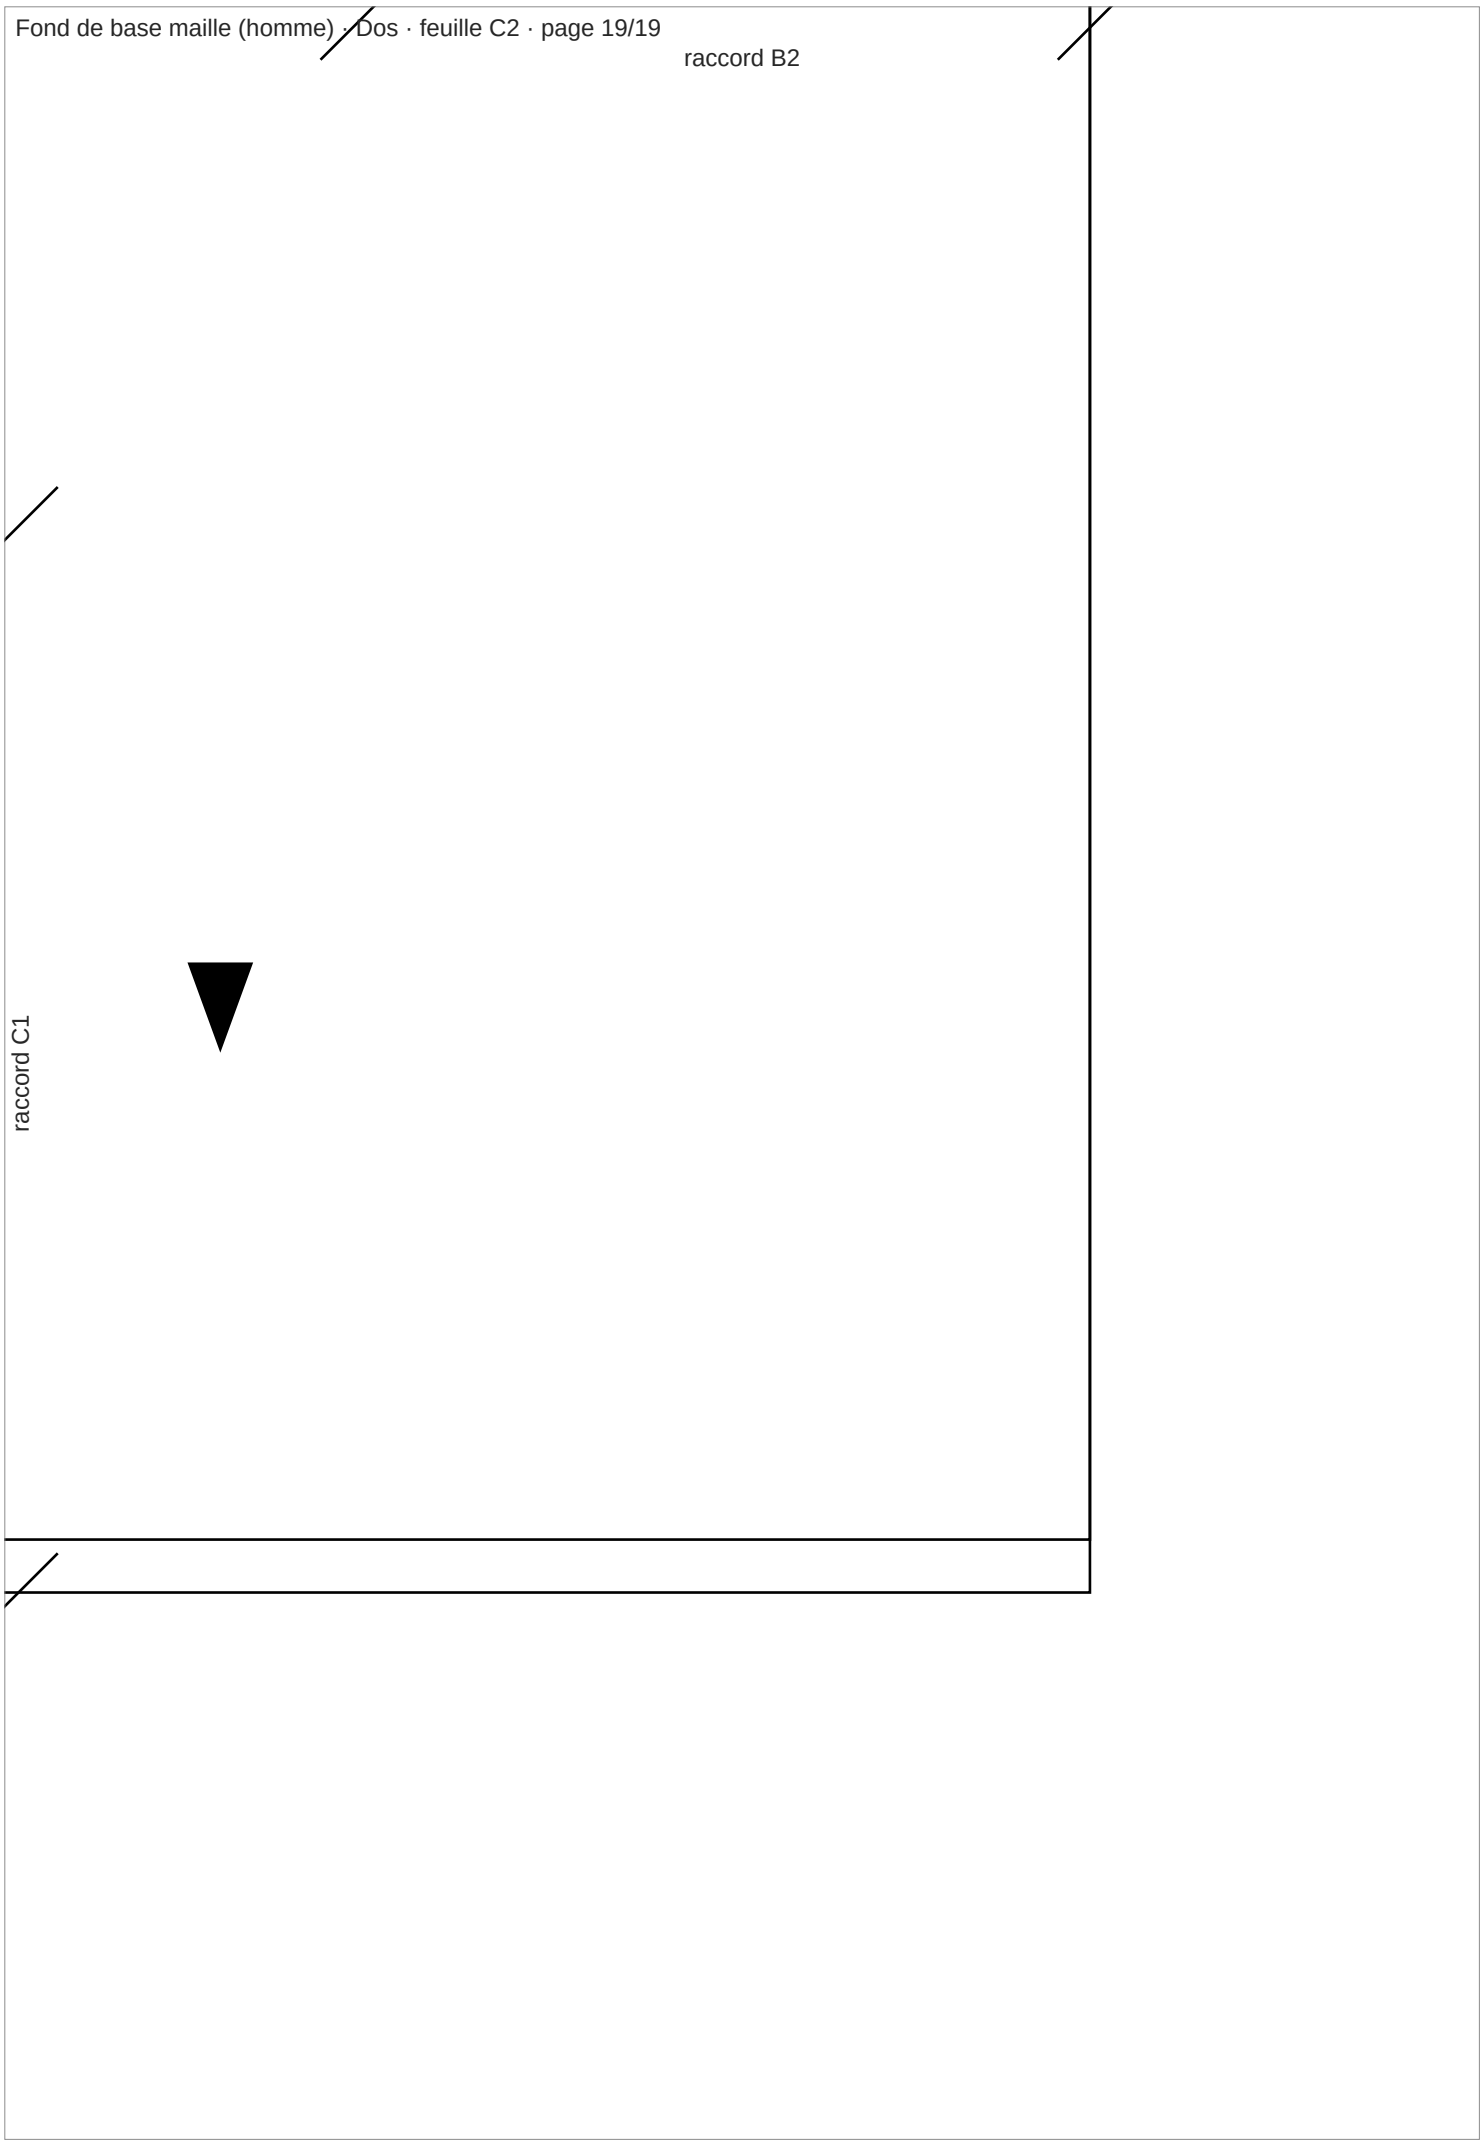
Dos

Tissu X1

Droit fil

raccord C2


raccord B1
raccord C2


raccord B2
raccord C1