
# CONNECTOR NO.2

25 × 25mm (1" x 1") Tube x Female Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **52220LF**

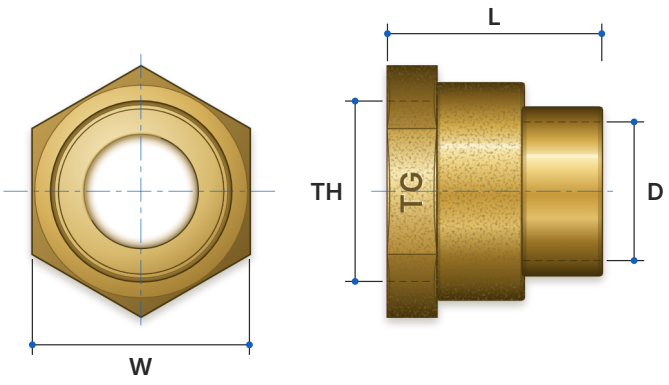





## SIZING CHART (MM)

| Part No. | L | W | D | TH |
|---|---|---|---|---|
| 52220LF | 39.5 | 40.0 | 25.45 - 25.56 | G 1" |

L = overall length. W = hex across flats. D = capillary socket bore for copper tube (min - max). TH = female thread. All dimensions in millimetres.

## SPECIFICATIONS

Working Temperature **1°C to 95°C**

Maximum Pressure Rating **1600 kPa**

Connection **1" OD copper (capillary) x G 1" female** (BSP parallel)

## MATERIAL CHART

| Part | Material |
|---|---|
| Connector | DR Lead Free Brass (CW511L) |

## STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WMKA02551**
Certified to **AS 3688**
Lead Free

## FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- Threads to AS 1722.2
- Tested and certified to AS 3688


For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au


ISO 9001 Certified
Quality Management System


Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.