
CONNECTOR NO.2

32 × 32mm (1¼" x 1¼") Tube x Female Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **52222LF**

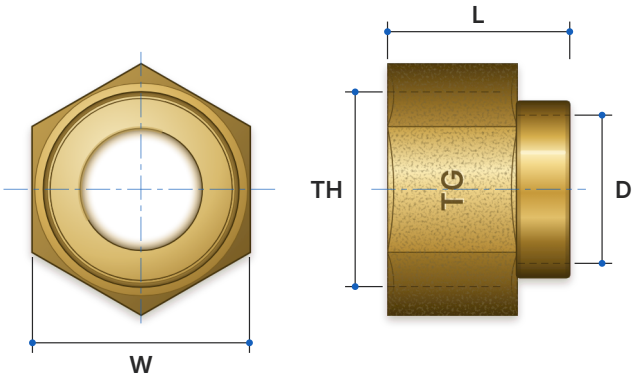



SIZING CHART (MM)

Part No.	L	W	D	TH
52222LF	39.2	46.7	31.77 - 31.91	G 1-1/4"

L = overall length. W = hex across flats. D = capillary socket bore for copper tube (min - max). TH = female thread. All dimensions in millimetres.

SPECIFICATIONS

Working Temperature **1°C to 95°C**

Maximum Pressure Rating **1600 kPa**

Connection **1¼" OD copper (capillary) x G 1-1/4" female** (BSP parallel)

MATERIAL CHART

Part	Material
Connector	DR Lead Free Brass (CW511L)

STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WMKA02551**
Certified to **AS 3688**
Lead Free

FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- Threads to AS 1722.2
- Tested and certified to AS 3688

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ATLAS CERTIFICATION ISO 9001 · JAS-ANZ WWW.JASANZ.ORG/REGISTER

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.