
CONNECTOR NO.3

20 × 20mm (3/4" x 3/4") Tube x Male Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **52242LF**

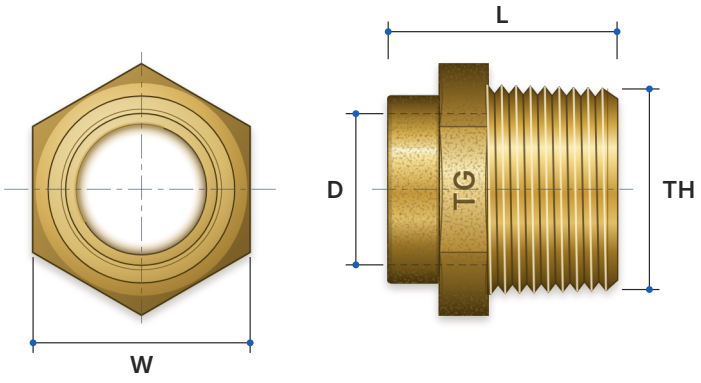



SIZING CHART (MM)

Part No.	L	W	D	TH
52242LF	29.0	27.5	19.09 - 19.17	R 3/4"

L = overall length. W = hex across flats. D = capillary socket bore for copper tube (min - max). TH = male thread. All dimensions in millimetres.

SPECIFICATIONS

Working Temperature **1°C to 95°C**

Maximum Pressure Rating **1600 kPa**

Connection **3/4" OD copper (capillary) x R 3/4" male** (BSPT taper)

MATERIAL CHART

Part	Material
Connector	DR Lead Free Brass (CW511L)

STANDARDS & APPROVALS

W Lead Free

WaterMark Licence **WMKA02551**
Certified to **AS 3688**
Lead Free

FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- Threads to AS ISO 7.1
- Tested and certified to AS 3688

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ATLAS CERTIFICATION ISO 9001 · JAS-ANZ WWW.JASANZ.ORG/REGISTER

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.