
COMPRESSION TEE FEM

15mm (1/2") Compression x Female 1/2" branch, nyl

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **54072LF**

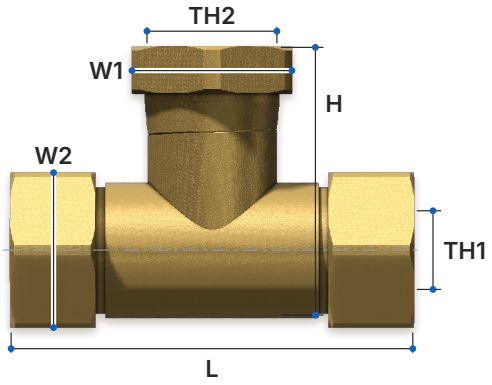



SIZING CHART (MM)

Part No.	L	H	W1	W2	TH1	TH2
54072LF		43.2	25.8	25.0	1/2" copper tube	G 1/2"

L = overall length across the run, assembled. H = bottom of run body to branch thread face. W1 = branch hex across flats. W2 = compression nut across flats. TH1 = run (tube). TH2 = branch. All dimensions in millimetres.

STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WM-002387**
Certified to **AS 3688**
Lead Free

SPECIFICATIONS

- Connection **1/2" copper tube x G 1/2" female**
- Maximum Pressure Rating **1600 kPa**
- Working Temperature **1°C to 95°C**

FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- Nylon olive included
- Tested and certified to AS 3688

MATERIAL CHART

Part	Material
Body	DR Lead Free Brass (CW511L)
Compression nut	DR Lead Free Brass (CW511L)
Olive	Nylon

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.