
# FLARE UNION FEMALE

15mm (1/2") 60° Flare x G 1/2" Female Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **56040LF**

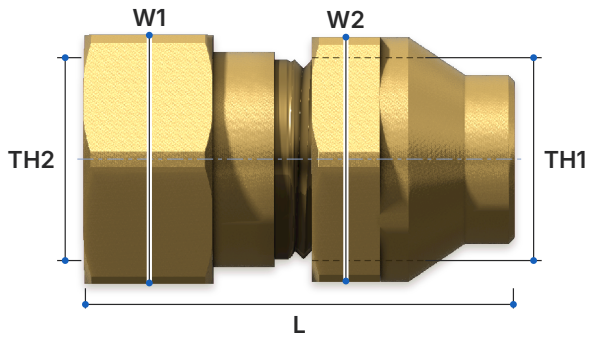




## SIZING CHART (MM)

| Part No. | L | W1 | W2 | TH1 | TH2 |
|---|---|---|---|---|---|
| 56040LF | | 25.6 | 25.2 | G 1/2" 60° flare | G 1/2" |

L = overall length assembled. W1 = body hex across flats. W2 = flare nut across flats. TH1 = flare nut end. TH2 = body end. All dimensions in millimetres.

## SPECIFICATIONS

Connection **G 1/2" 60° flare x G 1/2" female**

Maximum Pressure Rating **1600 kPa**

Working Temperature **1°C to 95°C**

## MATERIAL CHART

| Part | Material |
|---|---|
| Body | DR Lead Free Brass (CW511L) |
| Flare nut | DR Lead Free Brass (CW511L) |

## STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WM-002387**
Certified to **AS 3688**
Lead Free

## FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- 60° cone flare seat
- Tested and certified to AS 3688


For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au


ISO 9001 Certified
Quality Management System


Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.