
FLARE UNION MALE

10mm (3/8") 60° Flare x R 1/2" Male Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **56078LF**

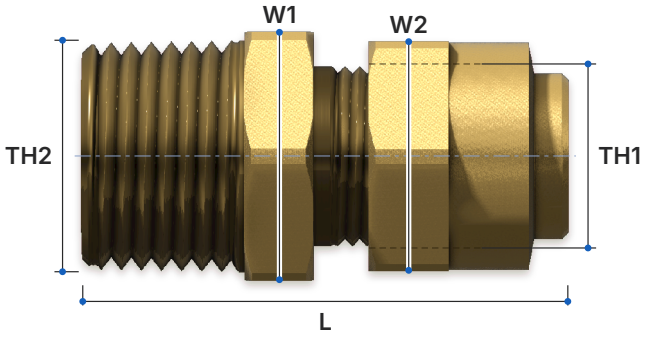



SIZING CHART (MM)

Part No.	L	W1	W2	TH1	TH2
56078LF		22.4	20.7	G 3/8" 60° flare	R 1/2"

L = overall length assembled. W1 = body hex across flats. W2 = flare nut across flats. TH1 = flare nut end. TH2 = body end. All dimensions in millimetres.

SPECIFICATIONS

Connection **G 3/8" 60° flare x R 1/2" male**

Maximum Pressure Rating **1600 kPa**

Working Temperature **1°C to 95°C**

MATERIAL CHART

Part	Material
Body	DR Lead Free Brass (CW511L)
Flare nut	DR Lead Free Brass (CW511L)

STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WM-002387**
Certified to **AS 3688**
Lead Free

FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- 60° cone flare seat
- Tested and certified to AS 3688

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ATLAS CERTIFICATION ISO 9001 · JAS-ANZ WWW.JASANZ.ORG/REGISTER

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.