
HOSE COCK

15mm (1/2") x 20mm (3/4") Ball Valve Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **71016LF**

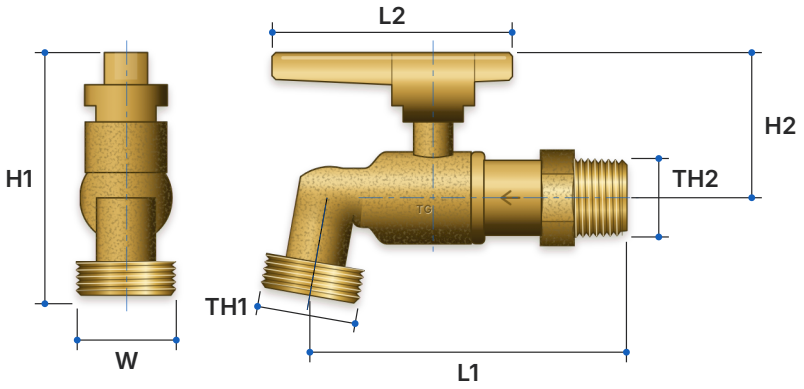



SIZING CHART (MM)

Part No.	L1	L2	H1	H2	W	TH1	TH2
71016LF	84.5	64.0			26.4	G 3/4"	R 1/2"

L1 = main outlet face centre to inlet face. L2 = lever handle length. H1 = top of lever to bottom of outlet. H2 = top of lever to inlet centreline. W = overall width (end view). TH1 = outlet (male, hose connection). TH2 = inlet (male taper). All dimensions in millimetres.

STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WM-002386**
Certified to **AS 3718**
Lead Free

SPECIFICATIONS

- Connection **R 1/2" male inlet x G 3/4" male hose outlet**
- Maximum Pressure Rating **1600 kPa**
- Working Temperature **1°C to 95°C**

FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- Quarter-turn ball valve with PTFE seats
- Tested and certified to AS 3718

MATERIAL CHART

Part	Material
Body, ball and handle	DR Lead Free Brass (CW511L)
Ball seats	PTFE
Spindle O-ring	Nitrile rubber

For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au

ISO 9001 Certified
Quality Management System

Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.