
# DOUBLE HOSE COCK

20mm (3/4") x 25mm (1") Male Lead Free

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **71024LF**

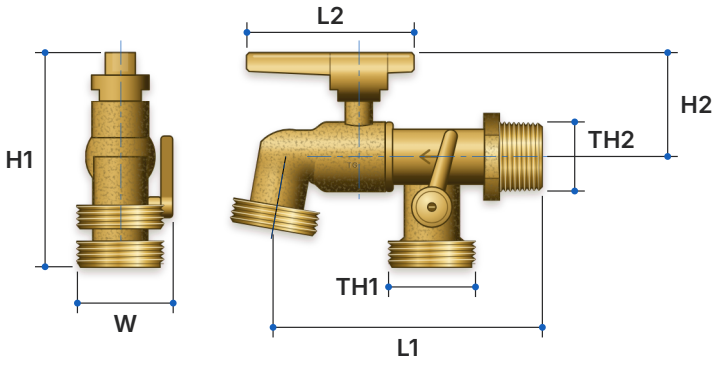





## SIZING CHART (MM)

| Part No. | L1 | L2 | H1 | H2 | W | TH1 | TH2 |
|---|---|---|---|---|---|---|---|
| 71024LF | 103.0 | 64.0 | | | | G 1" | R 3/4" |

L1 = main outlet face centre to inlet face. L2 = lever handle length. H1 = top of lever to bottom of outlet. H2 = top of lever to inlet centreline. W = overall width (end view). TH1 = outlets (male hose, both). TH2 = inlet (male taper). All dimensions in millimetres.

## STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WM-002386**
Certified to **AS 3718**
Lead Free

## SPECIFICATIONS

Connection **R 3/4" male inlet x 2 x G 1" male hose outlets**

Maximum Pressure Rating **1600 kPa**

Working Temperature **1°C to 95°C**

## FEATURES

- WaterMark Lead Free Approved
- DR Lead Free Brass (CW511L) to AS 2345
- Two outlets, each with its own quarter-turn ball valve
- Tested and certified to AS 3718

## MATERIAL CHART

| Part | Material |
|---|---|
| Body, balls and handles | DR Lead Free Brass (CW511L) |
| Ball seats | PTFE |
| Spindle O-rings | Nitrile rubber |


For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au


ISO 9001 Certified
Quality Management System


Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.